



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L081910680



Report No: L081910680

Issue Date: 9/12/2019

Report Prepared For: Number Eight Lighting Company
526 Portal Street, Cotati, CA 94931

Model Number: 202-R-BV-WD-3018-60-NFL/DIM1-2-SO/FLR-2-BV-WH

Test: Photometric/Electrical Test

Standards Used: Appropriate part or all test guidelines were used for test performed:

IESNA LM79: 2008 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products

ANSI NEMA ANSLG C78.377: 2008 Specification of the Chromaticity of Solid State Lighting Products

ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition: Fixture is tested with no special conditions.

Sample Arrival Date: 8/16/19

Date of Tests: 9/9/19 - 9/12/19

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	1/9/21
BK PRECISION	1747	PS-DC04	1/10/21
Fluke Digital Thermometer	52K/J	MT-TP05	1/10/21
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

General Information

Manufacturer:	Number Eight Lighting Company
Model Number:	202-R-BV-WD-3018-60-NFL/DIM1-2-SO/FLR-2-BV-WH
Driver Model Number:	INTUITIVE SYSTEMS ISD-701-350-15-D

Photometric & Electrical Test Results

Total Lumens:	693.09
Efficacy:	47.15
Input Voltage (VAC/60Hz):	120.04
Input Current (Amp):	0.1234
Input Power (W):	14.70
Input Power Factor:	0.9923
Current ATHD (%):	7.1%

Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	1:00
Total Operating Time (Hours):	2:00

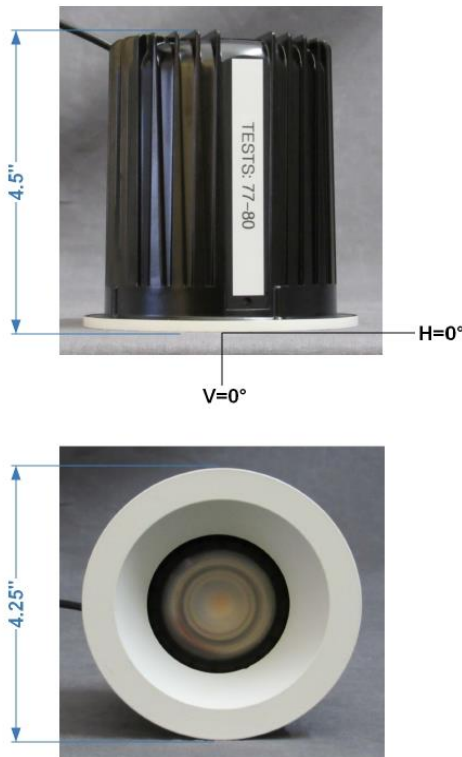


FIG. 1 LUMINAIRE

Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Keyur Patel

Test Report Reviewed by:



Steve Kang
Quality Assurance

**Attached are photometric data reports. Total number of pages: 9*



8165 E. Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Photometric Test Report

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L081910680.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L081910680
[TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
[ISSUE DATE] 9/12/2019
[MANUFAC] Number Eight Lighting Company
[LUMCAT] 202-R-BV-WD-3018-60-NFL/DIM1-2-SO/FLR-2-BV-WH
[LUMINAIRE] LED Recessed Adjustable Downlight, 0° Aiming Angle, 3000-1800K 90+ CRI, 60° Beam Spread,
[MORE] NFL Lens, Standard Output 1% Dimming Driver, Round Flanged Bevel Trim, 2.25" Aperture
[BALLASTCAT] INTUITIVE SYSTEMS ISD-701-350-15-D
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
[INPUT] 120.04VAC, 14.70W
[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	693
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	47
Total Luminaire Watts	14.7
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.90
Spacing Criterion (90-270)	0.90
Spacing Criterion (Diagonal)	0.86
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.27 ft (Diameter)
Luminous Width (90-270)	0.27 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	11859	11859	11859
55	2050	2050	2050
65	2520	2520	2520
75	2438	2438	2438
85	2133	2133	2133

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L081910680.IES

CANDELA TABULATION

	<u>0</u>
0.0	820.90
1.0	821.04
3.0	818.16
5.0	811.26
7.0	800.64
9.0	786.10
11.0	768.81
13.0	748.48
15.0	724.34
17.0	696.38
19.5	651.79
22.5	576.97
25.5	491.99
29.0	402.18
33.0	268.91
37.5	122.56
42.5	66.95
47.5	22.34
55.0	6.26
65.0	5.67
75.0	3.36
85.0	0.99
90.0	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L081910680.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	266.30	N.A.	38.40
0-30	488.79	N.A.	70.50
0-40	620.32	N.A.	89.50
0-60	680.17	N.A.	98.10
0-80	690.48	N.A.	99.60
0-90	693.09	N.A.	100.00
10-90	630.88	N.A.	91.00
20-40	354.02	N.A.	51.10
20-50	404.71	N.A.	58.40
40-70	65.51	N.A.	9.50
60-80	10.30	N.A.	1.50
70-80	4.65	N.A.	0.70
80-90	2.62	N.A.	0.40
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	693.09	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	62.21
10-20	204.08
20-30	222.50
30-40	131.52
40-50	50.69
50-60	9.17
60-70	5.66
70-80	4.65
80-90	2.62
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : L081910680.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93
2	107	102	98	95	105	101	97	94	97	94	91	94	92	90	92	89	88	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80
4	97	89	83	79	95	88	82	78	85	81	77	83	80	76	82	78	76	74
5	92	83	77	73	90	82	76	72	80	75	72	79	74	71	77	73	70	69
6	87	78	72	67	85	77	71	67	75	70	67	74	70	66	73	69	66	64
7	83	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60
8	78	69	63	59	77	68	62	58	67	62	58	66	61	58	65	61	58	56
9	75	65	59	55	74	64	59	55	63	58	55	63	58	54	62	57	54	53
10	71	61	55	52	70	61	55	51	60	55	51	59	55	51	59	54	51	50

POLAR GRAPH

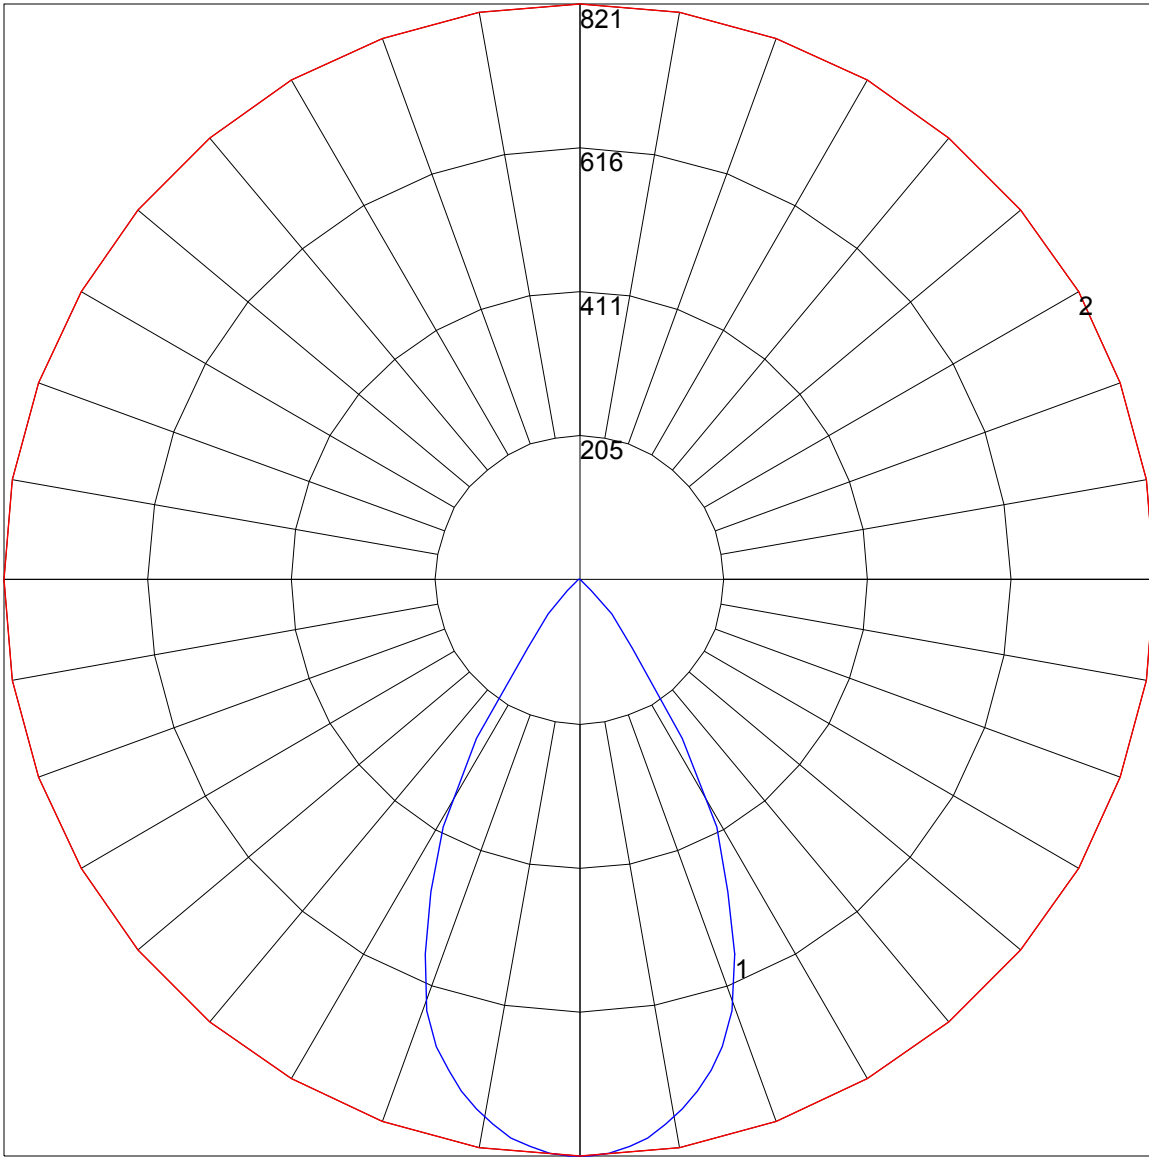

Maximum Candela = 821.04 Located At Horizontal Angle = 0, Vertical Angle = 1
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

ILLUMINANCE CONE DIAGRAM: BEAM (50%)
MOUNT HEIGHT(Ft): 12

