



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L051913402



Report No: L051913402

Issue Date: 6/7/2019

Report Prepared For: Number Eight Lighting Company
526 Portal Street, Cotati, CA 94931

Model Number: 400-HI-R-10/DIM1-4-1000/FLR-4-WH

Test: Photometric/Colorimetric/Electrical Test

Standards Used: Appropriate part or all test guidelines were used for test performed:

IESNA LM79: 2008 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products

ANSI NEMA ANSLG C78.377: 2008 Specification of the Chromaticity of Solid State Lighting Products

ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition: Fixture is tested with no special conditions.

Sample Arrival Date: 6/5/19

Date of Tests: 6/5/19 - 6/7/19

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	1/9/21
BK PRECISION	1747	PS-DC04	1/10/21
Fluke Digital Thermometer	52K/J	MT-TP05	1/10/21
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

General Information

Manufacturer:	Number Eight Lighting Company
Model Number:	400-HI-R-10/DIM1-4-1000/FLR-4-WH
Driver Model Number:	INTUITIVE SYSTEMS ISD-701-1000-15-D

Test Summary

Total Lumens:	1074.27
Efficacy:	76.53
Input Voltage (VAC/60Hz):	119.98
Input Current (Amp):	0.1178
Input Power (W):	14.04
Input Power Factor:	0.9933
Current ATHD (%):	9.6%

Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	0:30
Total Operating Time (Hours):	1:50

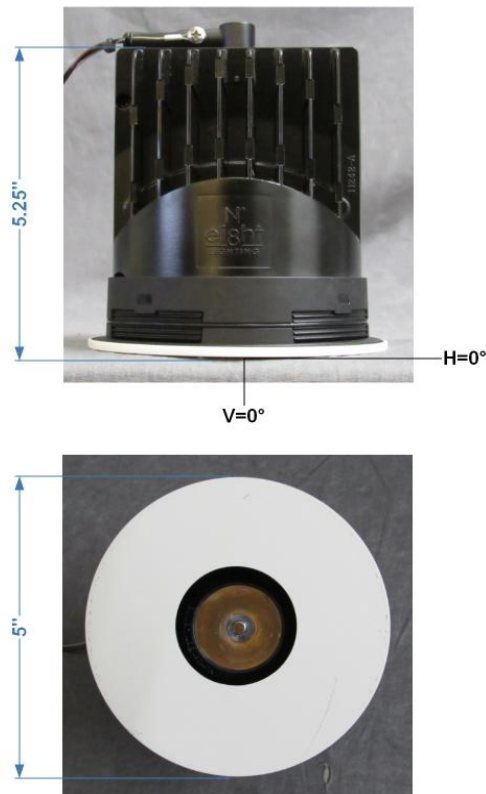


FIG. 1 LUMINAIRE

Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Dennis Malonzo

Test Report Reviewed by:



Steve Kang
Quality Assurance

**Attached are photometric data reports. Total number of pages: 9*



8165 E. Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Photometric Test Report

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L051913402.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L051913402
[TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
[ISSUE DATE] 6/7/2019
[MANUFAC] Number Eight Lighting Company
[LUMCAT] 400-HI-R-10/DIM1-4-1000/FLR-4-WH
[LUMINAIRE] LED Recessed Adjustable Downlight, 90+ CRI, 10° Beam Spread,
[MORE] 0° Aiming Angle, 2" Diameter Aperture Trim, Standard Output
[BALLASTCAT] INTUITIVE SYSTEMS ISD-701-1000-15-D
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
[INPUT] 119.98VAC, 14.04W
[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1074
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	77
Total Luminaire Watts	14.04
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.22
Spacing Criterion (90-270)	0.22
Spacing Criterion (Diagonal)	0.26
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.17 ft (Diameter)
Luminous Width (90-270)	0.17 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	2010	2010	2010
55	0	0	0
65	0	0	0
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L051913402.IES

CANDELA TABULATION

	<u>0</u>
0	14154
1	14200
2	13572
3	12359
4	10759
5	8993
6	7410
7	6157
8	5136
9	4271
10	3505
12	2211
14	1264
16	697
18	421
20	279
22	207
24	164
26	115
28	71
30	37
35	14
40	7
45	3
50	1
55	0
60	0
65	0
70	0
75	0
80	0
85	0
90	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L051913402.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	997.45	N.A.	92.80
0-30	1060.38	N.A.	98.70
0-40	1071.39	N.A.	99.70
0-60	1074.27	N.A.	100.00
0-80	1074.27	N.A.	100.00
0-90	1074.27	N.A.	100.00
10-90	398.62	N.A.	37.10
20-40	73.94	N.A.	6.90
20-50	76.60	N.A.	7.10
40-70	2.88	N.A.	0.30
60-80	0.00	N.A.	0.00
70-80	0.00	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1074.27	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	675.64
10-20	321.81
20-30	62.93
30-40	11.01
40-50	2.66
50-60	0.22
60-70	0.00
70-80	0.00
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : L051913402.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0	
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100
1	116	114	112	111	114	112	111	109	108	107	106	104	104	103	101	100	100	98	98
2	113	110	108	106	111	108	106	104	105	104	102	103	101	100	100	99	98	97	97
3	110	107	104	101	109	105	103	101	103	101	99	101	99	98	99	97	96	95	95
4	108	104	101	98	107	103	100	98	101	99	97	99	97	96	98	96	95	94	94
5	106	101	98	96	105	101	98	95	99	96	95	98	95	94	96	95	93	92	92
6	104	99	96	94	103	98	96	93	97	95	93	96	94	92	95	93	92	91	91
7	102	97	94	92	101	97	94	92	96	93	91	95	92	91	94	92	90	90	90
8	100	95	92	90	100	95	92	90	94	92	90	93	91	89	93	91	89	88	88
9	99	94	91	89	98	93	91	89	93	90	88	92	90	88	92	89	88	87	87
10	97	92	89	87	97	92	89	87	92	89	87	91	89	87	90	88	87	86	86

POLAR GRAPH

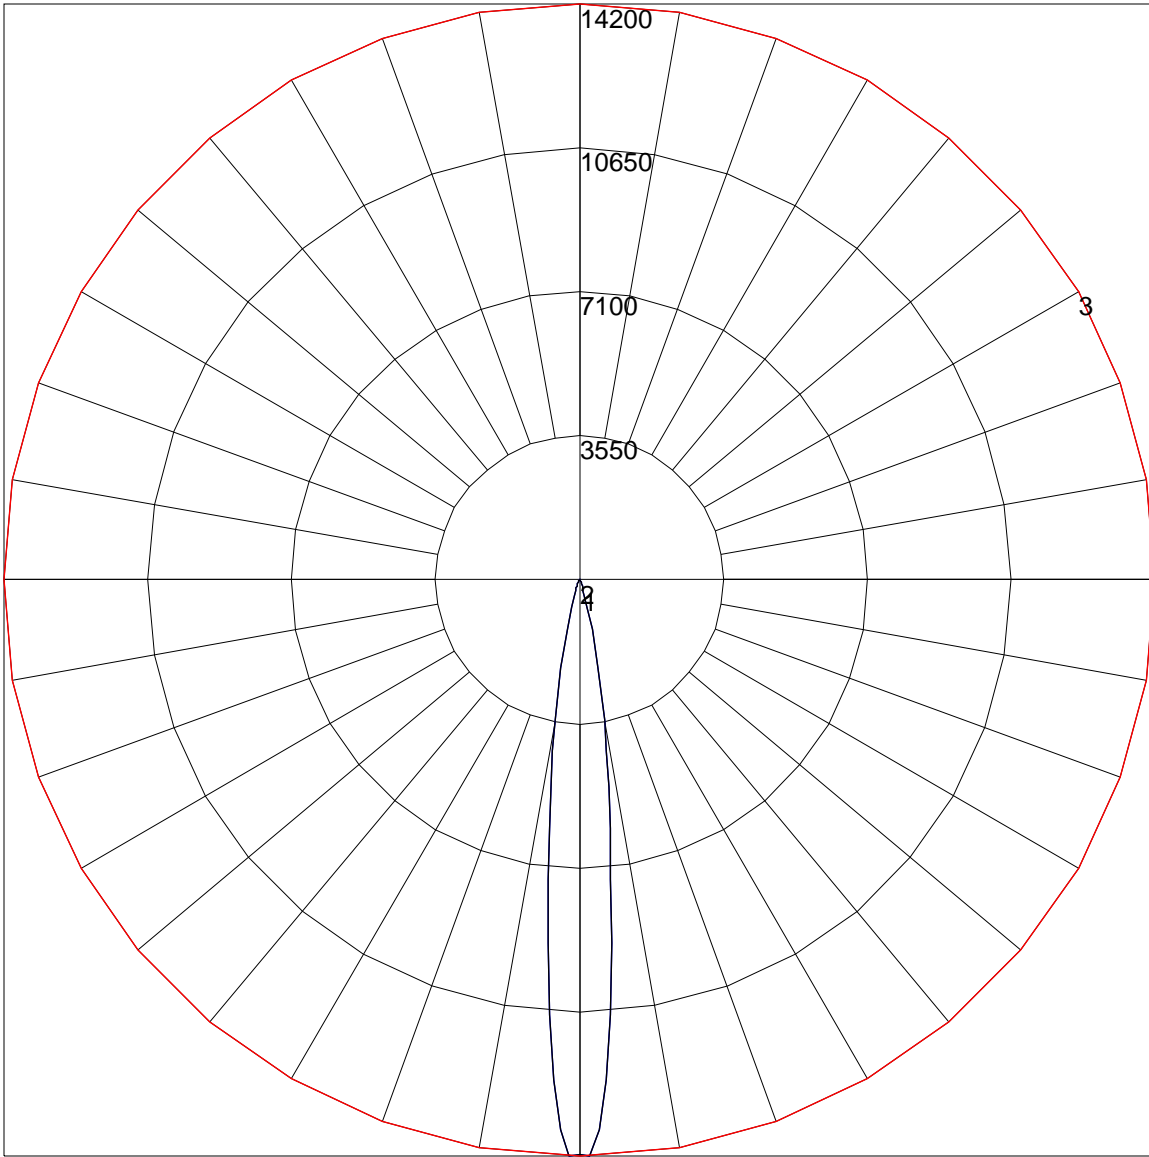

Maximum Candela = 14200 Located At Horizontal Angle = 0, Vertical Angle = 1
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)
3 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

ILLUMINANCE CONE DIAGRAM: BEAM (50%)
MOUNT HEIGHT(Ft): 12

Illuminance at a Distance			
	Center Beam fc	Beam Width	
2.0ft	3,539 fc	0.4 ft	0.4 ft
4.0ft	885 fc	0.9 ft	0.9 ft
6.0ft	393 fc	1.3 ft	1.3 ft
8.0ft	221 fc	1.8 ft	1.8 ft
10.0ft	142 fc	2.2 ft	2.2 ft
12.0ft	98.3 fc	2.7 ft	2.7 ft

■ Vert. Spread: 12.7°
■ Horiz. Spread: 12.8°