


200 Series – Recessed LED

200 SERIES – MOUNTING OPTIONS

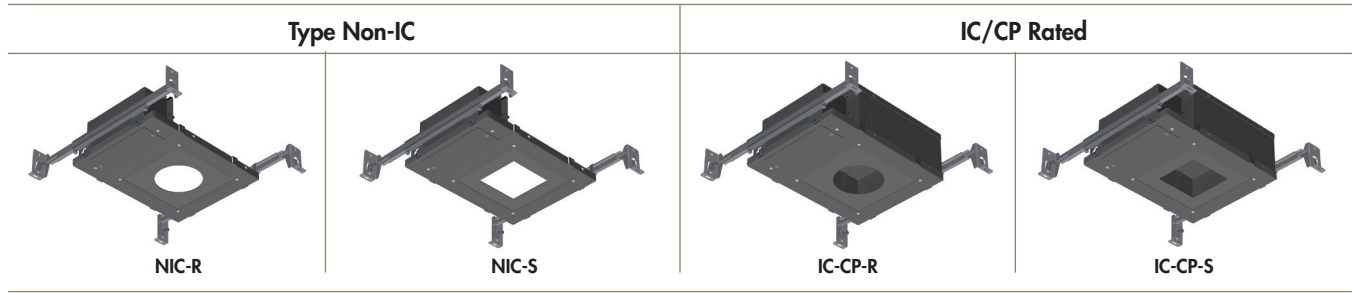

200 SERIES – LIGHT ENGINE + TRIM OPTIONS

201 LED FIXED POSITION



201-R
FLR-2-BV Trim



201-S
FLS-2-BV Trim



201-R
FLR-2 Trim



201-S
FLS-2 Trim

- Fixed position for general lighting applications
- Delivers up to 1265 lumens at 14 watts
- Four White LED options: 2700K, 3000K, 3500K, and 4000K 92+ CRI
- Two Warm Dim LED options: 3000-1800K 97+ CRI and 2800-2200K 95+ CRI
- Four interchangeable beam spreads: 15°, 25°, 40°, and 60°
- Five interchangeable beam enhancing lenses
- Nine Dimming Driver Options: 5% 0-10v, 5% Triac/ELV, 1% Triac/ELV, 1% 0-10v, 1% EldoLED 0-10v, EldoLED 1% DALI, 1% Lutron Triac, 1% Lutron EcoSystem, and 0.1% Lutron EcoSystem
- Four 4-1/4" flanged or flangeless trim options: 2-1/4" aperture Round and Square BEVEL and 1-7/8" aperture Round and Square FLAT
- Two trim finish options: White and Oil-Rubbed Bronze
- 2019 CA JA8 Compliant

202 LED ADJUSTABLE



202-R
FLR-2-BV Trim



202-S
FLS-2-BV Trim



202-R
FLR-2 Trim



202-S
FLS-2 Trim

- 0-30° adjustable for accent and general lighting applications
- Delivers up to 1232 lumens at 14 watts
- Four White LED options: 2700K, 3000K, 3500K, and 4000K 92+ CRI
- Two Warm Dim LED options: 3000-1800K 97+ CRI and 2800-2200K 95+ CRI
- Four interchangeable beam spreads: 15°, 25°, 40°, and 60°
- Five interchangeable beam enhancing lenses
- Nine Dimming Driver Options: 5% Triac/ELV (standard), 5% 0-10v, 1% Triac/ELV, 1% 0-10v, 1% EldoLED 0-10v, EldoLED 1% DALI, 1% Lutron Triac, 1% Lutron EcoSystem, and 0.1% Lutron EcoSystem
- Four 4-1/4" flanged or flangeless trim options: 2-1/4" aperture Round and Square BEVEL and 1-7/8" aperture Round and Square FLAT
- Two trim finish options: White and Oil-Rubbed Bronze
- 2019 CA JA8 Compliant

203 LED WALL WASH



203-R
FLR-2-WW Trim



203-S
FLS-2-WW Trim

- Fixed position for wall wash lighting applications
- Delivers up to 1059 lumens at 14 watts
- Four White LED options: 2700K, 3000K, 3500K, and 4000K 92+ CRI
- Two Warm Dim LED options: 3000-1800K 97+ CRI and 2800-2200K 95+ CRI
- Nine Dimming Driver Options: 5% 0-10v, 5% Triac/ELV, 1% Triac/ELV, 1% 0-10v, 1% EldoLED 0-10v, EldoLED 1% DALI, 1% Lutron Triac, 1% Lutron EcoSystem, and 0.1% Lutron EcoSystem
- Two 4-1/4" flanged or flangeless trim options: 2-3/4" angle-cut aperture Round and Square WALL WASH
- Two trim finish options: White and Oil-Rubbed Bronze
- 2019 CA JA8 Compliant



526 Portal Street
Cotati, CA 94931
USA

P 707.794.0888
F 707.795.4379

www.8lighting.com

All No. 8 Lighting fixtures and components are UL/CSA listed. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2020 No. 8 Lighting



02/2020