


804S – Low-Profile Recessed LED



804S – RECESSED LED HOUSING

- 4" overall height
- Accepts all **800 Series** trims
- IC / Airtight / Chicago Plenum rated
- Tested and rated for direct contact with closed-cell spray-foam insulation
- Twelve Dimming Driver Options: 0.1% Triac/ELV (standard), 1% Triac/ELV, 1% 0-10v, 1% EldoLED 0-10v, 1% EldoLED DALI, 0.1% EldoLED DALI 2-Channel, 0.1% EldoLED 0-10v 2-Channel, 0.1% EldoLED DMX 4-Channel, 1% Lutron Triac, 1% Lutron Ecosystem, 0.1% Lutron Ecosystem, and 1% Lutron T-Series 2-Channel

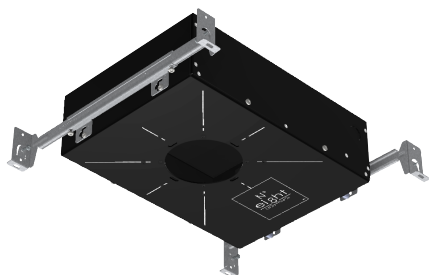

J2S – LED ADJUSTABLE

- Fully adjustable (0-45° vertical / 360° horizontal) for general, accent, and wall wash* lighting applications (*with optional WW-8 wall wash accessory)
- 3000K 92+ CRI White LED with three output options: delivers up to 803, 1023, or 1117 lumens using 9.5 to 20.5 watts
- 4500-2200K 92+ CRI Tunable White LED delivers up to 1133 lumens at 14.6 watts
- 3000-1800K 97+ CRI and 2800-2200K 95+ CRI Warm Dim LED options deliver up to 881 lumens at 14.3 watts
- 2019 CA JA8 Compliant
- Four beam spread options: 10°, 15°, 25°, and 40°
- Five interchangeable beam enhancing lenses
- Three interchangeable color filtering lenses



K2S – LED FIXED POSITION

- Fixed position down light for general lighting applications
- 3000K 92+ CRI White LED with three output options: delivers up to 821, 1087, or 1144 lumens using 9.3 to 20.3 watts
- 3000-1800K 97+ CRI and 2800-2200K 95+ CRI Warm Dim LED options deliver up to 905 lumens at 14.5 watts
- 2019 CA JA8 Compliant
- Four beam spread options: 10°, 15°, 25°, and 40°
- Five interchangeable beam enhancing lenses
- Three interchangeable color filtering lenses



M2S – LED MIRROR REFLECTOR

- Fully adjustable (45-90° vertical) for general and accent lighting applications on sloped ceilings
- 3000K 92+ CRI White LED with two output options: 712 and 944 lumens delivered at 15.0 and 20.7 watts
- 3000-1800K 97+ CRI and 2800-2200K 95+ CRI Warm Dim LED options deliver up to 569 lumens at 14.8 watts
- Four beam spread options: 10°, 15°, 25°, and 40°
- Five interchangeable beam enhancing lenses
- Three interchangeable color filtering lenses



526 Portal Street
Cotati, CA 94931
USA

P 707.794.0888
F 707.795-4379

www.8lighting.com

All No. 8 Lighting fixtures and components are UL/CSA listed. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2020 No. 8 Lighting



09/2020