

200-HD Series – Recessed LED


NEW CONSTRUCTION – HOSPITALITY, DESIGN, and COMMERCIAL APPLICATIONS

FEATURES


- Fully adjustable (0-30° vertical/360° horizontal) for general, accent, and wall wash lighting applications
- Delivers up to 2240 lumens and 85 LPW at 26 watts
- Four 94 CRI White LED options: 2700K, 3000K, 3500K, and 4000K
- Two 97 CRI Warm Dim LED options: 3000-1800K and 2800-2200K
- Four beam spread options: 15°, 25°, 40°, and 60°
- Five beam enhancing lens options
- Nine dimming driver options
- Six trim options – Round or Square, Flanged or Flangeless: 1-7/8" aperture FLAT, 2-1/4" aperture BEVEL, and 2-3/4" angle-cut aperture WALL WASH
- Four trim finish options: White, Oil-Rubbed Bronze, Satin Aluminum, and Satin Aluminum with White Flange
- Two mounting options: Type Non-IC and Type Non-IC/Airtight/Chicago Plenum Rated



Type Non-IC
(Round or Square)

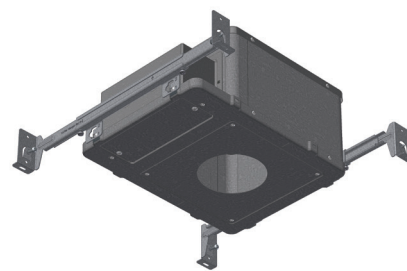

Type Non-IC/Airtight/Chicago
Plenum Rated
(Round or Square)



200-HD-S – ADJUSTABLE LED




200-HD-R – ADJUSTABLE LED

200-HD-S and 200-HD-R PERFORMANCE SUMMARY

Trim:	FLS-2-BV	FLR-2-BV	FLS-2-WW	FLR-2-WW	FLS-2	FLR-2
Delivered Lumens:	2163	2170	1737	1707	1695	1609
Delivered Lumens Per Watt:	82	82	67	65	65	63


Performance based on 3500K 94 CRI LED with 40° or 60° optic. Performance varies for each CCT and beam spread.




WHITE



OIL-RUBBED BRONZE



SATIN ALUMINUM



SATIN ALUMINUM w/WHITE FLANGE



526 Portal Street
Cotati, CA 94931
USA

P 707.794.0888
F 707.795-4379

www.8lighting.com

All No. 8 Lighting fixtures and components are UL/CSA listed. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2022 No. 8 Lighting



03/2022

93003-01