TRIM: FR-LG-W - SEAMLESS SERIES™/ROUND

4'' TRIM, 1.3/4'' APERTURE FOR WOOD/STONE CEILING APPLICATIONS

Project Name	
Date	Туре
Prepared By	
Comments	
Catalog # FR – LG – W – /	




All No. 8 Lighting 800 Series trims are UL/CSA listed and CE Certified. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2022 No. 8 Lighting Doc # 91314-13.0





PRODUCT FEATURES

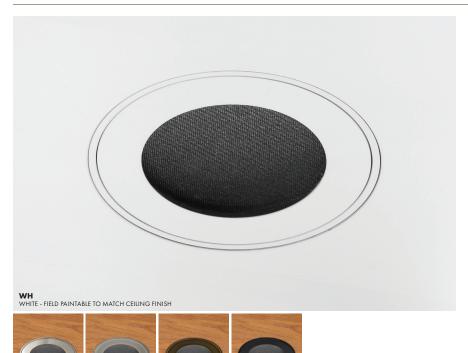


Trim Assembly

- FR-LG-W trim designed for flush installation into wood/stone ceilings.
- 4" trim plate with minimal 2 ³/₄" aperture installs flush with the finished ceiling. Includes Solite soft focus lens standard. Also available without lens.
- Field adjustable to accommodate ceiling thicknesses between ¹/2" - 1 ¹/2".
- Die-cast from Zinc alloy for maximum strength, stability, and corrosion resistance.
- Unique magnetic trim plate is removable without marring finishes.
- Can be installed before or after ceiling installation.
- Works with all Number Eight 800 Series housings.
- Available factory installed trim lens options are UL WET LISTED and IP54 Rated for use in DRY, DAMP, or WET locations (covered ceiling applications only). Approved for use in residential steam applications. Not for use in commercial steam applications.
- Available in many designer finishes including: WH White (Field paintable to match ceiling), PN Polished
 Nickel, SN Satin Nickel, OB Oil-Rubbed Bronze,
 and BK Black. Note: Lot variations in specialty finishes
 may occur. Ordering ALL trim kits at the same time is
 recommended.


Warranty

All No. 8 Lighting products are covered by a 5 year limited warranty. Products installed in residential steam applications are covered by a 2 year limited warranty. For specific warranty details and limitations, see 8lighting.com/resources-downloads.

PRODUCT SPECIFIER/PRODUCT ORDER NUMBER

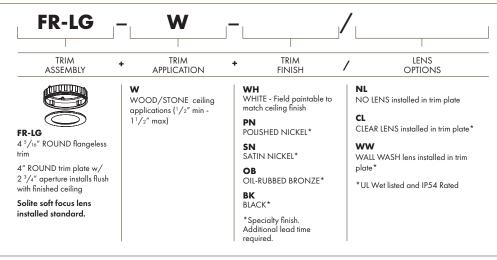

TRIM ASSEMBLY CROSS SECTION DETAIL

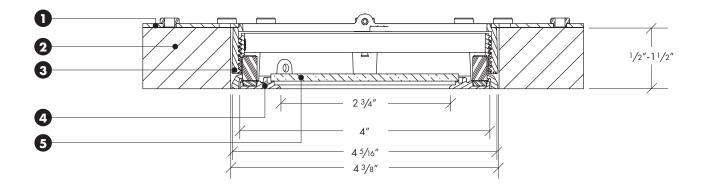

- 1) Housing
- 2) Wood/Stone Ceiling Material Accommodates all thickness from 1/2" to 1 1/2".
- 3) Flush Trim Kit 4 5/16" wide trim installs flush within 4 3/8" ceiling cut out. Height and rotation may be adjusted before or after ceiling installation.
- 4) Trim Plate Features unique magnetic attachments. Mounts flush to finished ceiling.
- 5) Lens Factory installed into trim plate. UL WET LISTED and IP54 Rated for use in DRY, DAMP, or WET locations (covered ceiling applications only). Approved for use in residential steam applications. Not for use in commercial steam applications.