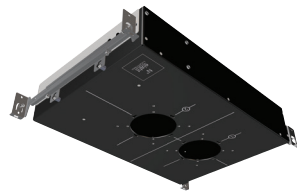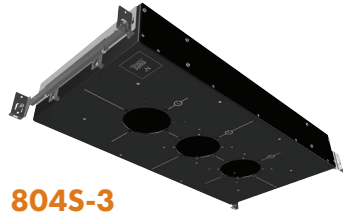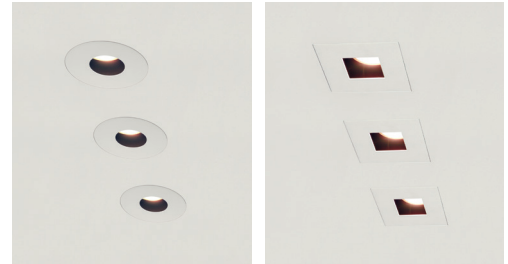# 804S – Low-Profile Multi-Lamp LED

FEATURES

- 4" overall height
- Available in 2, 3, and 4 lamp configurations
- IC / Airtight / Chicago Plenum rated
- Tested and rated for direct contact with closed-cell spray-foam insulation
- Accepts **J2S** 0-45° adjustable accent and wall wash or **K2S** fixed lamp modules
- Six LED options: **HI** or **HI-2** 2700K or 3000K 94 CRI Static White, and **WD** or **WD-2** 3000-1800K or 2800-2200K 97 CRI Warm Dim
- Four beam spread options: 10°, 15°, 25°, and 40°
- Five beam enhancing and three color filtering lens options
- Seven dimming driver options
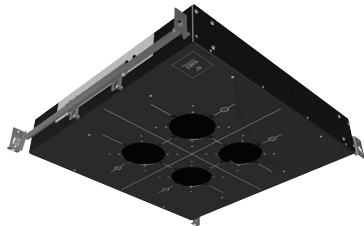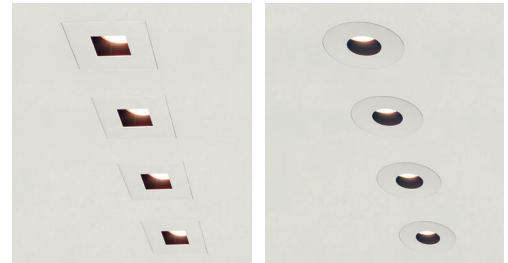- Accepts all **800 Series** trims
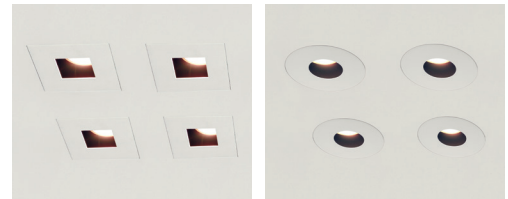- 2022 CA JA8 Compliant

804S-2

804S-3

804S-4

804S-4Q

804S-MULTI-LAMP PERFORMANCE SUMMARY

Model:	804S-2	804S-3	804S-4	804S-4Q
Delivered Lumens:	1846-2258	2769-3360	3692-4516	3692-4516
Wattage:	28-29	42-43.5	56-58	5658
Delivered Lumens Per Watt:	64-80	64-80	64-80	64-80
Color Rendering Index:	94-97	94-97	94-97	94-97

Performance summary for K2S Lamp Modules with FS/FLS/INS-LG/NL trims and HI, HI-2, and WD LED options at 3000K.

800 Series – Trim Packages

FEATURES

- Round and Square
- Flanged and Flangeless
- Minimal 1 -$3/4$" and 2 -$3/4$" apertures
- UL WET LISTED and IP54 Rated for use in DRY, DAMP, or WET locations (covered ceiling applications only)
- Approved for use in residential steam applications. Not for use in commercial steam applications.
- Compatible with all Number Eight Lighting **800 Series** housings
- Available in five designer finishes:
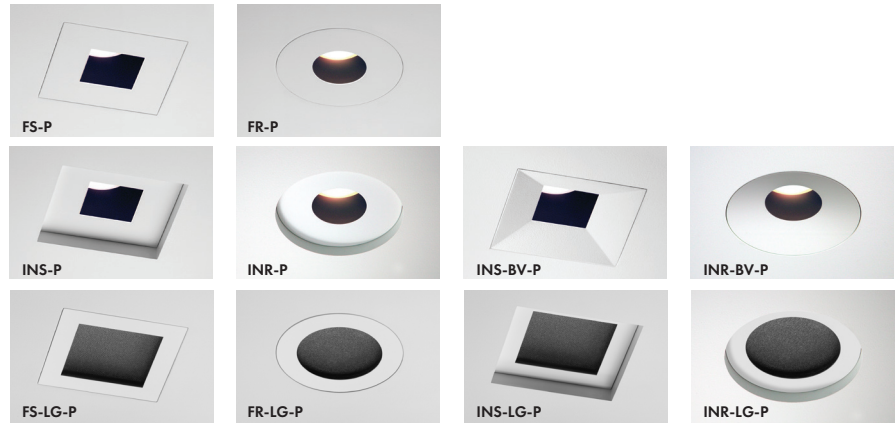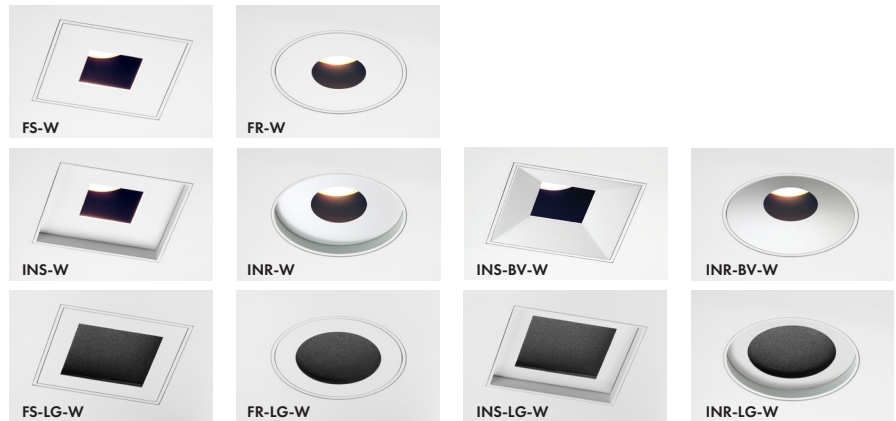
WHITE

POLISHED NICKEL

SATIN NICKEL

OIL-RUBBED BRONZE

BLACK

P-Series – Plaster/Sheetrock Ceiling Applications

FS-P

FR-P

INS-P

INR-P

INS-BV-P

INR-BV-P

FS-LG-P

FR-LG-P

INS-LG-P

INR-LG-P

W-Series – Flush - Wood/Stone Ceiling Applications

FS-W

FR-W

INS-W

INR-W

INS-BV-W

INR-BV-W

FS-LG-W

FR-LG-W

INS-LG-W

INR-LG-W

FL-W-Series – Wood/Stone/Acoustic Tile Ceiling Applications

FLS-W

FLR-W

FLINS-W

FLINR-W

FLINS-BV-W

FLINR-BV-W

FLS-LG-W

FLR-LG-W

FLINS-LG-W

FLINR-LG-W

UL CERTIFIED

MADE in the USA

09/2023

93203-05