


# 804S – Low-Profile Recessed LED

## FEATURES

- 4" overall height
- IC / Airtight / Chicago Plenum Rated
- Tested and rated for direct contact with closed-cell spray-foam insulation
- Accepts **J2S** 0-45° adjustable accent and wall wash, **K2S** fixed position, or **M2S** 35-90° adjustable mirror reflector lamp modules
- Nine LED options: **HI** or **HI-2** 2700K or 3000K 94 CRI Static White, **HI-3** 2700K or 3000K 97 CRI High R9 Static White, **WD** 3000-1800K or **WD-2** 2800-2200K 97 CRI Warm Dim, and **TW** 4700-2200K 95 CRI Tunable White
- Four beam spread options: 10°, 15°, 25°, and 40°
- Five beam enhancing and three color filtering lens options
- Ten dimming driver options
- Accepts all **800 Series** trims
- 2022 CA JA8 Compliant

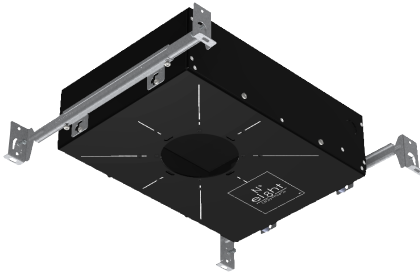

**804S** – RECESSED LED HOUSING



**J2S** – LED ADJUSTABLE



**K2S** – LED FIXED POSITION



**M2S** – LED MIRROR REFLECTOR

## 804S-SINGLE LAMP PERFORMANCE SUMMARY

LED:	HI	HI-2	HI-3	WD	WD-2	TW
Color Rendering Index:	94	94	97	97	97	95
R9:	60	63	97	82	77	79
Delivered Lumens:	1041-1472	1044-1129	949	837-923	834-915	1018
Wattage:	14/20	14.5	14.7	14.5	14.5	14
Delivered Lumens Per Watt:	74-80	72-78	64	58-64	58-63	73

Performance summary for J2S and K2S Lamp Modules with FS/FLS/INS-LG/NL trim.  
 HI, HI-2, and HI-3 LED data shown for 3000K. HI-3 LED option available with J2S Lamp Module only.  
 WD and WD-2 Warm Dimming LED data shown for 3000K and 2800K.  
 TW Tunable White LED data shown for 3000K. TW LED option available with J2S Lamp Module only.



526 Portal Street  
 Cotati, CA 94931  
 USA  
 P 707.794.0888  
 www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.


© 2024 No. 8 Lighting



# 800 Series – Trim Packages

## FEATURES

- Round and Square
- Flanged and Flangeless
- Minimal 1 -3/4" and 2 -3/4" apertures
- UL WET LISTED and IP54 Rated for use in DRY, DAMP, or WET locations (covered ceiling applications only)
- Approved for use in residential steam applications. Not for use in commercial steam applications.
- Compatible with all Number Eight Lighting **800 Series** housings
- Available in five designer finishes:



WHITE



POLISHED NICKEL



SATIN NICKEL




OIL-RUBBED BRONZE




BLACK

## P-Series – Plaster/Sheetrock Ceiling Applications

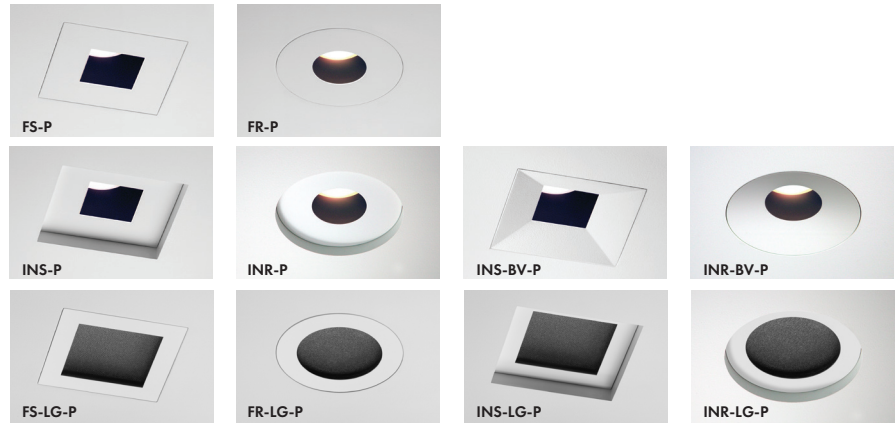

## W-Series – Flush - Wood/Stone Ceiling Applications

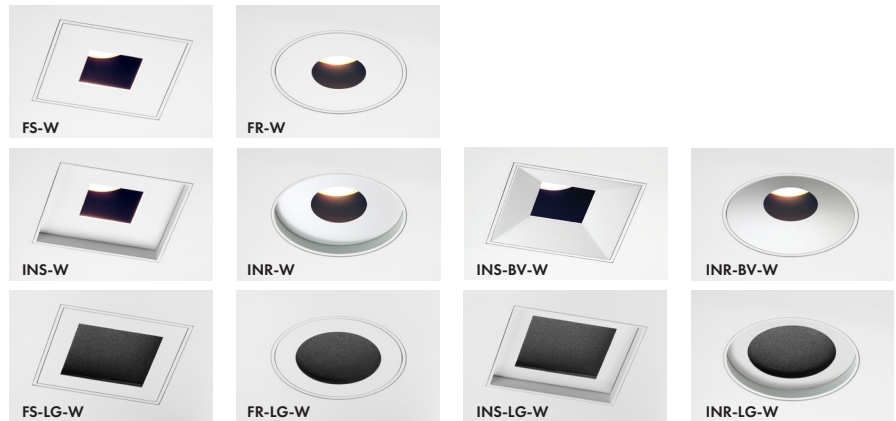

## FL-W-Series – Wood/Stone/Acoustic Tile Ceiling Applications



526 Portal Street  
Cotati, CA 94931  
USA  
P 707.794.0888  
www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2024 No. 8 Lighting

