

400 NEW CONSTRUCTION ADJUSTABLE LED
FLS-4 and **FLR-4** FLAT TRIMS for FLANGELESS WOOD/STONE
FRM2-4W-S/R and **FRM2-4W-S/R-CP** HOUSINGS

Project Name	
Date	Type
Prepared By	
Comments	
Catalog # 400 - - - / - / - - / -	



526 Portal Street
 Cotati, CA 94931
 USA
 P 707.794.0888
 www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2025 No. 8 Lighting
 Doc # 91269-13.2



PRODUCT FEATURES








400 w/ FLANGELESS TRIM for WOOD/STONE CEILINGS - SPECIFICATION SUMMARY

	Static White		Warm Dimming		
LED Option	HI	HI-2	WD	WD-2	WD-4
Delivered Lumens	1037	1082	818	809	864
System Wattage	14	14.5	15	15	15
Efficacy	74	75	56	55	59
CRI	94	94	97	97	97
R9	60	63	82	78	76
CCT Options	2700K, 3000K		3000-1800K	2800-2200K	3000-2200K
Optic Options	15, 25, 40	10	15, 25, 40		
Color Consistency	2-Step		3-Step		
Optical Accessories	Narrow, Medium, Wide, Extra Wide, Linear Spread, and 2400K, 2700K, 3500K Color Filters				
Adjustability	0-35° Tilt, 360° Rotation, Lockable				
Driver Options	<1% Forward/Reverse Phase (120v), 0.1/1% 0-10v (120-277v), 0.1/1% DALI (120-277v), 0.1/1% EcoSystem (120 or 277v)				
Trim Options	Round/Square Flat				
Finish Options	White, Oil-Rubbed Bronze				
Trim Mounting Options	Flangeless: Wood/Stone Ceiling Applications				
Trim Accessories	UL Wet Listed Lens Options - Clear, Soft Focus, Wall Wash				
Housing Options	Remodel: Type IC Air-Tight				

Performance data shown with FLS-4 Trim.
 Static White data shown for 3000K.
 Warm Dimming data shown for 3000K and 2800K.
 See Performance Summaries for additional information.

PRODUCT SPECIFIER/PRODUCT ORDER NUMBER

400					
HOUSING + LIGHT ENGINE	LED OPTIONS	OPTIC OPTIONS	OPTICAL ACCESSORIES (Optional)	DRIVER OPTIONS	OUTPUT
 <p>400 Light Engine for NEW CONSTRUCTION applications. AIR-TIGHT and IC Rated. Adjustable LED with 0-35° Tilt and 360° Rotation.</p>	<p>HI-27 2700K White LED</p> <p>HI 3000K White LED</p> <p>HI-2-27* 2700K White LED</p> <p>HI-2* 3000K White LED</p> <p>WD 3000-1800K Warm Dim LED</p> <p>WD-2 2800-2200K Warm Dim LED</p> <p>WD-4 3000-2200K Warm Dim LED</p> <p>*For use with 10° optic only.</p>	<p>10* 10° Very Narrow Spot</p> <p>15 15° Narrow Spot</p> <p>25 25° Narrow Flood</p> <p>40 40° Flood</p> <p>*For use with HI-2 LED options only.</p>	<p>NSP Narrow Softening Lens</p> <p>NFL Medium Softening Lens</p> <p>FL Wide Softening Lens</p> <p>WFL Extra Wide Softening Lens</p> <p>LS Linear Spread Softening Lens</p> <p>CF24* 2400K Color Filtering Lens</p> <p>CF27* 2700K Color Filtering Lens</p> <p>CF35* 3500K Color Filtering Lens</p> <p>*For use with HI and HI-2 3000K LED options only.</p>	<p>PR1-4 Premium Forward or Reverse-Phase <1% Dimming</p> <p>EL1-4 EldoLED 0-10v 1% Dimming</p> <p>EL1-01-4 EldoLED 0-10v 0.1% Dimming</p> <p>EL2-4 EldoLED DALI 1% Dimming</p> <p>EL2-01-4 EldoLED 0.1% DALI Dimming</p> <p>LU2-4 Lutron Hi-Lume LDE1 EcoSystem 1% Dimming</p> <p>LU4-4 Lutron Hi-Lume PEQOE EcoSystem 0.1% Dimming</p>	<p>350 Standard output for WD, WD-2, or WD-4 LED Options</p> <p>1000 Standard output for HI, HI-27, HI-2, or HI-2-27 LED Options</p>

TRIM OPTIONS	TRIM FINISH	TRIM ACCESSORIES (Optional)	HOUSING OPTIONS	MOUNTING ACCESSORIES
 <p>FLS-4 SQUARE Flat Trim Plate with 2" Aperture</p>  <p>FLR-4 ROUND Flat Trim Plate with 2" Aperture</p>	 <p>WH WHITE</p>  <p>OB* OIL-RUBBED BRONZE*</p> <p>*Specialty finish.</p>	<p>CL4* CLEAR lens</p> <p>SF4* SOFT FOCUS lens</p> <p>WW-4* WALL WASH accessory</p> <p>*UL Wet listed.</p>	<p>FRM2-4W-S HOUSING for FLANGELESS MOUNTING SQUARE Flat Trim Plate in Wood/Stone ceilings</p> <p>FRM2-4W-R HOUSING for FLANGELESS MOUNTING ROUND Flat Trim Plate in Wood/Stone ceilings</p> <p>FRM2-4W-S-CP* CP Rated HOUSING for FLANGELESS MOUNTING SQUARE Flat Trim Plate in Wood/Stone ceilings</p> <p>FRM2-4W-R-CP* CP Rated HOUSING for FLANGELESS MOUNTING ROUND Flat Trim Plate in Wood/Stone ceilings</p> <p>*CCEA plenum rated for City of Chicago environmental air spaces and rated for direct contact with spray-foam insulation.</p>	<p>BH Bar Hangers for joist mounting</p> <p>BB Butterfly Brackets for c-channel or bar mounting</p> <p>TBC-BH T-Bar Mounting Clips + Bar Hangers for T-Bar mounting</p> <p>PMB Panel Mounting Brackets (set of two) for direct mounting to wood panels</p>

Light Engine, LED, Optic Option, and Accessory Notes

400 Fully adjustable Airtight and IC-Rated light engine for NEW CONSTRUCTION applications features patented tool-free adjustment mechanism. Meets Washington State Airtight Standard WAC 51-11-0502 and in accordance with ASTM E283 to reduce energy loss. Accommodates a wide range of ceiling thicknesses without affecting aiming or adjustment. Use for adjustable accent, wall wash*, and general lighting applications. *For wall washing: specify 40° optic option with **HI**, **WD**, **WD-2** or **WD-4** LED, or 10° optic option and **FL** lens with **HI-2** LED. Requires **WW-4** wall wash accessory. To ensure fixture to fixture color consistency, use of the same LED option with adjacent fixtures is recommended. One field interchangeable optic option included standard. Up to two additional optical accessories can be accommodated.

Housing and Installation Notes

Housing options include power supply, junction box, and mounting accessories. Rated for direct contact with standard or spray-foam* thermal insulation with a max combined R-Value of R42 (may also be in-stalled in Non-IC applications). CCEA* plenum rated for City of Chicago environmental air spaces. *For spray-foam or CCEA applications, specify **FRM2-4W-S/R-CPRM2-4T-CP** housing. For installations in direct contact with thermal insulation, ambient temperatures in ceiling space should not exceed 25°C (77°F) during normal operation. For installations where insulation is held back a minimum of 3" from sides and top, ambient temperatures in ceiling space should not exceed 40°C (104°F) during normal operation.

Driver and Output Option Notes

0-10v driver options are configured for linear control. DALI driver options are configured for logarithmic control. No.8 Lighting conducts extensive testing to establish compatibility with many dimmer types. For a complete list of compatible dimmers, see 8lighting.com/resources-downloads. Outputs vary depending on LED type, trim type, and optical accessories used. For photometric files in PDF and IES formats, see: 8lighting.com/400-series-photometry.

Trim Finish Notes

White trim finish is field paintable to match ceiling color. Lot variations may occur with specialty finishes. Ordering ALL trim kits at the same time is recommended to minimize finish variations.

Trim Accessory Notes


Trim lens accessories are factory installed into trim plates and are UL WET LISTED and rated for use in DRY, DAMP, or WET locations (covered ceiling applications only). Approved for use in residential steam applications. Not for use in commercial steam applications.

Warranty

All No. 8 Lighting products are covered by a 5 year limited warranty. Products installed in residential steam applications are covered by a 2 year limited warranty. For specific warranty details and limitations, see: 8lighting.com/resources-downloads.


JA8-2025 CA Title 24 Compliant.

400 + FRM2-4W-S / FRM2-4W-S-CP NEW CONSTRUCTION HOUSINGS with FLS-4 SQUARE FLAT TRIM FLANGELESS MOUNTED

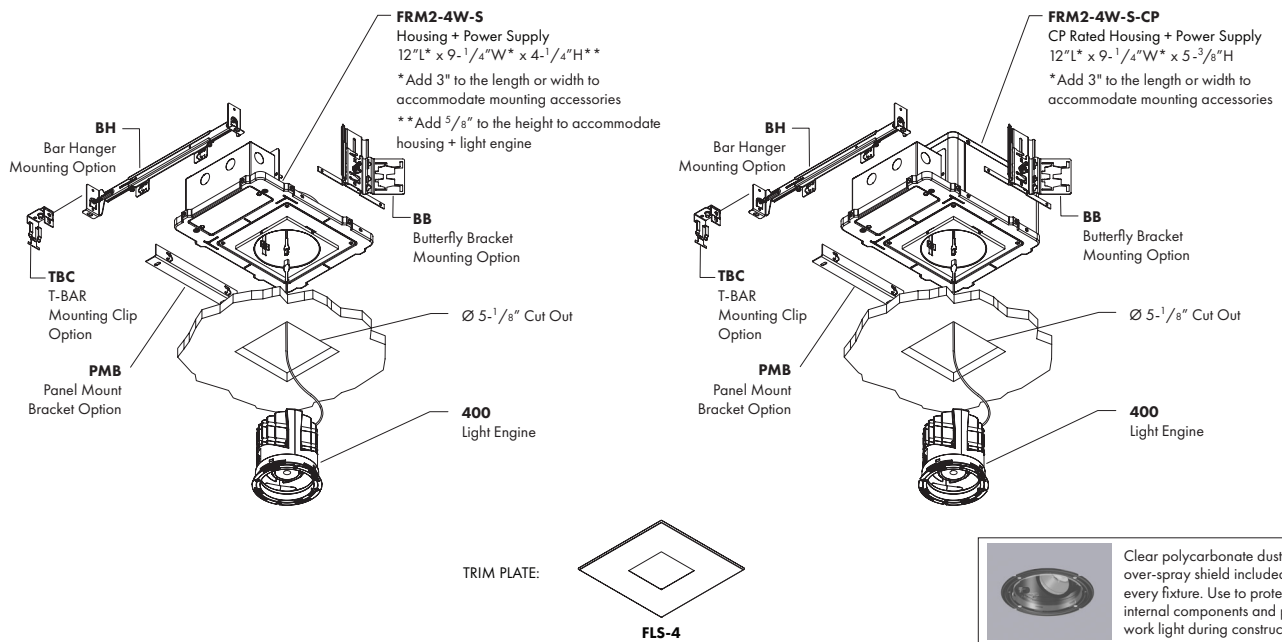


CEILING TYPES: Wood/Stone | **CEILING THICKNESS:** 1/2" Min to 2-1/4" Max | **CUT-OUT:** 5-1/8"

400 + FRM2-4W-S / FRM2-4W-S-CP NEW CONSTRUCTION HOUSINGS with FLS-4 SQUARE FLAT TRIM FLANGELESS MOUNTED

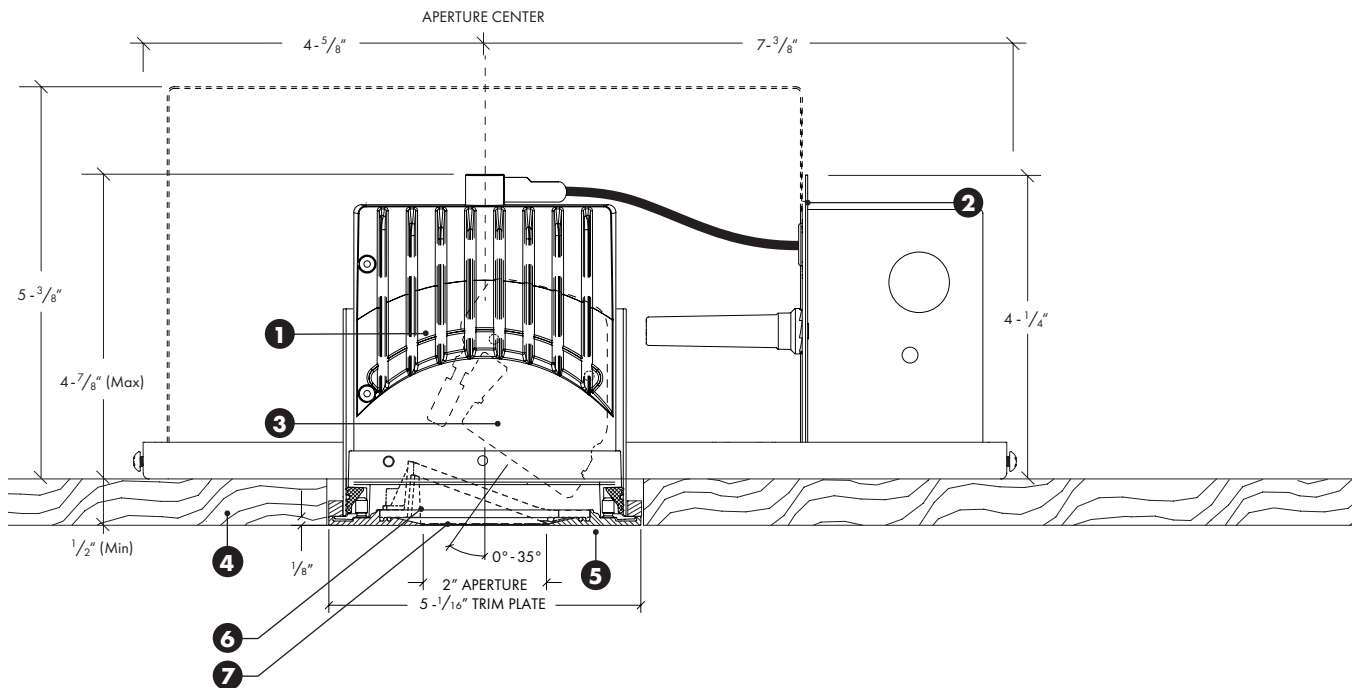


400 + FRM2-4W-R / FRM2-4W-R-CP NEW CONSTRUCTION HOUSINGS with FLR-4 ROUND FLAT TRIM FLANGELESS MOUNTED

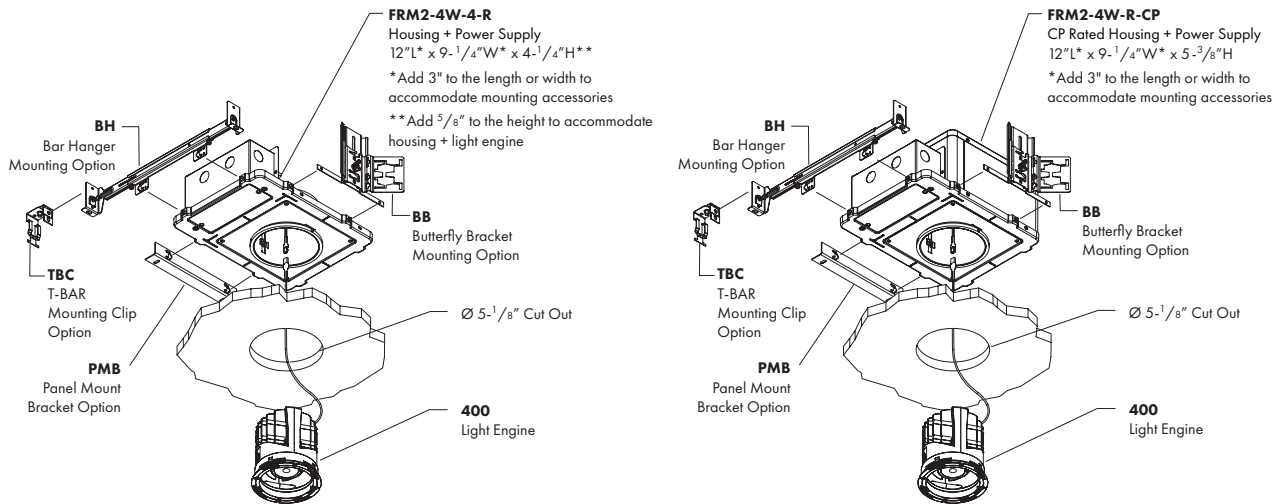

CEILING TYPES: Wood/Stone | CEILING THICKNESS: 1/2" Min to 2-1/4" Max | CUT-OUT: 5-1/8"

400 + FRM2-4W-R / FRM2-4W-R-CP NEW CONSTRUCTION HOUSINGS with FLR-4 ROUND FLAT TRIM FLANGELESS MOUNTED

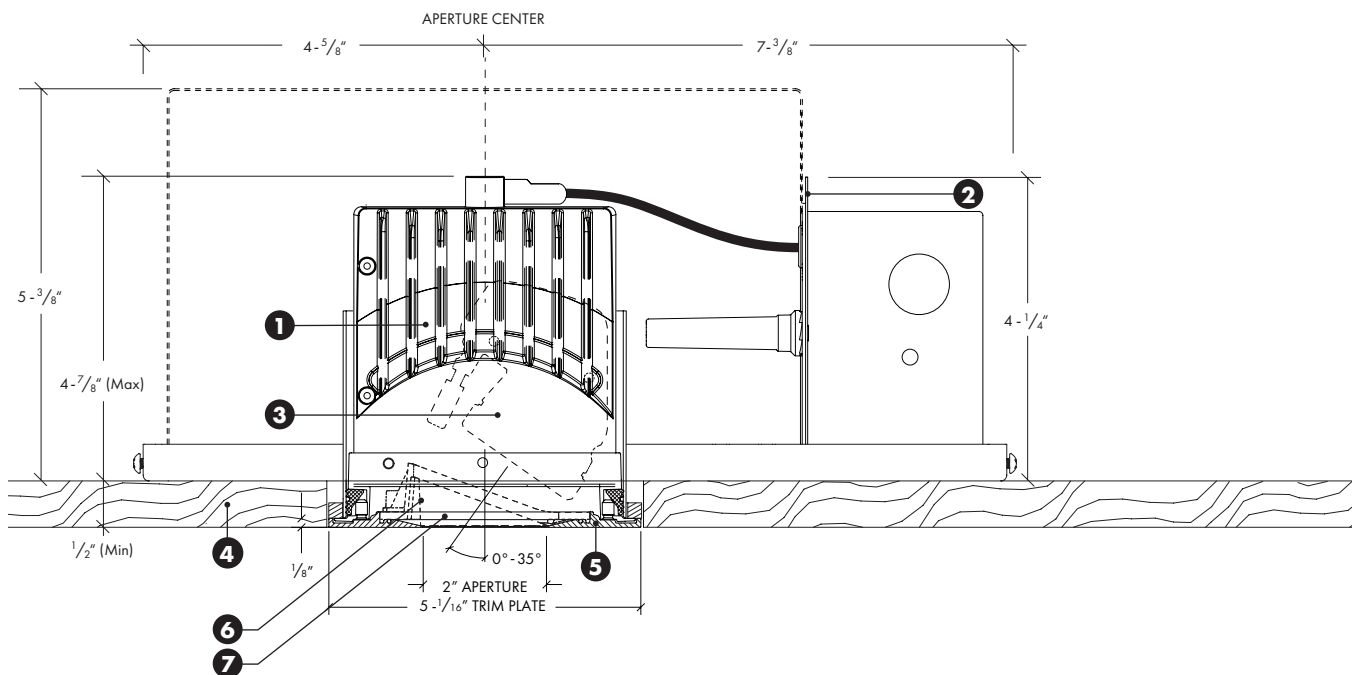

- 1) 400 NEW CONSTRUCTION Light Engine** Airtight and IC Rated.
- 2) FRM2-4W-R / FRM2-4W-R-CP** New Construction housing and power supply for FLANGELESS mounting **FLR-4** ROUND flat trim plate. For CCEA and spray foam ceiling applications, use **FRM2-4W-R-CP** frame (shown dashed).
- 3) Adjustable LED & Optics** Features 0° - 35° tilt and 360° rotation with tool-less locking.
- 4) Ceiling Material** (Wood/Stone) Accommodates ceiling thicknesses from 1/2" (min) to 2-1/4" (max) without affecting aiming or rotation.
- 5) FLR-4 ROUND Flat Trim Plate** features unique magnetic attachment. Mounts flush to finished ceiling.
- 6) WW-4 Wall Wash Accessory Lens** (optional) - Factory installed into trim plate. UL WET LISTED for use in DRY, DAMP, or WET locations (covered ceiling applications only). Approved for use in residential steam applications. Not for use in commercial steam applications.
- 7) CL4/SF4 Clear/Soft Focus Accessory Lens** (optional) - Factory installed into trim plate. UL WET LISTED for use in DRY, DAMP, or WET locations (covered ceiling applications only). Approved for use in residential steam applications. Not for use in commercial steam applications.

400 SERIES w/ FLS-4 TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	60	819-964	14	59-69
HI	1000	3000K	94	60	881-1037	14	63-74
HI-2-27	1000	2700K	94	63	1006	14.5	69
HI-2	1000	3000K	94	63	1082	14.5	75
WD	350	3000-1800K	97	82	694-818	15	48-56
WD-2	350	2800-2200K	97	78	686-809	15	47-55
WD-4	350	3000-2200K	97	76	732-864	15	50-59

Performance summary for HI LED with 15°, 25°, and 40° optic options and HI-2 LED with 10° optic option.
Performance summary for WD and WD-4 LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.

400 SERIES w/ FLR-4 TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	60	811-955	14	58-68
HI	1000	3000K	94	60	872-1027	14	62-73
HI-2-27	1000	2700K	94	63	1004	14.5	69
HI-2	1000	3000K	94	63	1080	14.5	74
WD	350	3000-1800K	97	81	708-840	15	48-58
WD-2	350	2800-2200K	97	78	700-835	15	48-57
WD-4	350	3000-2200K	97	76	721-855	15	49-58

Performance summary for HI LED with 15°, 25°, and 40° optic options and HI-2 LED with 10° optic option.
Performance summary for WD and WD-4 LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.

400 SERIES w/ FLS-4 TRIM + WW-4 WALL WASH ACCESSORY - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	60	652	14	47
HI	1000	3000K	94	60	701	14	50
HI-2-27	1000	2700K	94	64	504	14.5	35
HI-2	1000	3000K	94	64	542	14.5	37
WD	350	3000-1800K	97	82	548	15	38
WD-2	350	2800-2200K	97	80	543	15	37
WD-4	350	3000-2200K	97	78	580	15	40

Performance summary for HI LED with 40° optic option and HI-2 LED with 10° optic + FL lens option.
Performance summary for WD and WD-4 LED at 3000K and WD-2 LED at 2800K with 40° optic option.

400 SERIES w/ FLR-4 TRIM + WW-4 WALL WASH ACCESSORY - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	60	659	14	47
HI	1000	3000K	94	60	709	14	51
HI-2-27	1000	2700K	94	64	509	14.5	35
HI-2	1000	3000K	94	64	547	14.5	38
WD	350	3000-1800K	97	82	584	15	40
WD-2	350	2800-2200K	97	80	560	15	38
WD-4	350	3000-2200K	97	77	587	15	40


Performance summary for HI LED with 40° optic option and HI-2 LED with 10° optic + FL lens option.
Performance summary for WD and WD-4 LED at 3000K and WD-2 LED at 2800K with 40° optic option.

400 SERIES - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	25°	41°	44°	14° x 26°
15° Narrow Spot	HI	21°	30°	48°	56°	21° x 35°
15° Narrow Spot	WD/WD-2/WD-4	24°	32°	49°	56°	24° x 46°
25° Narrow Flood	HI	28°	35°	51°	59°	29° x 47°
25° Narrow Flood	WD/WD-2/WD-4	29°	35°	51°	58°	31° x 44°
40° Flood	HI	41°	44°	59°	66°	42° x 53°
40° Flood	WD/WD-2/WD-4	37°	42°	55°	62°	39° x 50°


*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

400 SERIES w/ FLS-4 TRIM - CONE OF LIGHT DIAGRAMS

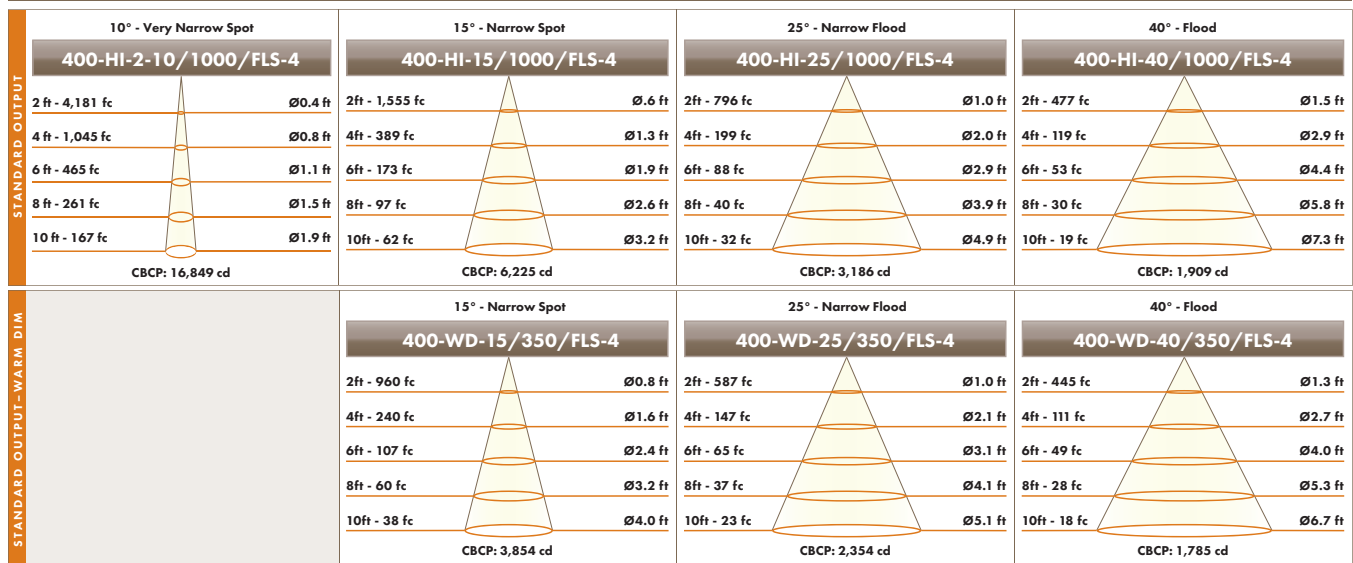





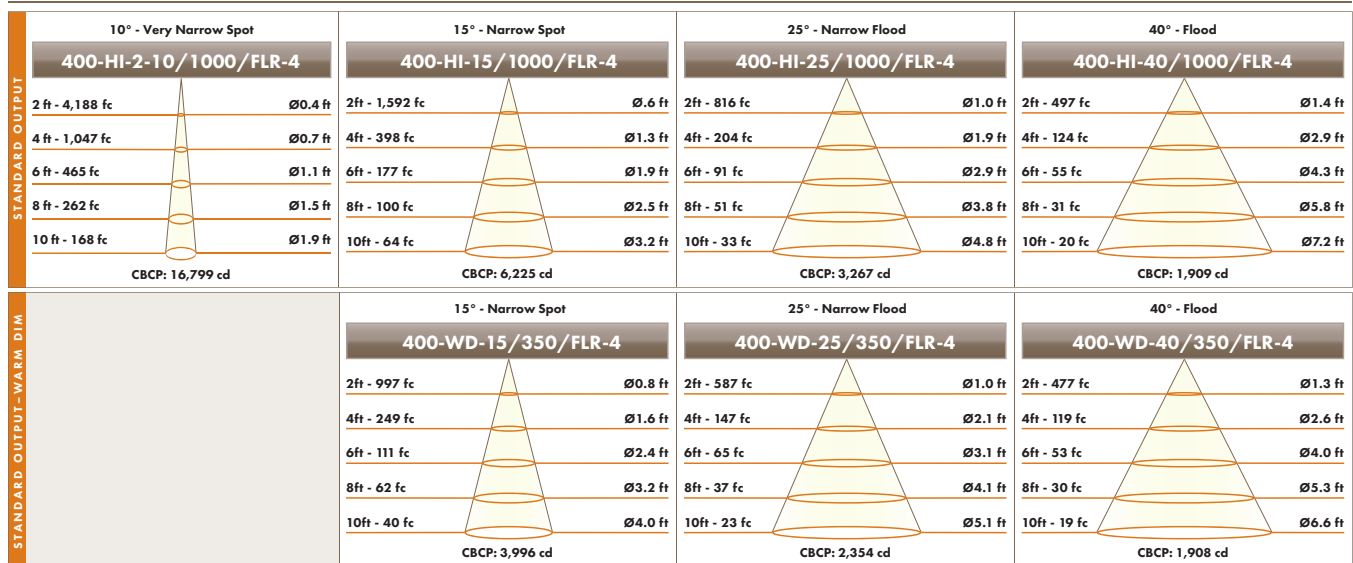




Performance shown for 3000K. Output varies by CCT.

400 SERIES w/ FLR-4 TRIM - CONE OF LIGHT DIAGRAMS












Performance shown for 3000K. Output varies by CCT.

400-HI-40 w/ FLS-4 TRIM + WW-4 WALL WASH ACCESSORY - FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.4	3.0	0.4	0.4	0.2	0.4	0.1	0.1	0.1	0.1	0.1
		1.5 ft	28.9	31.1	28.9	25.8	25.3	25.8	13.3	13.9	13.3	12.1	11.3
		2.5 ft	32.7	36.4	32.7	29.2	32.3	29.2	22.2	24.3	22.2	20.2	21.5
		3.5 ft	21.9	23.8	21.9	19.9	22.4	19.9	19.0	21.1	19.0	17.3	19.6
		4.5 ft	13.3	14.2	13.3	12.5	13.6	12.5	13.3	14.5	13.3	12.4	13.8
		5.5 ft	8.3	8.7	8.3	7.9	8.4	7.9	9.0	9.6	9.0	8.5	9.2
		6.5 ft	5.4	5.6	5.4	5.2	5.5	5.2	6.1	6.4	6.1	5.8	6.3
		7.5 ft	3.6	3.7	3.6	3.5	3.7	3.5	4.2	4.4	4.2	4.1	4.3
		8.5 ft	2.6	2.6	2.6	2.5	2.6	2.5	3.0	3.2	3.0	3.0	3.1
		9.5 ft	1.9	1.9	1.9	1.8	1.9	1.8	2.2	2.3	2.2	2.2	2.3










Note: With **HI** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

400-HI-2-10-FL w/ FLS-4 TRIM + WW-4 WALL WASH ACCESSORY - FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.4	0.4	0.4	0.4	0.3	0.4	0.1	0.1	0.1	0.1	0.1
		1.5 ft	18.3	19.3	18.3	16.7	14.9	16.7	7.5	7.6	7.5	7.0	5.9
		2.5 ft	23.7	26.3	23.7	21.2	22.8	21.2	15.4	17.0	15.4	14.1	14.6
		3.5 ft	16.7	18.2	16.7	15.1	16.7	15.1	14.0	15.5	14.0	12.8	14.1
		4.5 ft	10.5	11.2	10.5	9.8	10.6	9.8	10.2	11.1	10.2	9.5	10.4
		5.5 ft	6.7	7.0	6.7	6.3	6.7	6.3	7.0	7.5	7.0	6.6	7.2
		6.5 ft	4.3	4.5	4.3	4.2	4.4	4.2	4.9	5.1	4.9	4.6	4.9
		7.5 ft	3.0	3.0	3.0	2.9	3.0	2.9	3.4	3.6	3.4	3.3	3.5
		8.5 ft	2.1	2.1	2.1	2.0	2.1	2.0	2.5	2.5	2.5	2.4	2.5
		9.5 ft	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.9	1.8	1.8	1.8










Note: With **HI-2** LED option, use 10° optic + **FL** lens and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

400-WD-40 w/ FLS-4 TRIM + WW-4 WALL WASH ACCESSORY - FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.2	0.2	0.2	0.2	0.1	0.2	0.1	0.1	0.1	0.1	0.1
		1.5 ft	17.0	18.6	17.0	15.4	15.0	15.4	7.2	7.5	7.2	6.8	6.1
		2.5 ft	22.9	26.3	22.9	20.5	23.0	20.5	14.3	16.2	14.3	13.1	14.1
		3.5 ft	17.0	19.4	17.0	15.2	17.9	15.2	13.8	16.0	13.8	12.6	14.6
		4.5 ft	10.9	12.0	10.9	10.0	11.4	10.0	10.4	11.9	10.4	9.6	11.2
		5.5 ft	7.0	7.5	7.0	6.5	7.2	6.5	7.3	8.1	7.3	6.8	7.8
		6.5 ft	4.6	4.8	4.6	4.4	4.7	4.4	5.1	5.5	5.1	4.8	5.3
		7.5 ft	3.1	3.3	3.1	3.0	3.2	3.0	3.6	3.8	3.6	3.4	3.7
		8.5 ft	2.2	2.3	2.2	2.1	2.2	2.1	2.6	2.7	2.6	2.5	2.7
		9.5 ft	1.6	1.7	1.6	1.6	1.6	1.6	1.9	2.0	1.9	1.9	2.0










Note: With **WD**, **WD-2**, or **WD-4** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

400-HI-40 w/ FLR-4 TRIM + WW-4 WALL WASH ACCESSORY - FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.3	0.2	0.3	0.3	0.1	0.3	0.1	0.1	0.1	0.1	0.1
		1.5 ft	28.1	31.3	28.1	25.4	25.8	25.4	12.9	13.9	12.9	12.1	11.4
		2.5 ft	32.1	36.9	32.1	28.6	33.0	28.6	21.6	24.5	21.6	19.7	21.8
		3.5 ft	21.9	24.6	21.9	19.7	23.2	19.7	18.8	21.6	18.8	17.0	20.0
		4.5 ft	13.6	14.8	13.6	12.5	14.3	12.5	13.4	15.0	13.4	12.3	14.3
		5.5 ft	8.6	9.1	8.6	8.0	8.9	8.0	9.1	10.0	9.1	8.5	9.6
		6.5 ft	5.6	5.9	5.6	5.3	5.8	5.3	6.3	6.7	6.3	5.9	6.6
		7.5 ft	3.8	4.0	3.8	3.7	3.9	3.7	4.4	4.7	4.4	4.2	4.6
		8.5 ft	2.7	2.8	2.7	2.6	2.8	2.6	3.2	3.3	3.2	3.1	3.3
		9.5 ft	2.0	2.0	2.0	1.9	2.0	1.9	2.4	2.4	2.4	2.3	2.4










Note: With **HI** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

400-HI-2-10-FL w/ FLR-4 TRIM + WW-4 WALL WASH ACCESSORY - FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.5	0.4	0.5	0.5	0.3	0.5	0.2	0.2	0.2	0.2	0.2
		1.5 ft	19.5	21.2	19.5	17.6	16.9	17.6	8.4	8.7	8.4	7.8	7.1
		2.5 ft	23.8	26.9	23.8	21.2	23.7	21.2	15.7	17.6	15.7	14.3	15.6
		3.5 ft	16.7	18.4	16.7	15.2	17.1	15.2	14.1	15.8	14.1	12.9	14.6
		4.5 ft	10.6	11.3	10.6	9.8	10.8	9.8	10.2	11.2	10.2	9.5	10.7
		5.5 ft	6.7	7.1	6.7	6.4	6.8	6.4	7.1	7.6	7.1	6.7	7.3
		6.5 ft	4.4	4.6	4.4	4.2	4.5	4.2	4.9	5.2	4.9	4.7	5.0
		7.5 ft	3.0	3.1	3.0	2.9	3.0	2.9	3.5	3.6	3.5	3.3	3.5
		8.5 ft	2.1	2.2	2.1	2.1	2.1	2.1	2.5	2.6	2.5	2.4	2.5
		9.5 ft	1.5	1.6	1.5	1.5	1.6	1.5	1.8	1.9	1.8	1.8	1.9

Note: With **HI-2** LED option, use 10° optic + **FL** lens and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

400-WD-40 w/ FLR-4 TRIM + WW-4 WALL WASH ACCESSORY - FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.3	0.2	0.3	0.3	0.2	0.3	0.1	0.1	0.1	0.1	0.1
		1.5 ft	20.7	23.1	20.7	18.6	18.3	18.6	9.1	10.0	9.1	8.4	8.9
		2.5 ft	26.5	30.3	26.5	23.5	26.4	23.5	17.0	19.2	17.0	15.4	16.6
		3.5 ft	19.0	21.2	19.0	17.0	19.6	17.0	15.8	18.0	15.8	14.3	16.4
		4.5 ft	12.0	12.9	12.0	11.1	12.3	11.1	11.6	12.9	11.6	10.7	12.2
		5.5 ft	7.6	8.0	7.6	7.2	7.7	7.2	8.0	8.7	8.0	7.5	8.3
		6.5 ft	5.0	5.2	5.0	4.8	5.1	4.8	5.6	5.9	5.6	5.3	5.7
		7.5 ft	3.4	3.5	3.4	3.3	3.4	3.3	3.9	4.1	3.9	3.8	4.0
		8.5 ft	2.4	2.5	2.4	2.3	2.4	2.3	2.8	2.9	2.8	2.7	2.9
		9.5 ft	1.7	1.8	1.7	1.7	1.8	1.7	2.1	2.2	2.1	2.0	2.1

Note: With **WD**, **WD-2**, or **WD-2** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for 3000K CCT.