



200 Series – New Construction LED

FEATURES


- **Recessed New Construction**
Type Non-IC / Airtight
Type IC / Airtight / CP Rated
- **Light Engine Options**
0-30° Adjustable
Wall Wash
- **LED Options**
Static White
Warm Dimming
- **Optic Options**
15°, 25°, 40°, and 60°
- **Optical Accessories**
Five Beam Enhancing Lens Options
- **Driver Options**
Integral: Forward/Reverse Phase,
0-10V, DALI, EcoSystem
- **Trim Options**
Flat: 1-7/8" aperture
Bevel: 2-1/4" aperture
Wall Wash: 2-3/4" aperture
- **Trim Mounting Options**
Flanged (for multiple ceiling types)
Flangeless for Sheetrock
Flangeless for Wood
- **Three Trim Lens Options**
- **CA JA8 2025 Compliant**
- **Four Finish Options**

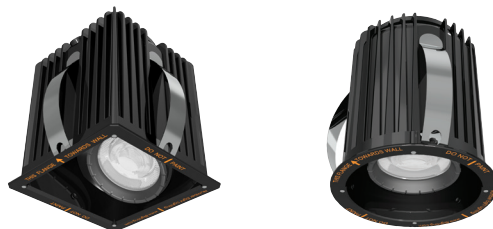

202/203 NEW CONSTRUCTION LIGHT ENGINES

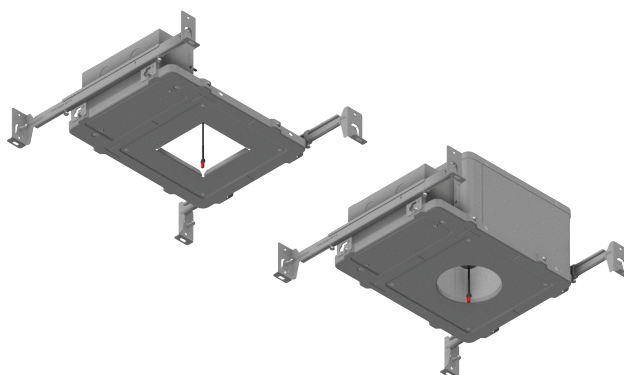

200 SERIES NEW CONSTRUCTION HOUSINGS for ROUND or SQUARE LIGHT ENGINES



WHITE



SATIN ALUMINUM



SATIN ALUMINUM w/ WHITE FLANGE



OIL-RUBBED BRONZE

200 SERIES PERFORMANCE SUMMARY

	Static White				Warm Dimming	
LED Options	HI-2700	HI-3000	HI-3500	HI-4000	WD	WD-2
Delivered Lumens	1094	1151	1197	1232	760	737
CRI	92+	92+	92+	92+	97+	95+
R9	61	57	61	58	81	74
Efficacy	76	80	83	86	50	48
CCT Options	2700K	3000K	3500K	4000K	3000K-1800K	2800K-2200K

Performance data shown for 202-S-BV with FLS-2-BV Trim.
Warm Dimming data shown for 3000K and 2800K.



526 Portal Street
Cotati, CA 94931
USA
P 707.794.0888
www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2025 No. 8 Lighting



04/2025

93001-07