

# 200-HD Series – New Construction LED


HOSPITALITY, DESIGN, and COMMERCIAL APPLICATIONS

## FEATURES



- **Recessed New Construction**  
Type Non-IC  
Type IC / Airtight / CP Rated
- **Light Engine**  
0-30° Adjustable for Accent, Wall Wash, and General Lighting Applications
- **LED Options**  
Static White  
Warm Dimming
- **Optic Options**  
15°, 25°, 40°, and 60°
- **Optical Accessories**  
Five Beam Enhancing Lens Options
- **Driver Options**  
Integral: Forward/Reverse Phase, 0-10V, DALI, EcoSystem
- **Trim Options**  
Flat: 1-7/8" aperture  
Bevel: 2-1/4" aperture  
Wall Wash: 2-3/4" aperture
- **Trim Mounting Options**  
Flanged (for multiple ceiling types)  
Flangeless for Sheetrock  
Flangeless for Wood
- **CA JA8 2025 Compliant**
- **Four Finish Options**




## 200-HD-S/200-HD-R NEW CONSTRUCTION LIGHT ENGINES

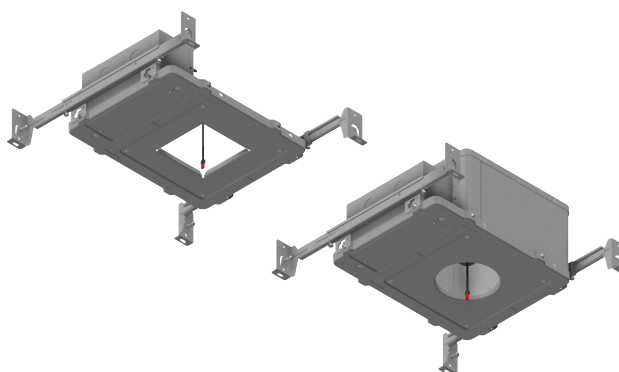

## 200 SERIES NEW CONSTRUCTION HOUSINGS for ROUND or SQUARE LIGHT ENGINES

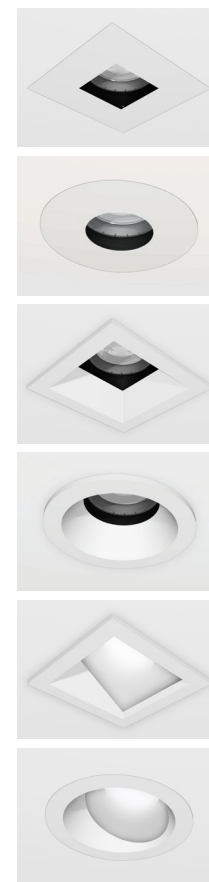

WHITE



SATIN ALUMINUM



SATIN ALUMINUM w/ WHITE FLANGE



OIL-RUBBED BRONZE

## 200-HD SERIES PERFORMANCE SUMMARY

	Static White				Warm Dimming	
LED Options	HI-2700	HI-3000	HI-3500	HI-4000	WD	WD-2
Delivered Lumens	1597/1942	1666/2026	1698/2065	1751/2130	747	738
CRI	94	94	94	94	97	97
R9	62	64	67	71	81	74
Efficacy	75/82	79/85	80/87	83/90	51	50
CCT Options	2700K	3000K	3500K	4000K	3000K-1800K	2800K-2200K

Performance data shown for 200-HD-S-BV with FLS-2-BV Trim.  
Warm Dimming data shown for 3000K and 2800K.



526 Portal Street  
Cotati, CA 94931  
USA  
P 707.794.0888  
www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2025 No. 8 Lighting



04/2025

93003-06