

## Photometric / Colorimetric / Electric Report

Fixture Model:

200-HD-IC-R-HI3500-15-EL1-2-500-FLR-2-BV-30d

Trim Model:

FLR-2-BV-WH

Date:

8/19/2022



Light efficiency:

61 Lumen/Watt

Light quality:

CRI: 94.8

Color temperature:

3477 K

CIE 1931:

x: 0.405  
y: 0.388


Output: 1183 lm

Peak: 7697 cd



Power: 19.5 W

PF: 0.98


Spectra:

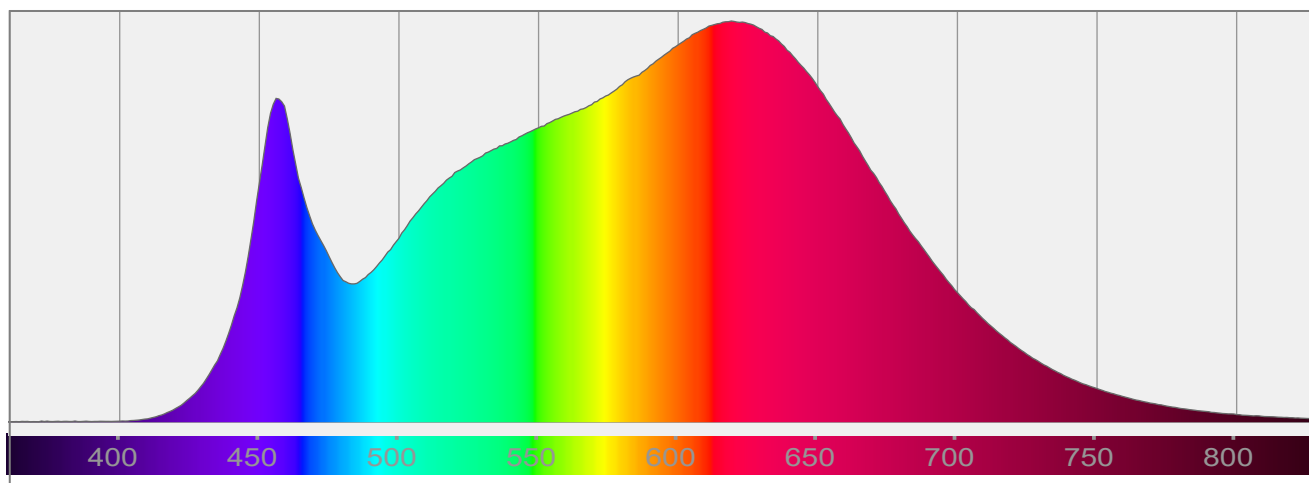


## Color Details

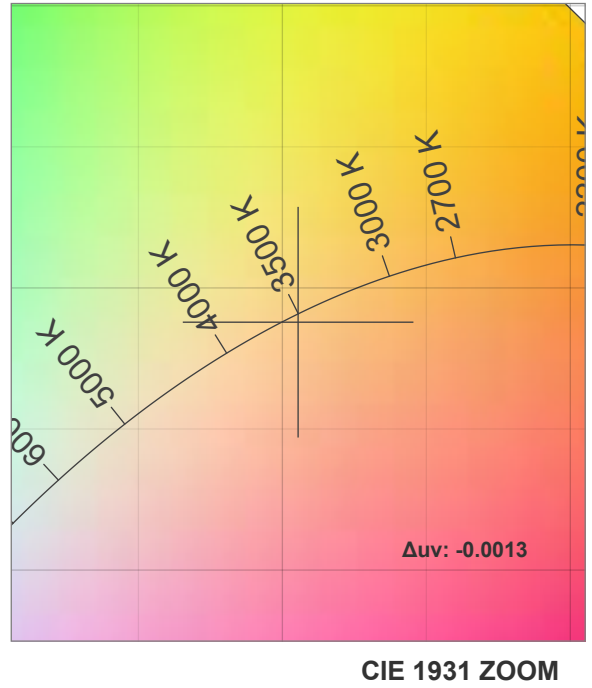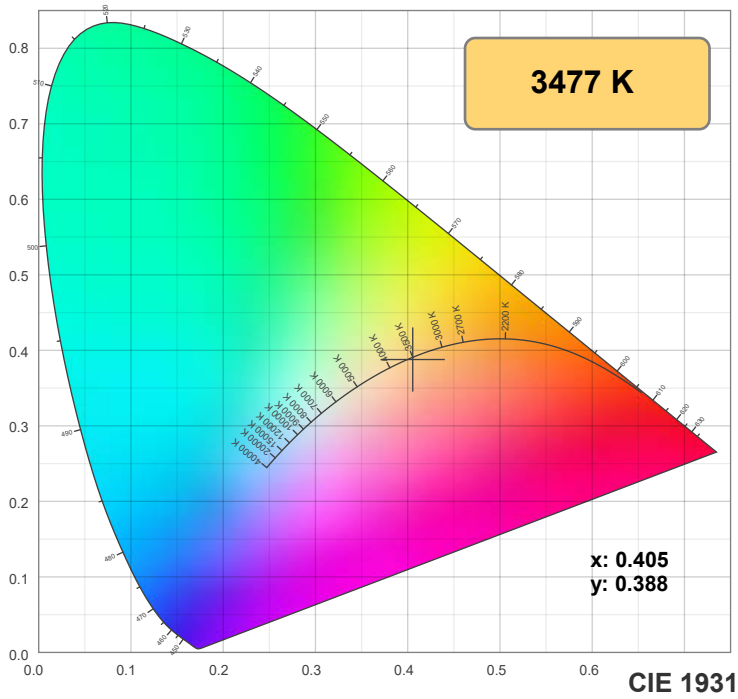

**TM-30: 91.2**

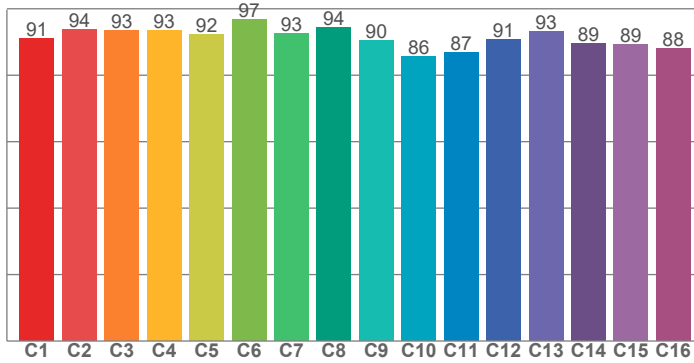

**CRI: 94.8 (R1-R8)**

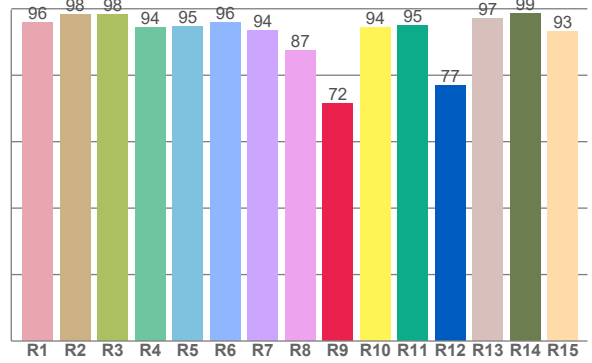

**CRI R Values:**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95.9	98.4	98.3	94.2	94.6	95.8	93.5	87.4	71.6	94.4	94.9	77.0	97.1	98.6	93.2


**TM30 C Values:**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91.1	93.8	93.4	93.4	92.3	96.7	92.5	94.2	90.4	85.6	86.7	90.8	93.2	89.4	89.1	88.1

**CQS Q values:**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91.1	97.6	89.6	87.5	90.7	93.4	95.1	95.4	99.2	96.4	95.4	95.1	95.2	91.6	91.7

**CQS: 92.9**

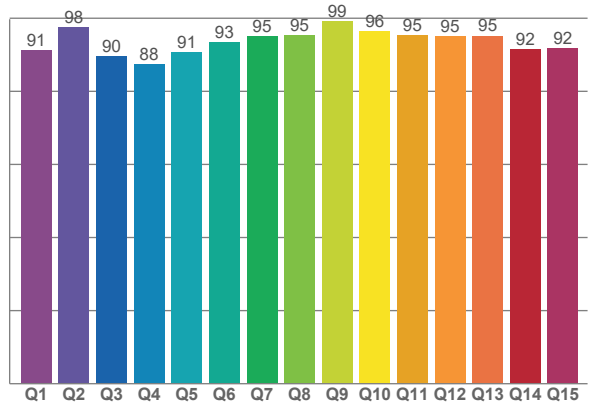

**Color Parameters:**

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3477 K	94.8	71.6	91.2	98.1	92.9	0.405	0.388	0.237	0.340	-0.0013

# TM-30 Details







**Rf 91.2**

Fidelity index Rf

**Rg 98.1**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	91	-4%	1%
2	94	-2%	2%
3	93	-1%	3%
4	93	-2%	0%
5	92	-5%	0%
6	97	-1%	0%
7	93	-4%	2%
8	94	-2%	3%
9	90	-2%	6%
10	86	0%	10%
11	87	4%	8%
12	91	5%	1%
13	93	2%	-4%
14	89	4%	-7%
15	89	-1%	-6%
16	88	-2%	-6%

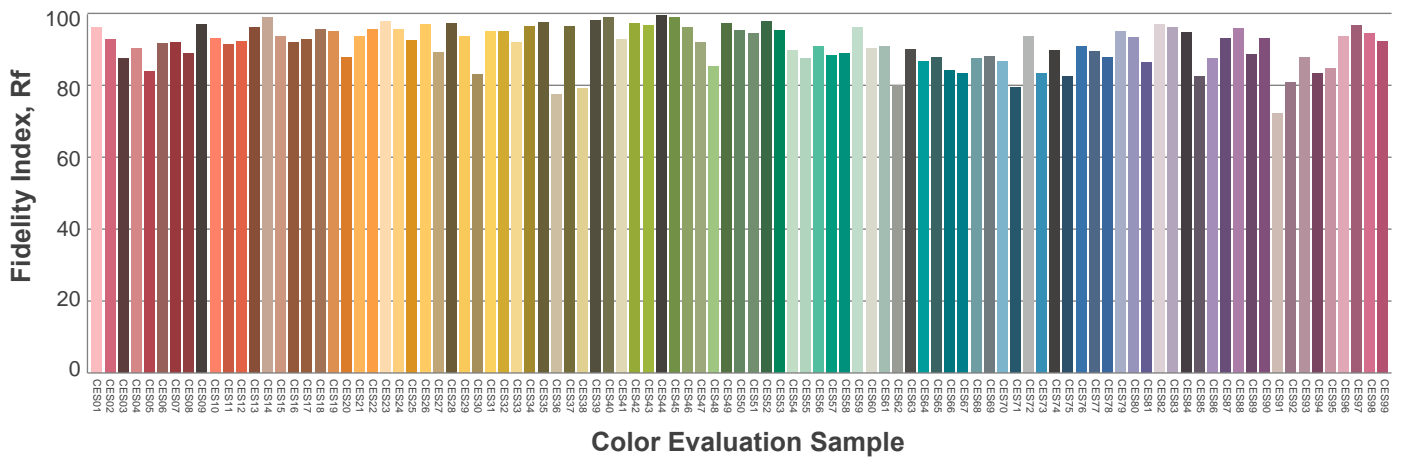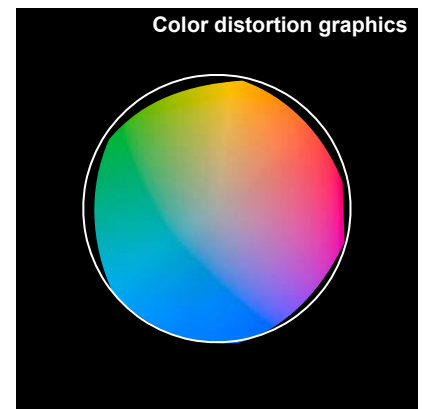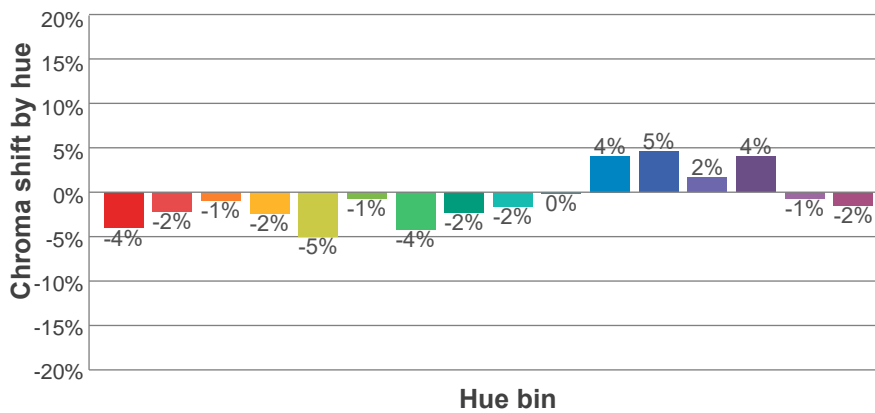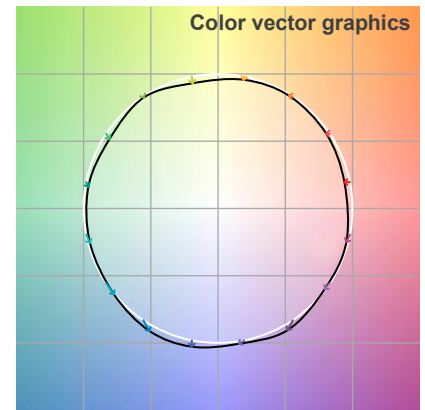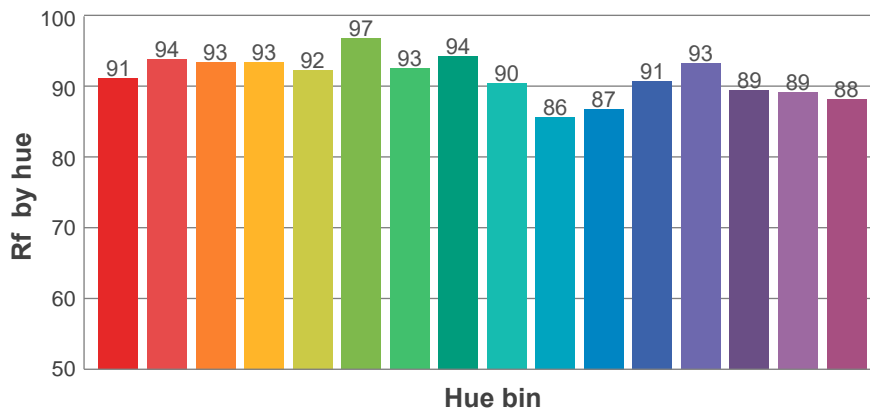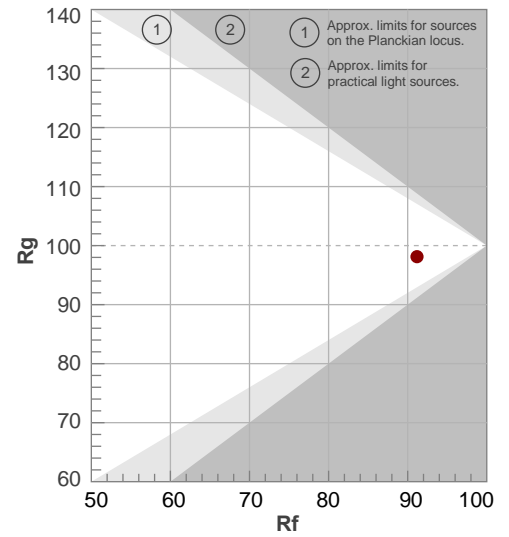

## Aiming Angle

