

## Photometric / Colorimetric / Electric Report

Fixture Model:

200-HD-IC-S-HI3500-60-EL1-2-500-FLS-2-BV

Trim Model:

FLS-2-BV-WH

Date:

8/10/2022



Light efficiency:

87 Lumen/Watt

Light quality:

CRI: 94.8

Color temperature:

3467 K

CIE 1931:

x: 0.406  
y: 0.388


Output: 1698 lm

Peak: 1689 cd



Power: 19.5 W

PF: 0.98


Spectra:

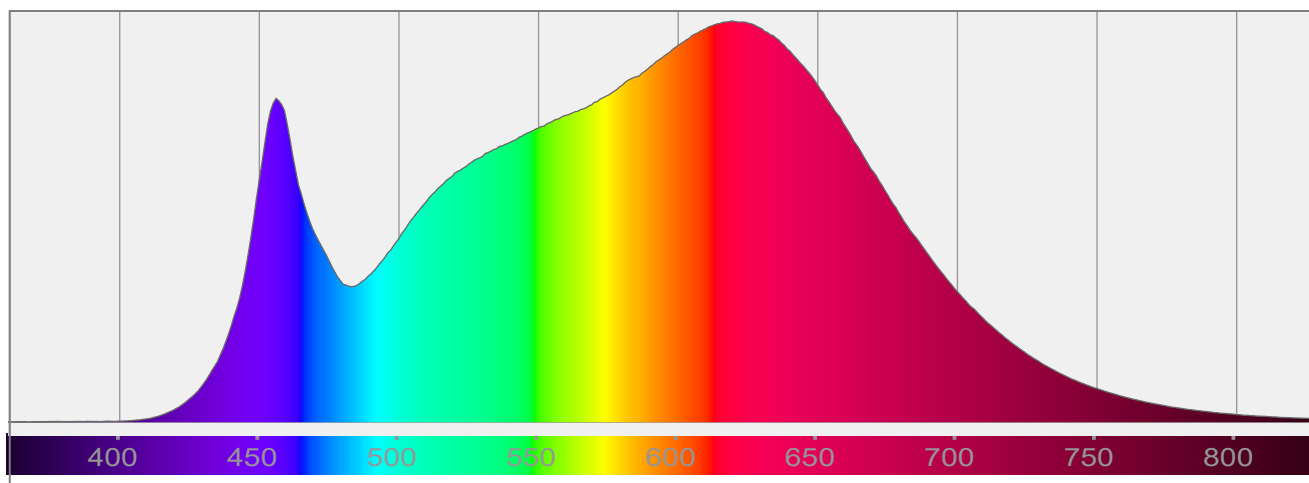


## Color Details

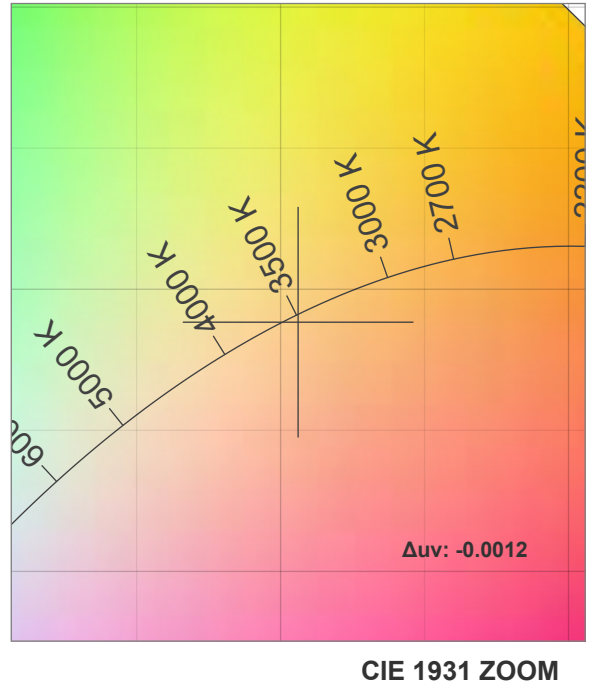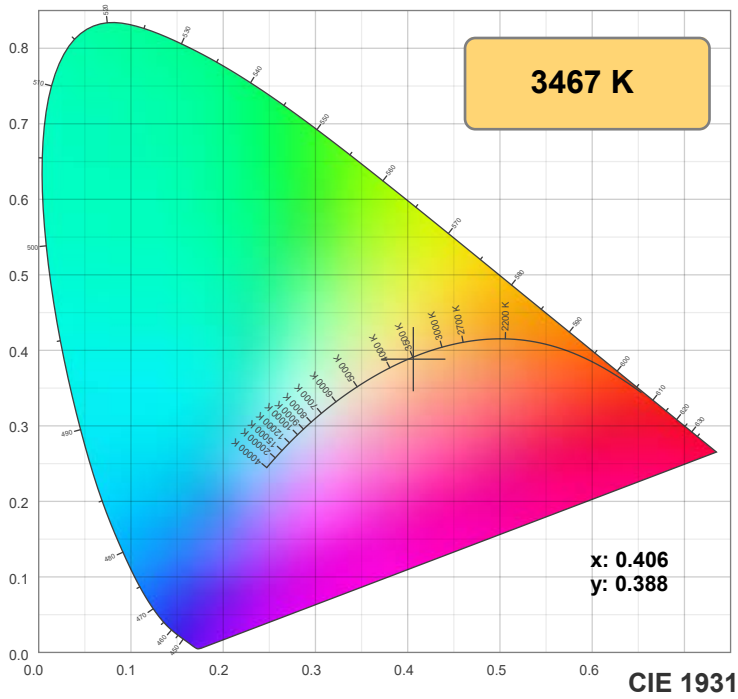

**TM-30: 91.3**

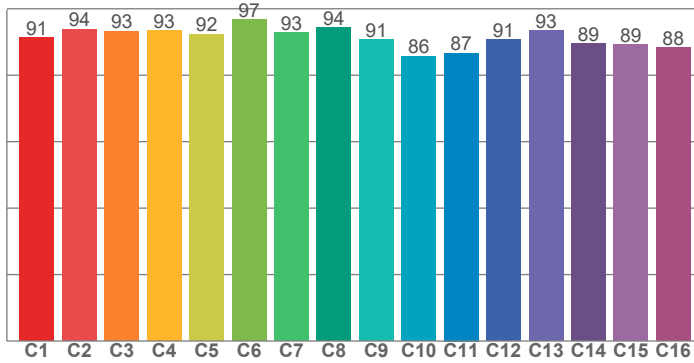

**CRI: 94.8 (R1-R8)**

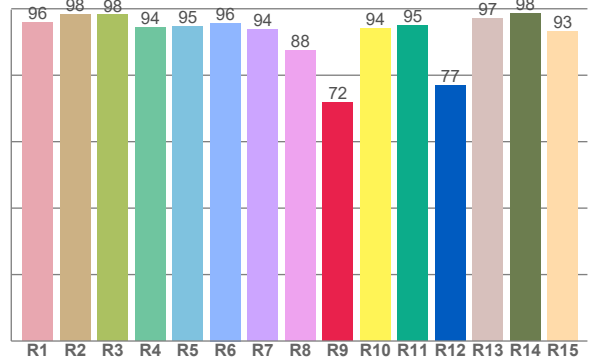

**CRI R Values:**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95.8	98.3	98.1	94.4	94.6	95.7	93.7	87.6	71.8	94.1	95.0	76.9	97.0	98.5	93.2


**TM30 C Values:**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91.2	93.9	93.3	93.5	92.4	96.8	92.8	94.5	90.6	85.7	86.7	90.7	93.4	89.5	89.3	88.3

**CQS Q values:**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91.3	97.6	89.4	87.5	90.9	93.5	94.9	95.3	99.1	96.2	95.3	95.1	95.2	91.6	91.7

**CQS: 92.9**

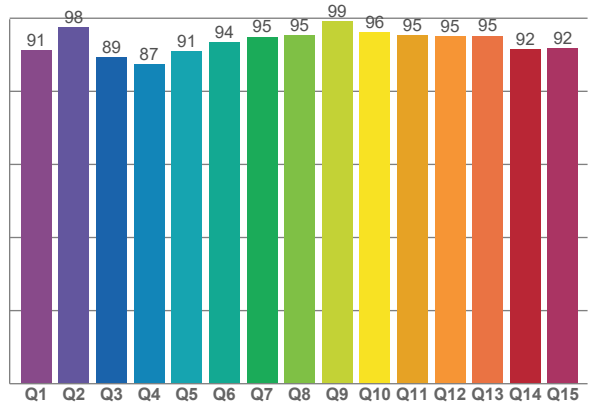

**Color Parameters:**

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3467 K	94.8	71.8	91.3	98.3	92.9	0.406	0.388	0.237	0.340	-0.0012

# TM-30 Details







**Rf 91.3**

Fidelity index Rf


**Rg 98.3**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	91	-4%	1%
2	94	-2%	2%
3	93	-1%	3%
4	93	-2%	0%
5	92	-5%	0%
6	97	-1%	0%
7	93	-4%	2%
8	94	-2%	3%
9	91	-2%	6%
10	86	0%	10%
11	87	4%	8%
12	91	5%	1%
13	93	2%	-4%
14	89	4%	-7%
15	89	-1%	-6%
16	88	-1%	-6%

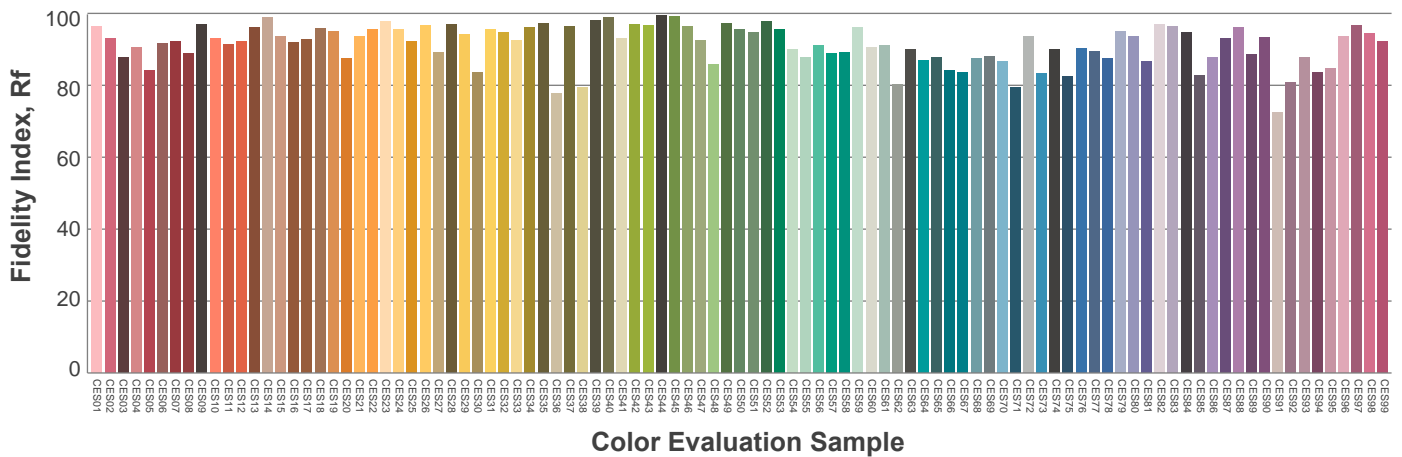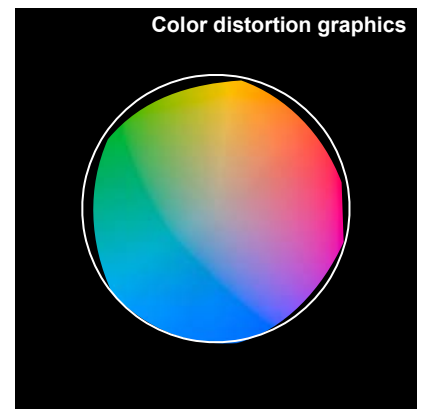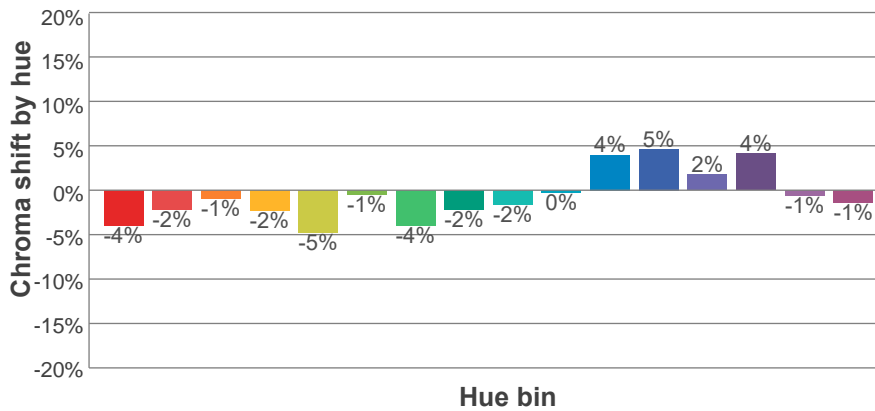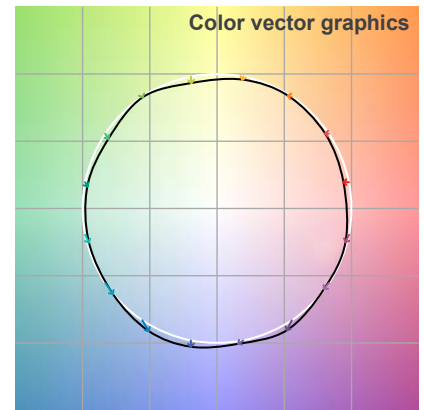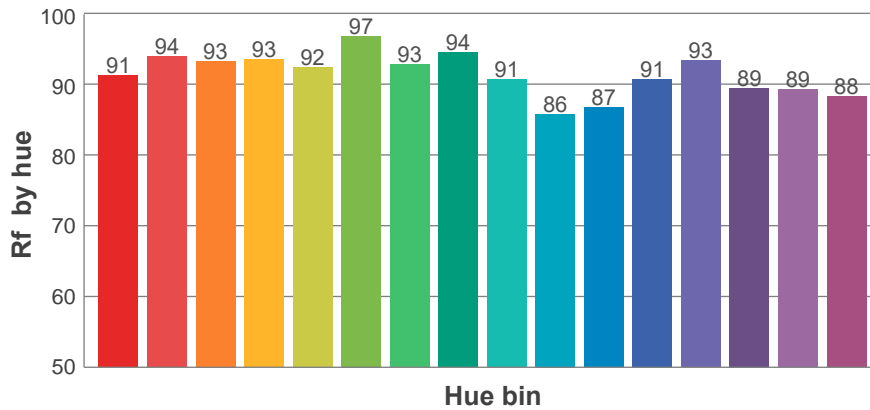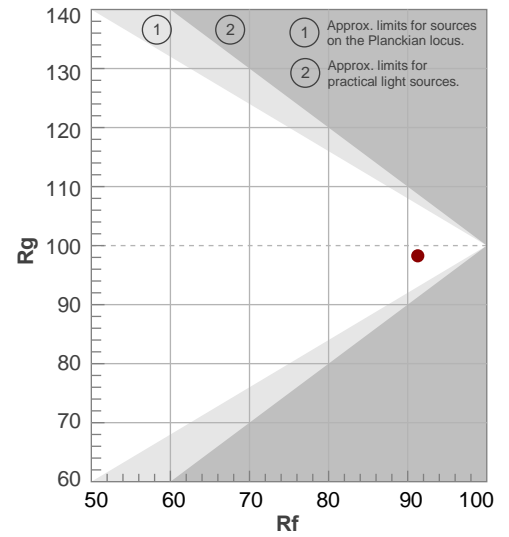

## Beam Details

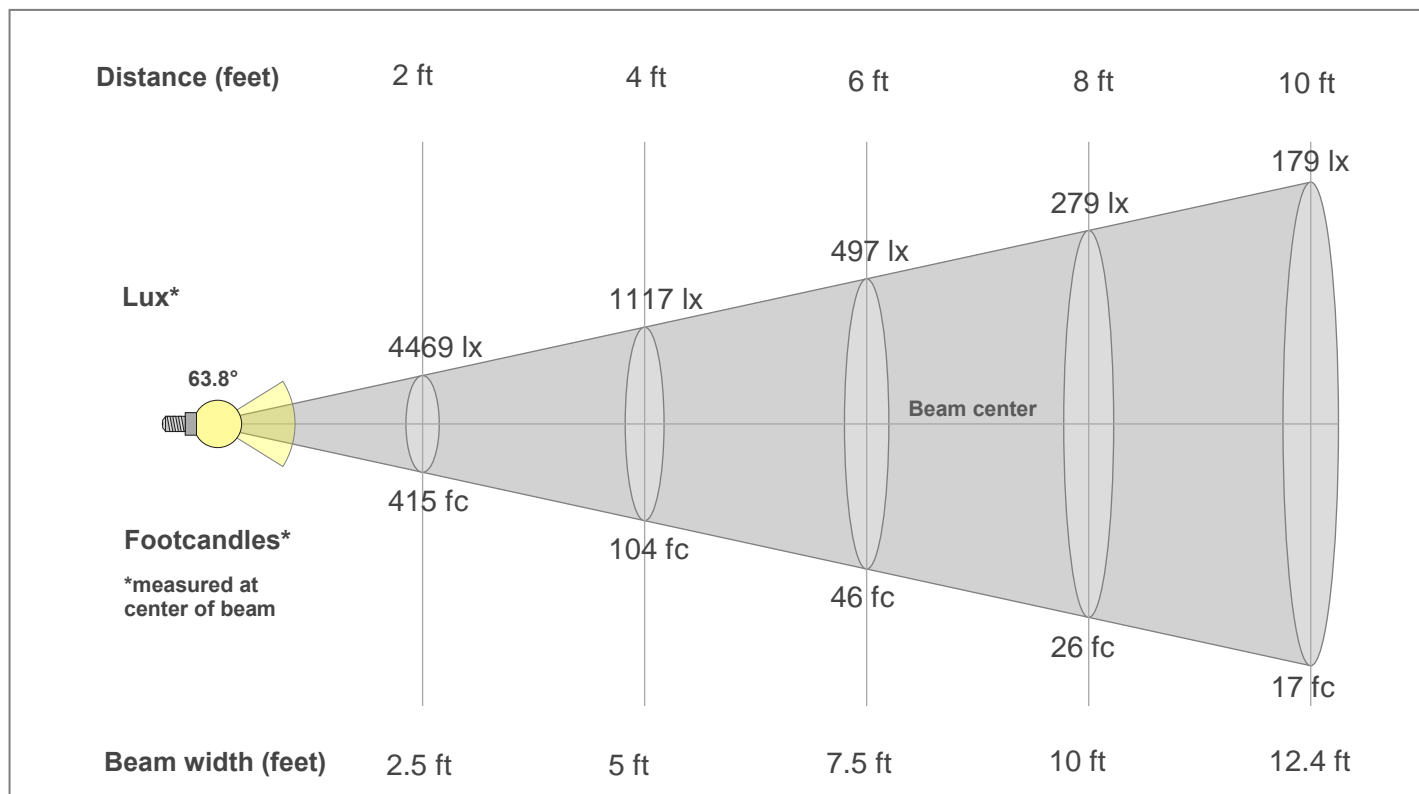

### Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1661lx	415lx	185lx	104lx	66lx	46lx	34lx	26lx	21lx	17lx	14lx	12lx	10lx	8lx	7lx	6lx	6lx	5lx	5lx	4lx
154.3fc	38.6fc	17.1fc	9.6fc	6.2fc	4.3fc	3.1fc	2.4fc	1.9fc	1.5fc	1.3fc	1.1fc	0.9fc	0.8fc	0.7fc	0.6fc	0.5fc	0.5fc	0.4fc	0.4fc

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1661	1661	1664	1670	1677	1684	1688	1683	1668	1639	1596	1527	1434	1319	1182	1021	833	635	456	312
100%	100%	100%	101%	101%	101%	102%	101%	100%	99%	96%	92%	86%	79%	71%	61%	50%	38%	27%	19%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1661	1661	1664	1670	1677	1684	1688	1683	1668	1639	1596	1527	1434	1319	1182	1021	833	635	456	312
100%	100%	100%	101%	101%	101%	102%	101%	100%	99%	96%	92%	86%	79%	71%	61%	50%	38%	27%	19%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1661	1661	1664	1670	1677	1684	1688	1683	1668	1639	1596	1527	1434	1319	1182	1021	833	635	456	312
100%	100%	100%	101%	101%	101%	102%	101%	100%	99%	96%	92%	86%	79%	71%	61%	50%	38%	27%	19%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1661	1661	1664	1670	1677	1684	1688	1683	1668	1639	1596	1527	1434	1319	1182	1021	833	635	456	312
100%	100%	100%	101%	101%	101%	102%	101%	100%	99%	96%	92%	86%	79%	71%	61%	50%	38%	27%	19%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
63.8°	82.8°	96.9°	99.0%	97.0%