

Photometric / Colorimetric / Electric Report

Fixture Model:

200-HD-WD-S-WD-25-NFL-DIM1-2-350-FLS-2-30d

Trim Model:

FLS-2-WH

Date:

8/23/2022



Light efficiency:

24 Lumen/Watt

Light quality:

CRI: 97.2

Color temperature:

3088 K

CIE 1931:

x: 0.428
y: 0.395


Output: 354 lm

Peak: 1142 cd



Power: 14.5 W

PF: 1.0


Spectra:

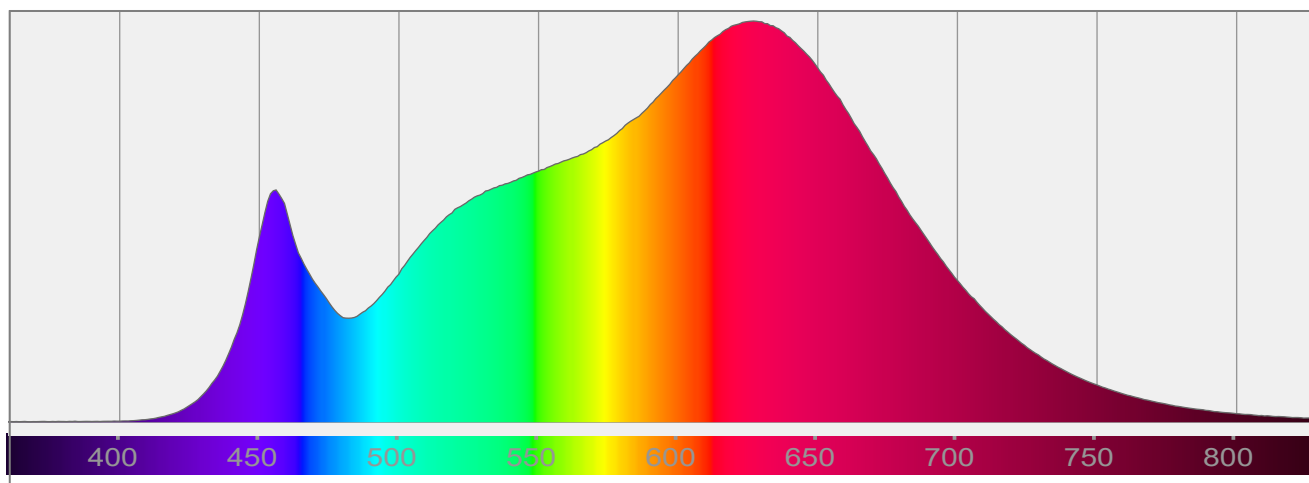


Color Details

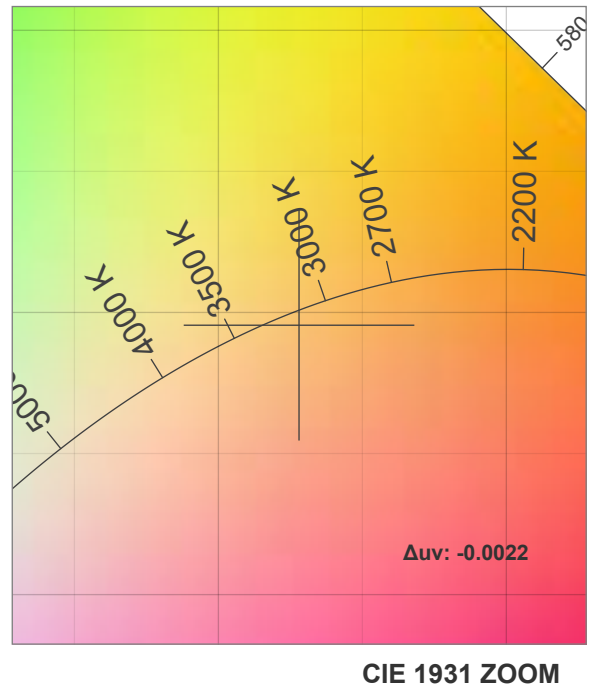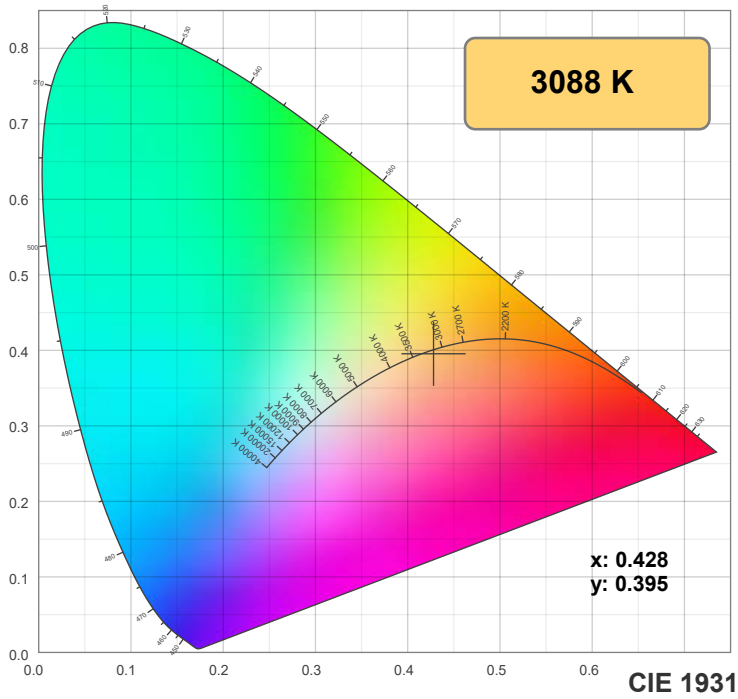

TM-30: 93.5

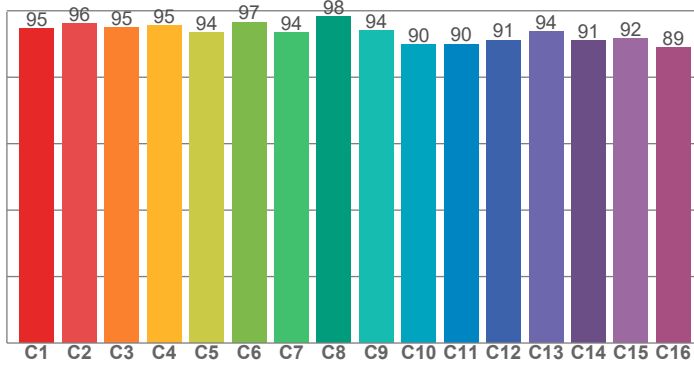

CRI: 97.2 (R1-R8)

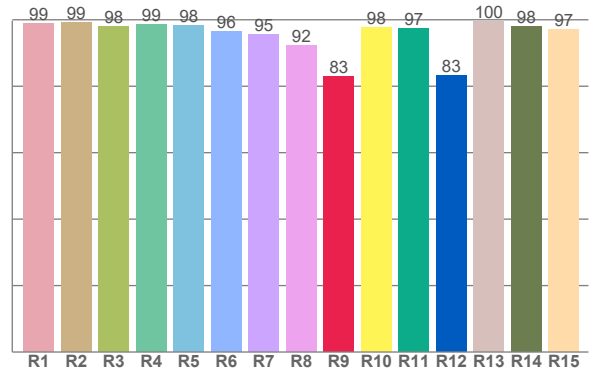

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
99.0	99.3	97.9	98.6	98.4	96.5	95.5	92.3	82.9	97.7	97.3	83.2	99.6	97.9	97.1


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.6	96.1	94.9	95.5	93.5	96.6	93.6	98.4	94.0	89.9	90.0	91.2	93.7	91.1	91.7	88.9

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.7	96.6	90.3	90.5	94.2	96.7	93.3	94.9	97.8	95.7	95.8	95.9	95.9	93.5	93.3

CQS: 93.9

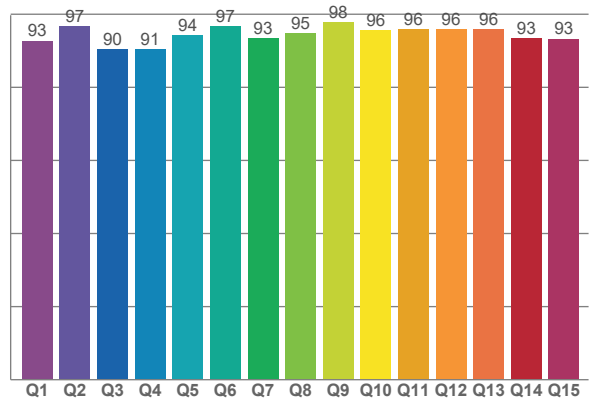

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3088 K	97.2	82.9	93.5	100.7	93.9	0.428	0.395	0.248	0.344	-0.0022

TM-30 Details







Rf 93.5

Fidelity index Rf

Rg 100.7

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	95	-2%	1%
2	96	-1%	1%
3	95	0%	2%
4	95	-2%	0%
5	94	-3%	1%
6	97	1%	1%
7	94	-2%	1%
8	98	0%	0%
9	94	0%	4%
10	90	0%	6%
11	90	3%	7%
12	91	6%	0%
13	94	2%	-4%
14	91	4%	-6%
15	92	0%	-3%
16	89	1%	-9%

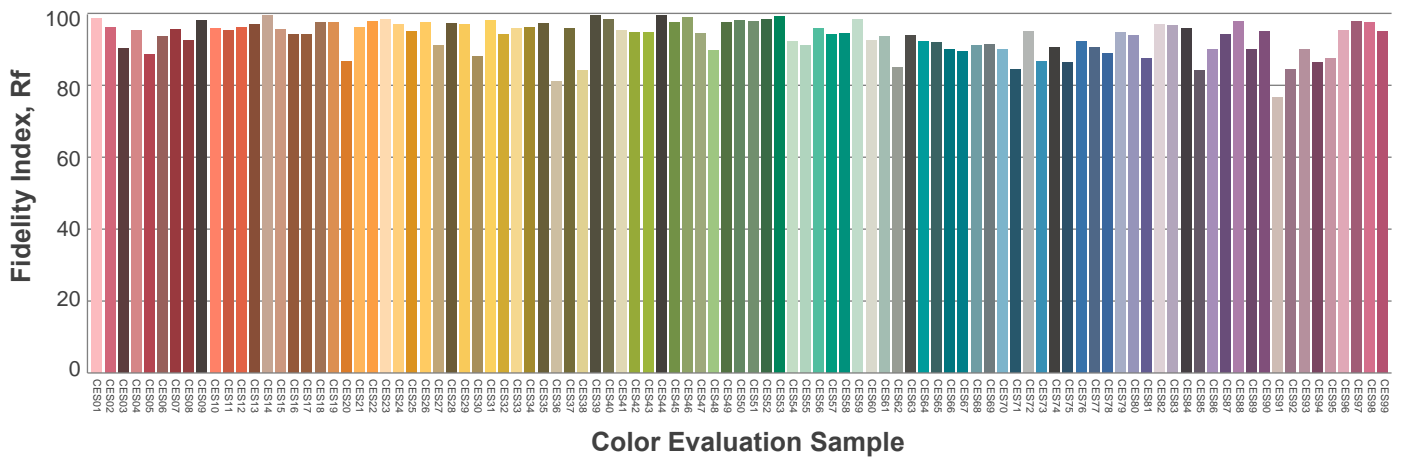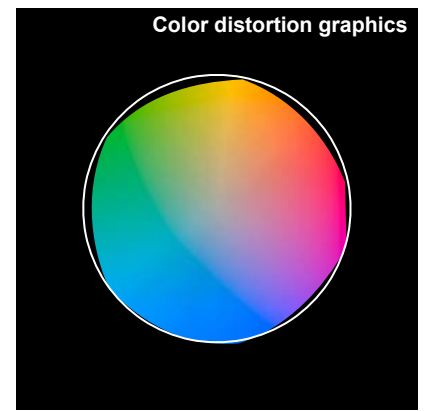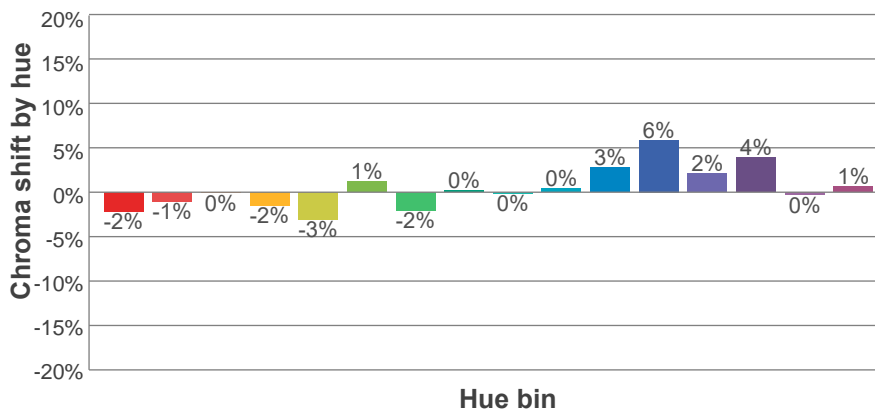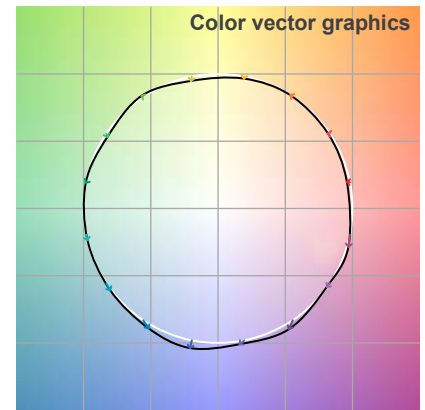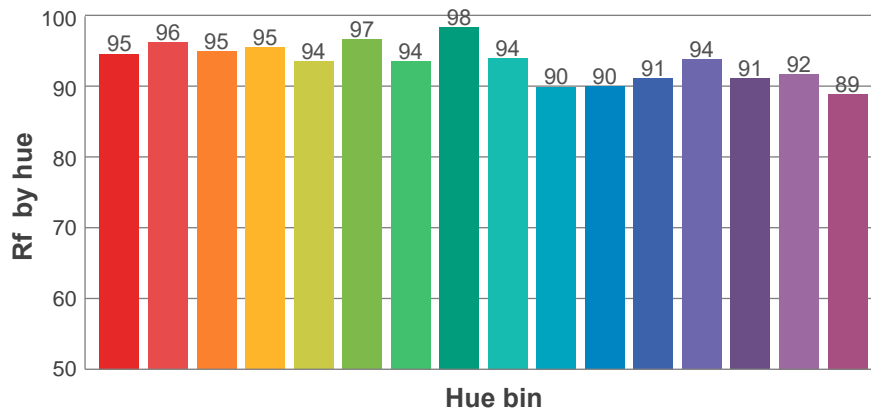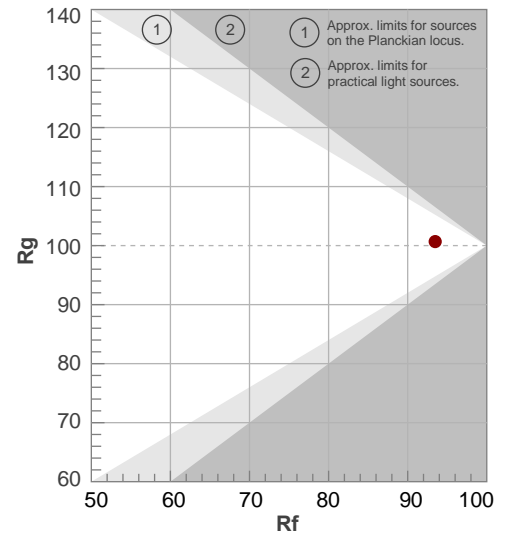

Aiming Angle

