

Photometric / Colorimetric / Electric Report

Fixture Model:

400-WD-2-25-DIM1-4-350-FLS-4-WH

Trim Model:

FLS-4-WH

Date:

4/11/2022



Light efficiency:

47 Lumen/Watt

Light quality:

CRI: 96.8

Color temperature:

2898 K

CIE 1931:

**x: 0.441
y: 0.400**


Output: 686 lm

Peak: 2343 cd



Power: 14.6 W

PF: 0.99


Spectra:

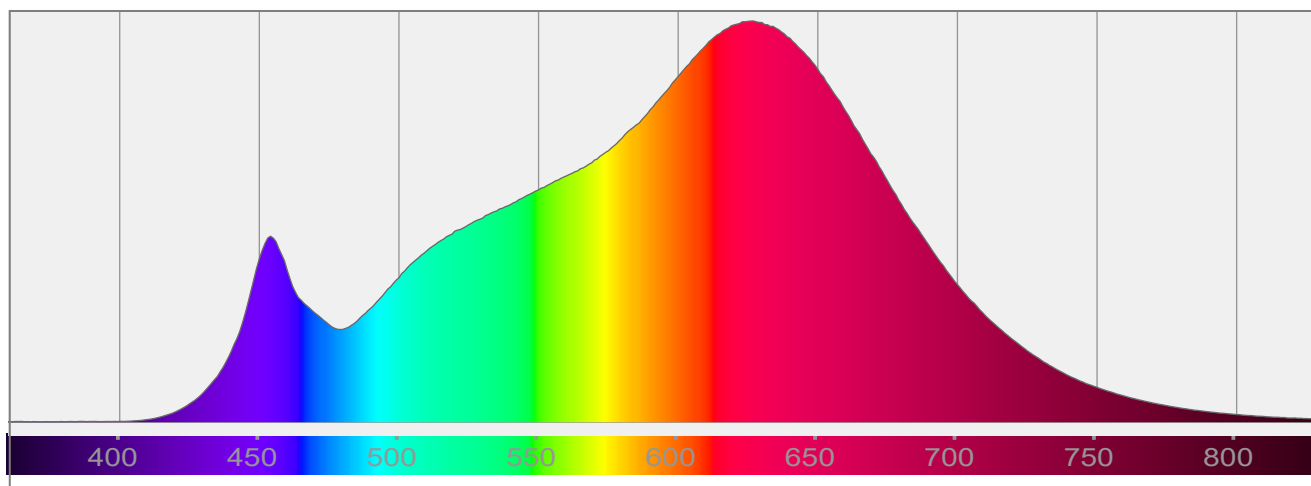


Color Details

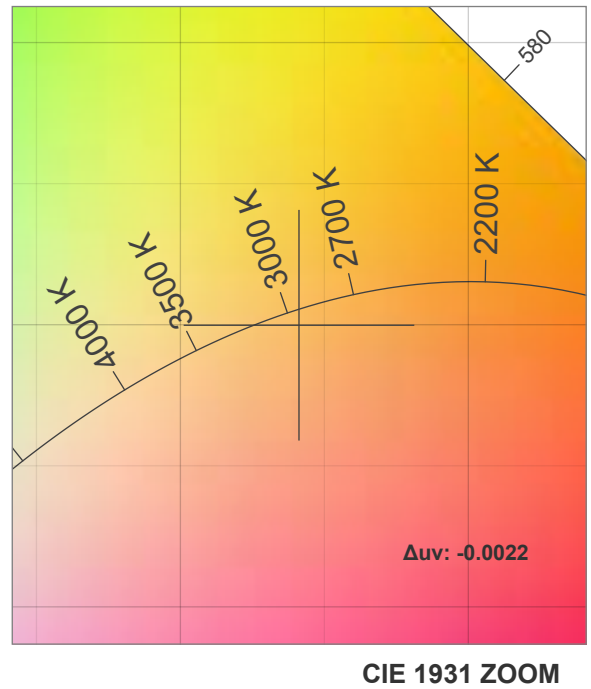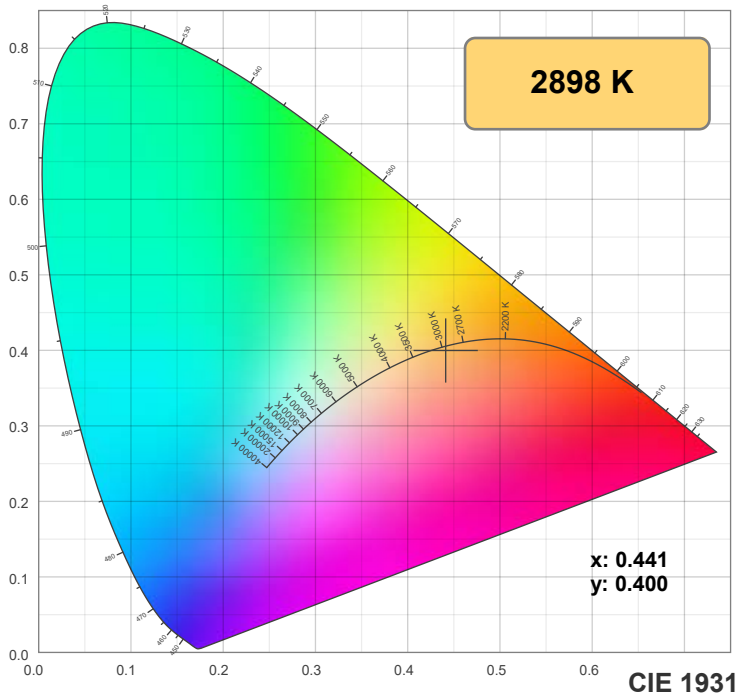

TM-30: 94.3

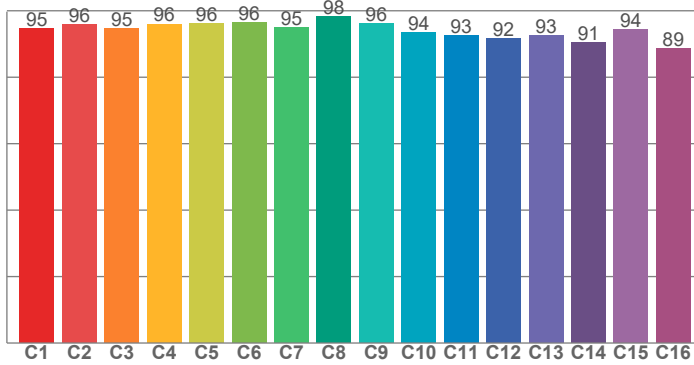

CRI: 96.8 (R1-R8)

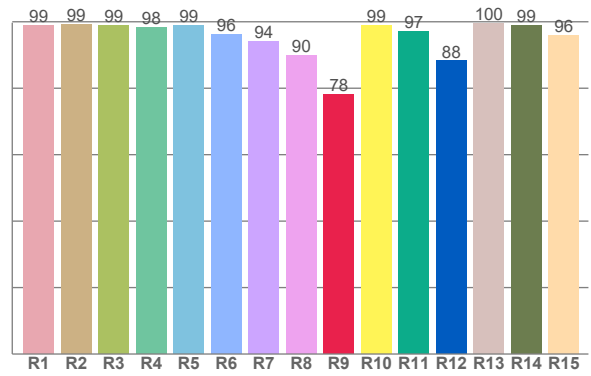

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.8	99.2	98.9	98.4	98.9	96.1	94.2	89.8	78.2	98.8	97.2	88.2	99.5	98.8	95.8


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.6	95.9	94.7	96.0	96.0	96.4	94.9	98.2	96.2	93.6	92.5	91.6	92.6	90.5	94.4	88.7

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91.9	95.9	92.1	92.7	95.9	96.2	93.3	94.4	97.6	96.0	95.8	95.3	94.8	92.1	91.9

CQS: 94.0

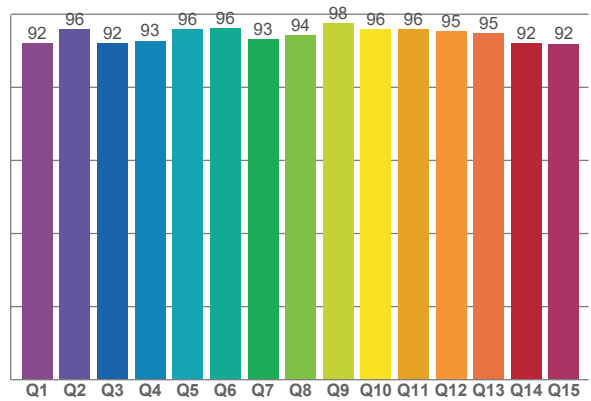

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2898 K	96.8	78.2	94.3	100.7	94.0	0.441	0.400	0.255	0.347	-0.0022

TM-30 Details







Rf 94.3

Fidelity index Rf


Rg 100.7

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	95	-3%	0%
2	96	-1%	1%
3	95	0%	3%
4	96	-1%	0%
5	96	0%	1%
6	96	2%	0%
7	95	-1%	0%
8	98	1%	0%
9	96	0%	2%
10	94	1%	4%
11	93	3%	5%
12	92	5%	-1%
13	93	2%	-5%
14	91	3%	-7%
15	94	-1%	-2%
16	89	-1%	-9%

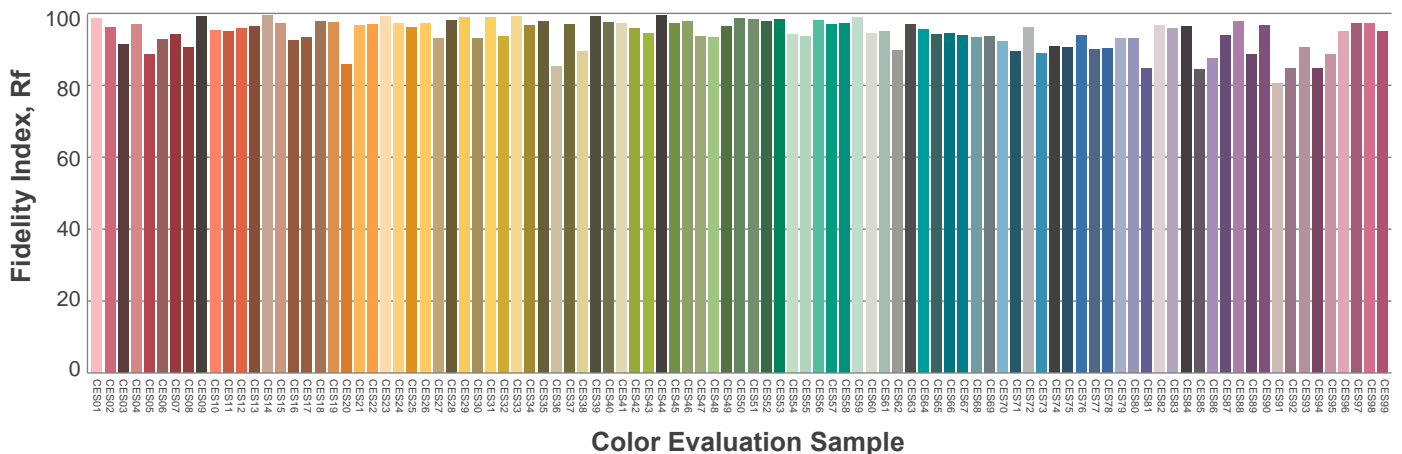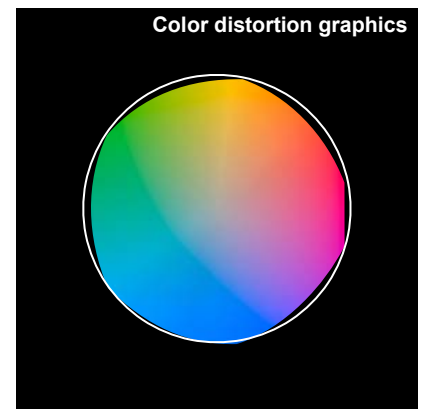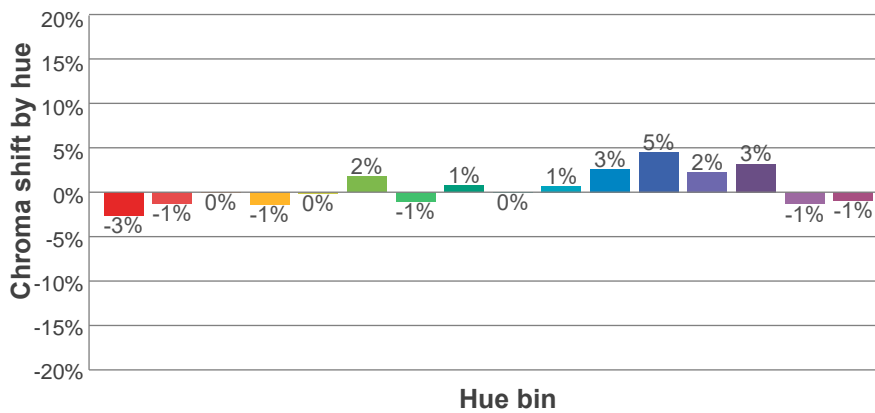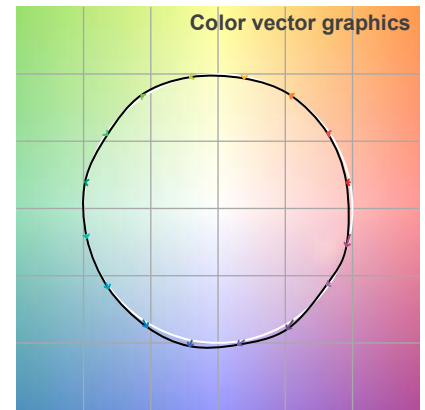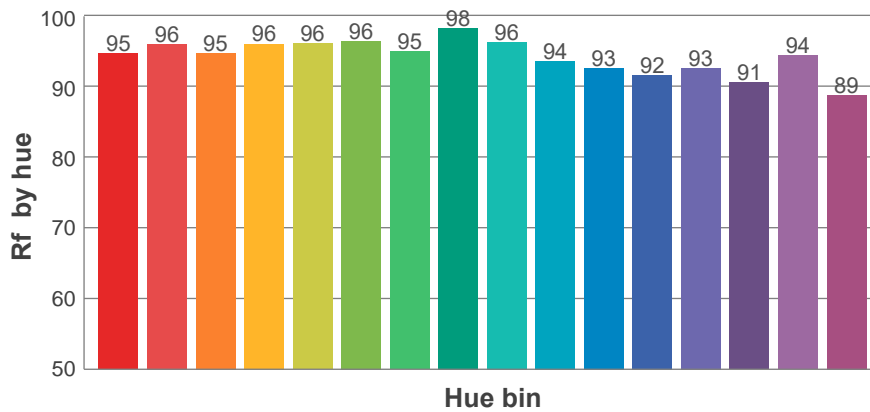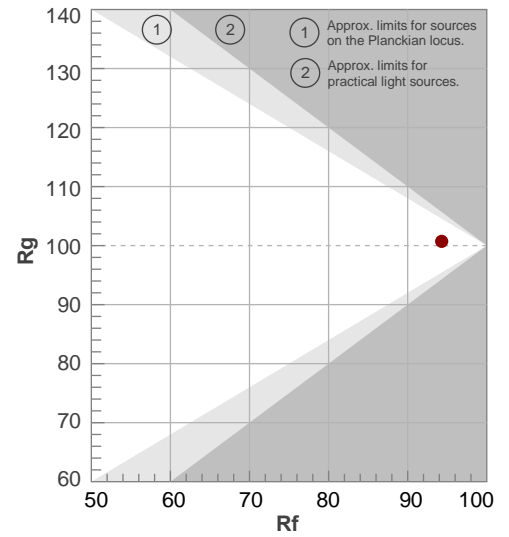

Beam Details

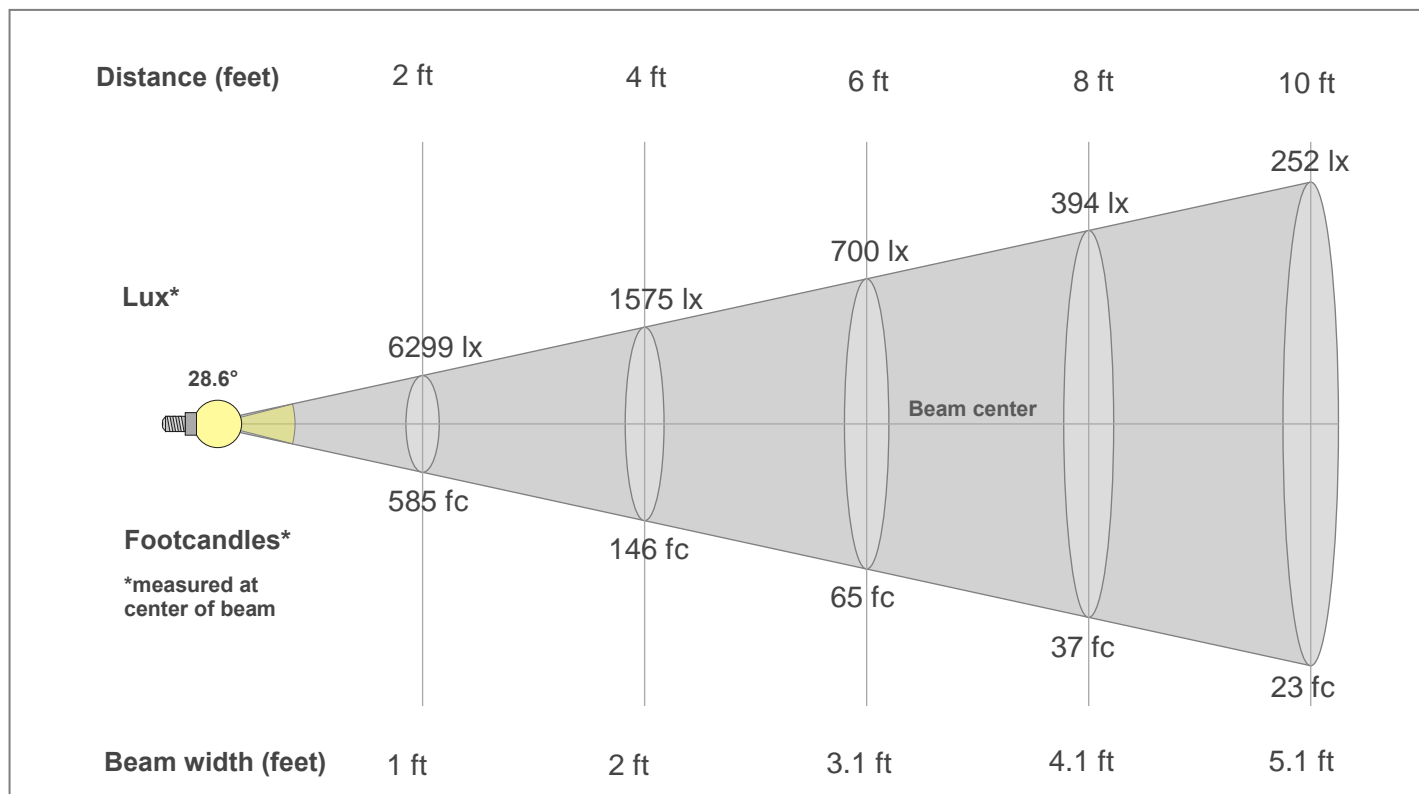

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2341lx	585lx	260lx	146lx	94lx	65lx	48lx	37lx	29lx	23lx	19lx	16lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx
217.5fc	54.4fc	24.2fc	13.6fc	8.7fc	6fc	4.4fc	3.4fc	2.7fc	2.2fc	1.8fc	1.5fc	1.3fc	1.1fc	1fc	0.8fc	0.8fc	0.7fc	0.6fc	0.5fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2341	2304	2202	2049	1863	1650	1429	1196	975	774	605	464	359	277	210	149	101	65	39	23
100%	98%	94%	88%	80%	70%	61%	51%	42%	33%	26%	20%	15%	12%	9%	6%	4%	3%	2%	1%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2341	2315	2215	2062	1880	1667	1447	1215	995	794	623	481	376	292	222	160	108	69	41	24
100%	99%	95%	88%	80%	71%	62%	52%	42%	34%	27%	21%	16%	12%	9%	7%	5%	3%	2%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2341	2304	2202	2049	1863	1650	1429	1196	975	774	605	464	359	277	210	149	101	65	39	23
100%	98%	94%	88%	80%	70%	61%	51%	42%	33%	26%	20%	15%	12%	9%	6%	4%	3%	2%	1%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2341	2315	2215	2062	1880	1667	1447	1215	995	794	623	481	376	292	222	160	108	69	41	24
100%	99%	95%	88%	80%	71%	62%	52%	42%	34%	27%	21%	16%	12%	9%	7%	5%	3%	2%	1%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
28.6°	54.9°	69.1°	99.5%	99.1%