

## Photometric / Colorimetric / Electric Report

Fixture Model:

**400-WD-15-DIM1-4-350-FLS-4-WH**

Trim Model:

**FLS-4-WH**

Date:

**4/8/2022**



Light efficiency:

**56 Lumen/Watt**

Light quality:

**CRI: 96.9**

Color temperature:

**3102 K**

CIE 1931:

**x: 0.428  
y: 0.398**


**Output: 818 lm**

**Peak: 3854 cd**



**Power: 14.6 W**

**PF: 0.99**


Spectra:

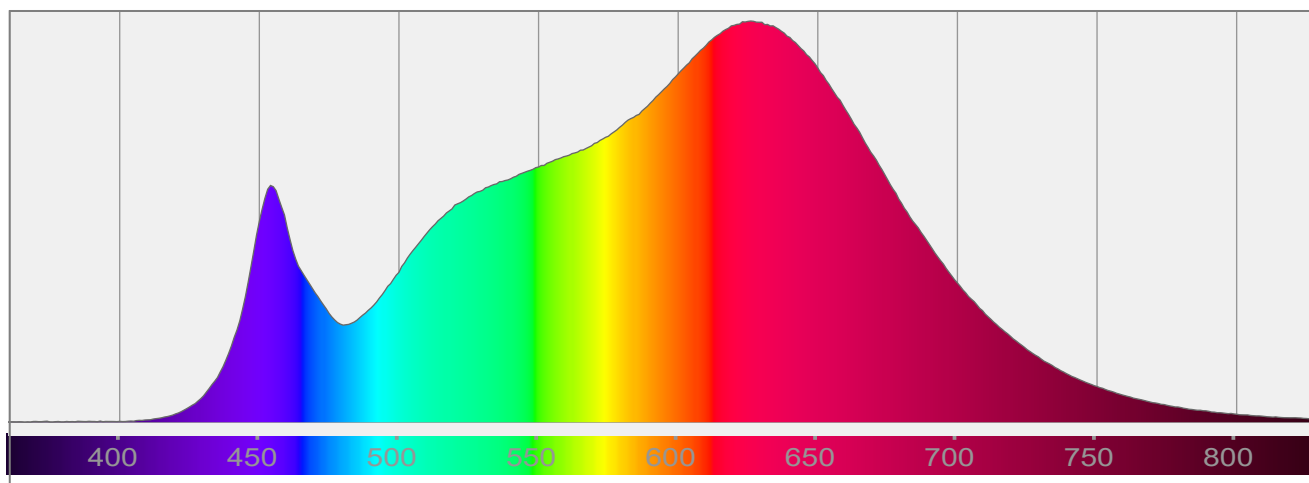


## Color Details

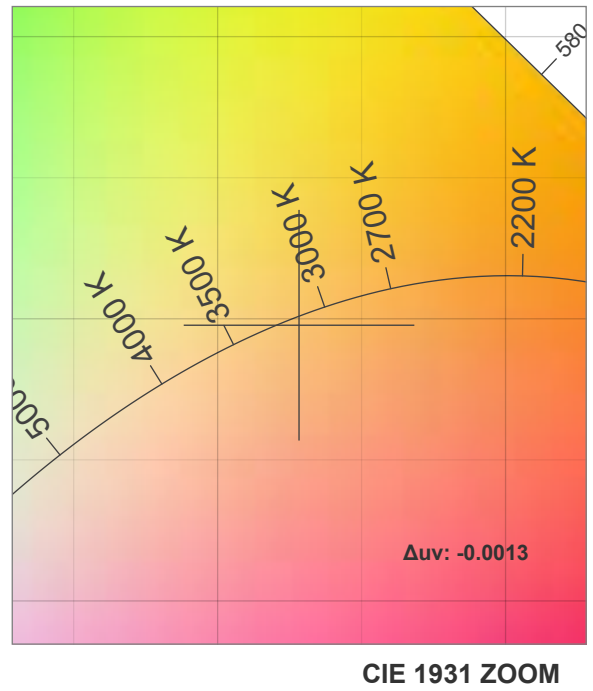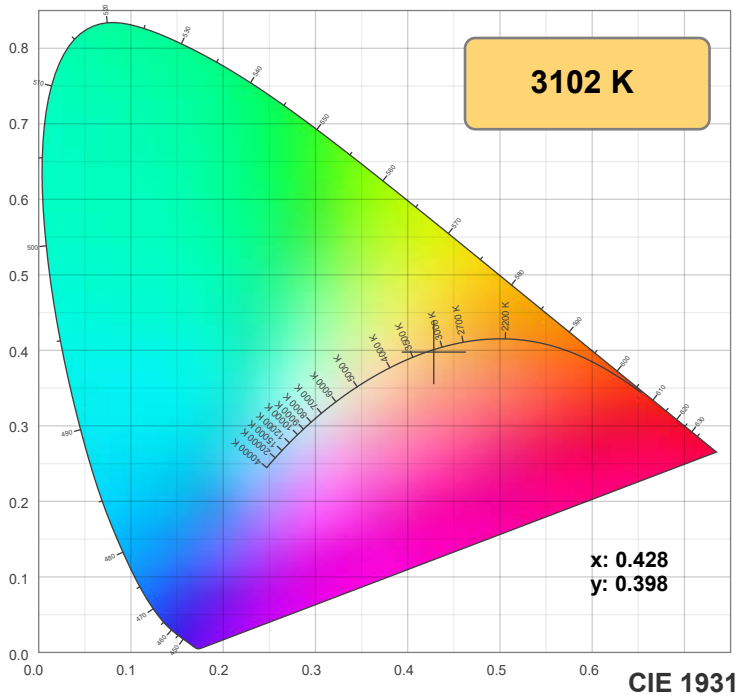

**TM-30: 93.4**

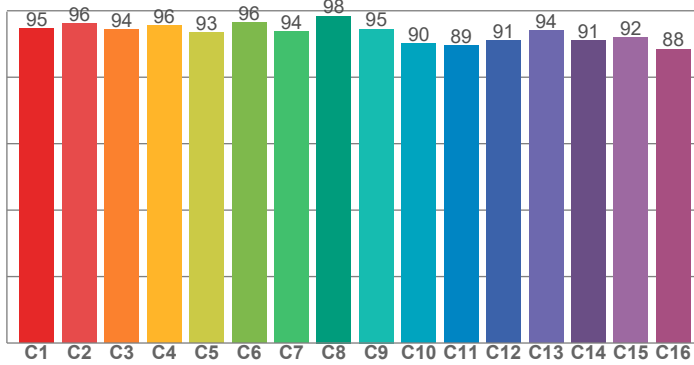

**CRI: 96.9 (R1-R8)**

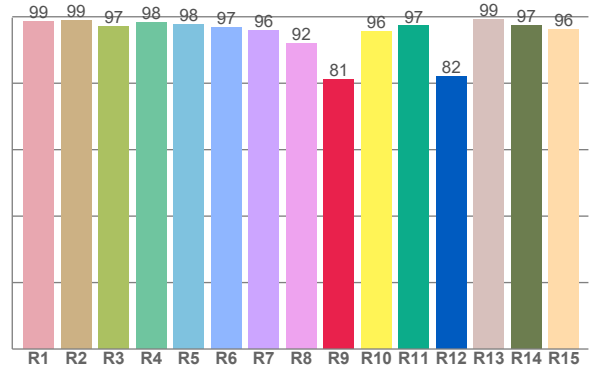

**CRI R Values:**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.5	98.8	97.0	98.2	97.8	96.8	95.9	91.9	81.1	95.6	97.2	82.1	99.1	97.4	96.1


**TM30 C Values:**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.6	96.1	94.4	95.6	93.4	96.4	93.8	98.4	94.5	90.0	89.5	91.1	94.0	90.9	91.9	88.5

**CQS Q values:**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.8	96.8	89.8	90.4	94.4	95.9	93.1	95.0	97.5	95.4	95.8	96.1	96.2	93.3	93.1

**CQS: 93.8**

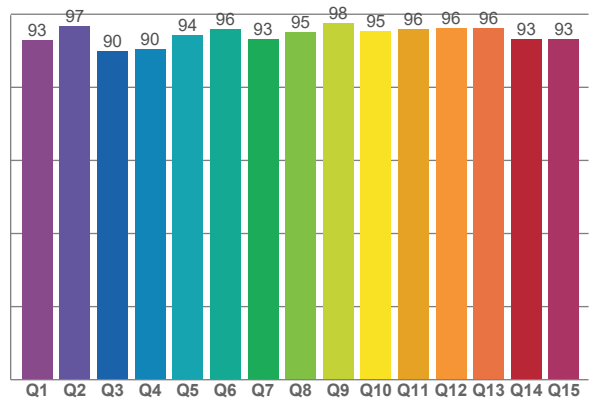

**Color Parameters:**

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
3102 K	96.9	81.1	93.4	100.7	93.8	0.428	0.398	0.248	0.345	-0.0013

# TM-30 Details







**Rf 93.4**

Fidelity index Rf


**Rg 100.7**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	95	-2%	0%
2	96	-1%	1%
3	94	0%	2%
4	96	-1%	0%
5	93	-3%	2%
6	96	2%	1%
7	94	-2%	1%
8	98	0%	0%
9	95	0%	4%
10	90	0%	6%
11	89	2%	7%
12	91	6%	0%
13	94	2%	-3%
14	91	4%	-6%
15	92	0%	-4%
16	88	1%	-9%

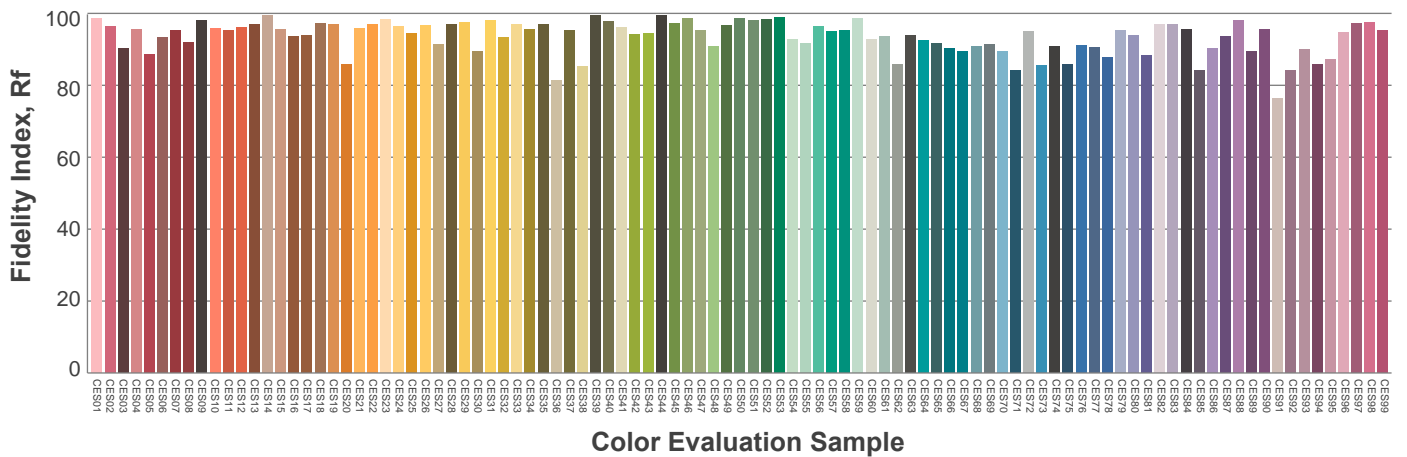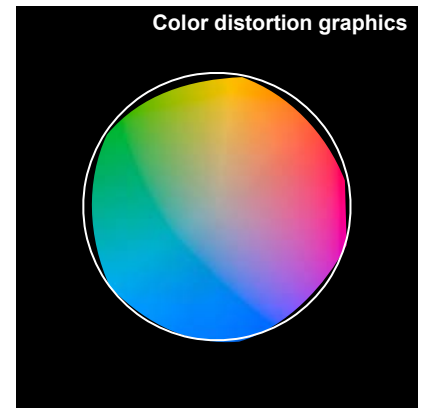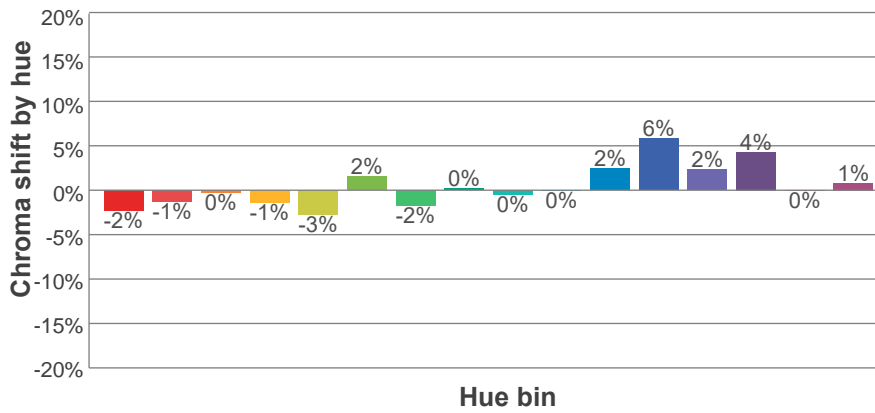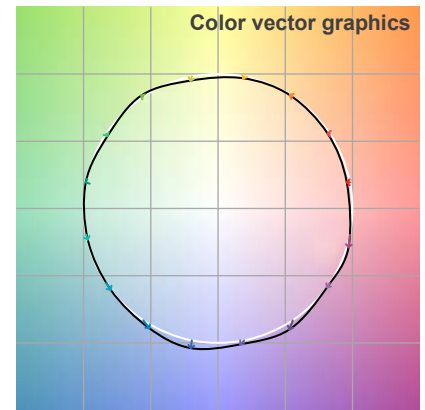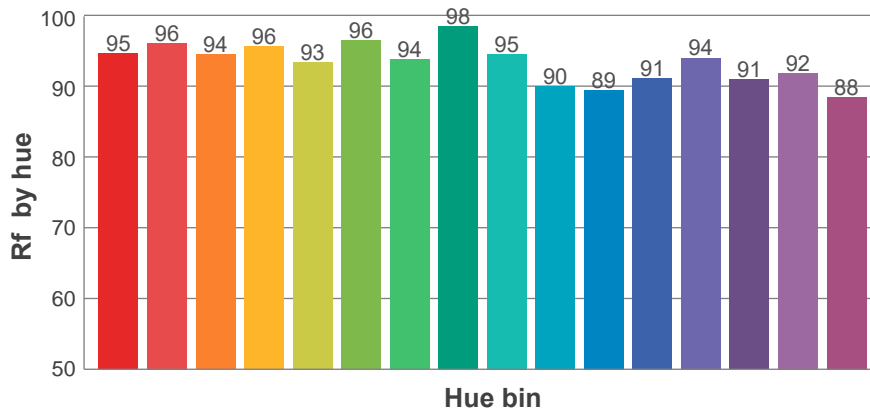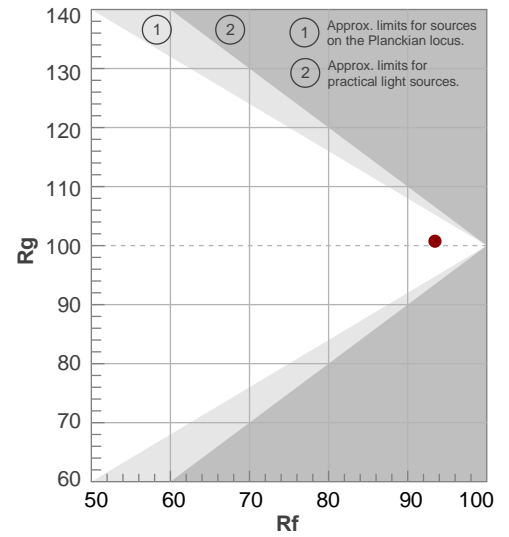

## Beam Details

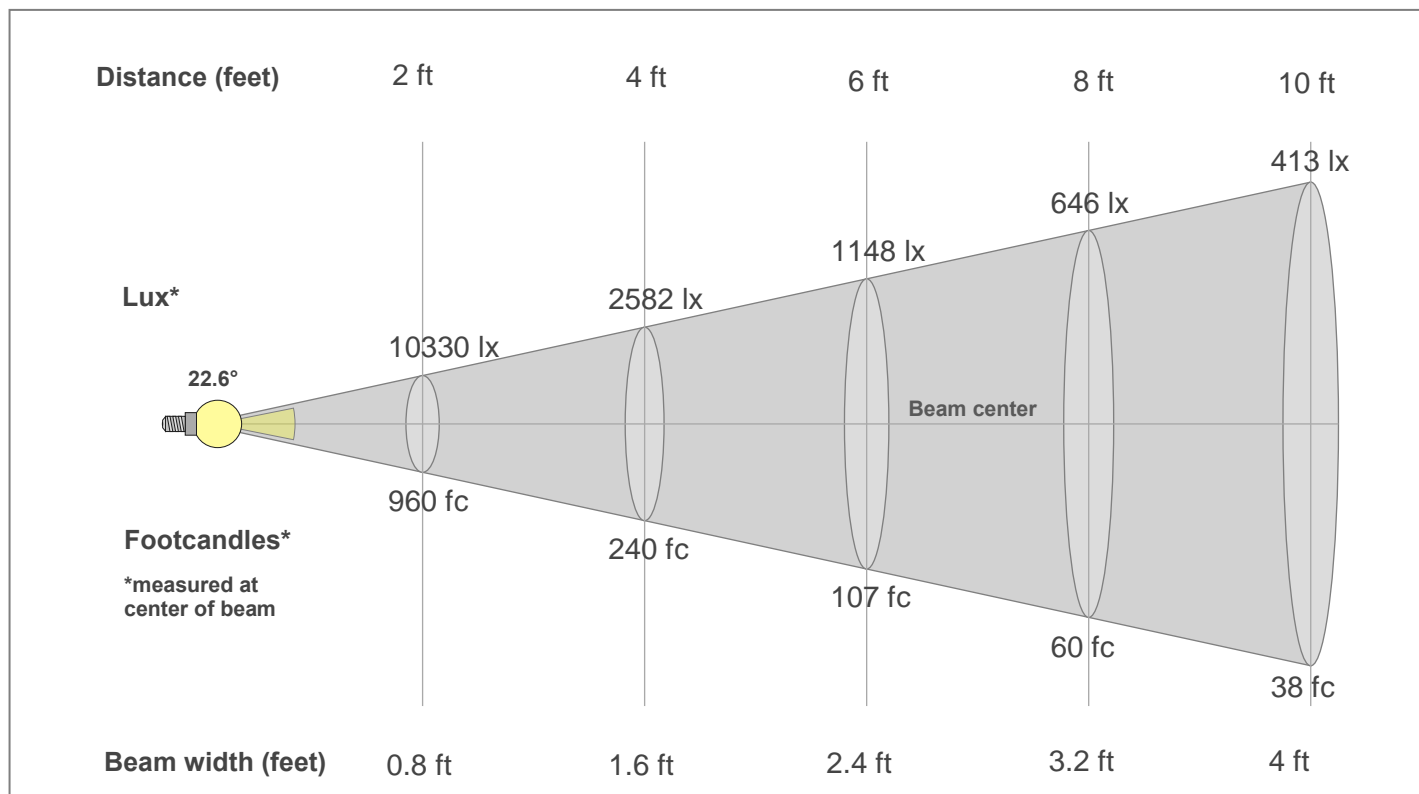

### Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3839lx	960lx	427lx	240lx	154lx	107lx	78lx	60lx	47lx	38lx	32lx	27lx	23lx	20lx	17lx	15lx	13lx	12lx	11lx	10lx
356.6fc	89.2fc	39.6fc	22.3fc	14.3fc	9.9fc	7.3fc	5.6fc	4.4fc	3.6fc	2.9fc	2.5fc	2.1fc	1.8fc	1.6fc	1.4fc	1.2fc	1.1fc	1fc	0.9fc

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3839	3760	3553	3191	2723	2213	1745	1346	1035	797	618	480	372	283	209	148	100	59	31	19
100%	98%	93%	83%	71%	58%	45%	35%	27%	21%	16%	13%	10%	7%	5%	4%	3%	2%	1%	0%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3839	3781	3551	3188	2736	2243	1775	1370	1053	808	627	487	378	292	217	153	103	60	31	19
100%	98%	93%	83%	71%	58%	46%	36%	27%	21%	16%	13%	10%	8%	6%	4%	3%	2%	1%	1%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3839	3760	3553	3191	2723	2213	1745	1346	1035	797	618	480	372	283	209	148	100	59	31	19
100%	98%	93%	83%	71%	58%	45%	35%	27%	21%	16%	13%	10%	7%	5%	4%	3%	2%	1%	0%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3839	3781	3551	3188	2736	2243	1775	1370	1053	808	627	487	378	292	217	153	103	60	31	19
100%	98%	93%	83%	71%	58%	46%	36%	27%	21%	16%	13%	10%	8%	6%	4%	3%	2%	1%	1%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
22.6°	47.6°	64.5°	99.5%	99.3%