

HOUSING: **805-2** - SUPER SHALLOW MULTI-LAMP LAMP MODULE: **J5**, **K5**, or **W5** | LED

Project Name	
Date	Type
Prepared By	
Comments	
Catalog # 805-2 / - /	
/ L1 - - - - / L2 - - - -	




526 Portal Street
Colton, CA 94931
USA
P 707.794.0888
www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2025 No. 8 Lighting
Doc # 91164-1.1



PRODUCT FEATURES

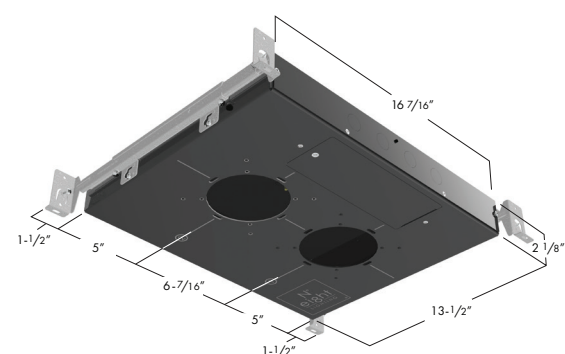

805-2
SUPER SHALLOW MULTI-LAMP HOUSING
(shown with BH mounting accessory)




J5 - LED ADJUSTABLE



K5 - LED FIXED POSITION



W5 - LED WALL WASH

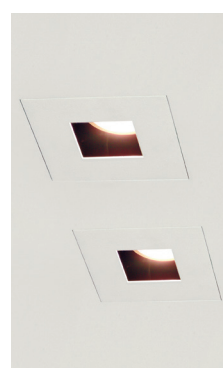

805-2 with **FS-P** trim
(Specified separately)



805-2 with **FR-P** trim
(Specified separately)

805-2 - SPECIFICATION SUMMARY

	Static White Standard Output			Static White High Output	Warm Dimming			Tunable White
LED Option	HI	HI-2	HI-3	HI	WD	WD-2	WD-4	TW
Delivered Lumens	2186	2086	1918	2874	1844	1750	1902	1996
System Wattage	28.4	30.0	29.4	40.6	29.4	29.6	29.2	31.0
Efficacy	77	69	65	71	63	59	65	64
CRI	95	95	97	94	97	97	97	96
R9	63	66	99	61	82	80	76	85
CCT Options	2700K, 3000K				3000-1800K	2800-2200K	3000-2200K	4700-2200K
Optic Options	15, 25, 40	10	10, 15, 25, 40	15, 25, 40	15, 25, 40			15T, 25, 40
Color Consistency	2-Step				3-Step			
Optical Accessories	Narrow, Medium, Wide, Extra Wide, Linear Spread, and 2400K, 2700K, 3500K Color Filters							
Adjustability	J5 - 0-35° Tilt, 360° Rotation, Lockable / K5 - Fixed Position / W5 - 20° Tilt (Fixed Position)							
Driver Options	<1% Forward/Reverse Phase (120v), 0.1/1% 0-10v (120-277v), 0.1/1% DALI (120-277v), 0.1% DMX (120-277v), 0.1% EcoSystem (120 or 277v)							
Trim Options	Round/Square Flat, Round/Square Bevel, Round/Square Inset, Round/Square Wall-Wash							
Finish Options	White, Oil-Rubbed Bronze, Pewter, Satin Nickel, Black							
Trim Mounting Options	Flanged, Flangeless Sheetrock, Flangeless Wood							
Trim Accessory	UL Wet Listed and IP54 Rated Lens Options - Clear, Soft Focus, Wall-Wash							
Housing Options	New Construction: Type IC-CP Rated CCEA Approved Air-Tight							

Data shown for Qty. 2 J5 Lamp Modules with FS/FLS/INS-LG/NL trims.
Static White and Tunable White data shown for 3000K.
Warm Dimming data shown for 3000K and 2800K.
See Performance Summaries for additional information.
800 Series Trims specified separately.

PRODUCT SPECIFIER/PRODUCT ORDER NUMBER


805-2

HOUSING

DRIVER OPTIONS

OUTPUT

MOUNTING ACCESSORIES



805-2

New Construction -
Super Shallow AIRTIGHT-IC
13 - 1/2"W x 16- 7/16"L* x 2-1/8"H†

*Add 3" to length to accommodate mounting accessories.

†Minimum 2-5/8" ceiling space required when used with INSET and BEVEL Series trim assemblies.

PR1-8.5

Premium Forward or Reverse-Phase
<1% Dimming

EL1-8.5*

EldoLED 0-10v 1% Dimming

EL1-01-8.5*

EldoLED 0-10v 0.1% Dimming

EL2-8.5*

EldoLED DALI 1% Dimming

EL2-01-8.5*

EldoLED DALI 0.1% Dimming

DAL2-8.5†

2-channel DALI 0.1% Dimming

DIM6-8.5†

2-channel 0-10v 0.1% Dimming

DMX2-8.5†

2-channel DMX 0.1% Dimming

LU4-8.5*

Lutron Hi-Lume PEQOE EcoSystem 0.1% Dimming

*Available in standard output only.

†Available with TW LED option and standard output only.

350

Standard output for HI-3, HI-3-27, WD, WD-2, or WD-4 LED Options

700†

Standard output for TW LED Option

1000

Standard output for HI, HI-27, HI-2, or HI-2-27 LED Options

1400*

High output for HI or HI-27 LED Options

†For use with DAL2-8.5, DIM6-8.5, or DMX2-8.5 driver options only.

*Not available w/EL1-8.5, EL1-01-8.5, EL2-8.5, EL2-01-8.5 or LU4-8.5 driver options.

BH

Bar Hangers for joist mounting

BB


Butterfly Brackets for c-channel or bar mounting

TBC-BH

T-Bar Mounting Clips + Bar Hangers for T-Bar mounting

PMB

Panel Mounting Brackets (set of two) for direct mounting to wood panels



A combination Lamp Module, LED, Optic Option, and (optional) Optical Accessory is required for each lamp position. Lamp Modules can be intermixed within the same housing but must controlled by the same driver type.

L1-

LAMP
MODULE

LED
OPTIONS

OPTICAL
OPTIONS

OPTICAL
ACCESSORY

L2-

LAMP
MODULE

LED
OPTIONS

OPTICAL
OPTIONS


OPTICAL
ACCESSORY

LAMP MODULE

LED OPTIONS

OPTICAL OPTIONS

OPTICAL ACCESSORIES
(Optional)



J5
LED ADJUSTABLE
35° tilt, full 360° rotation
with tool-less locking



K5
LED FIXED POSITION



W5
LED WALL WASH

HI-27

2700K White LED

HI

3000K White LED

HI-2-27*

2700K White LED

HI-2*

3000K White LED

HI-3-27†

2700K White High R9 LED

HI-3†

3000K White High R9 LED

*For use with 10° optic only.

†Available with J5 and W5 Lamp Modules only.

WD

3000-1800K Warm Dim LED

WD-2

2800-2200K Warm Dim LED

WD-4

3000-2200K Warm Dim LED

TW†

4700-2200K Tunable White LED

10*

10° Very Narrow Spot

15†

15° Narrow Spot

15T**

15° Narrow Spot-Tunable White

25††

25° Narrow Flood

40††

40° Flood

*For use with HI-2 or HI-3 LED options only.

†For use with HI, HI-3, WD, WD-2, or WD-4 LED options only.

**For use with TW LED option only.

††Not for use with HI-2 LED options.

NSP

Narrow Softening Lens

NFL

Medium Softening Lens

FL

Wide Softening Lens

WFL

Extra Wide Softening Lens

LS

Linear Spread Softening Lens

CF24*

2400K Color Filtering Lens

CF27**

2700K Color Filtering Lens

CF35**

3500K Color Filtering Lens

*For use with HI, HI-2, and HI-3

2700K LED options only.

**For use with HI, HI-2, and HI-3

3000K LED options only.

Housing and Installation Notes

805-2 Super Shallow universal IC Rated housing available with two output options. Meets Washington State Airtight Standard WAC S1-11-0502 and in accordance with ASTM E283 to reduce energy loss. CCEA plenum rated for City of Chicago environmental air spaces. Standard and high output options are IC Rated for direct contact with standard or spray foam thermal insulation with a max combined R-Value of R42. For standard output models, ambient temperatures in ceiling space should not exceed 40°C (104°F) during normal operation. For high output models, ambient temperatures should not exceed 25°C (77°F). Accepts two **J5**, **K5**, or **W5** LED Lamp Modules and all **800 Series** Trim Assemblies. For **800 Series** Trims (specified separately), see 8lighting.com/products-800-series-led.

Driver and Output Option Notes

0-10v driver options are configured for linear control. DALI driver options are configured for logarithmic control. No.8 lighting conducts extensive testing to establish compatibility with many dimmer types. For a complete list of compatible dimmers, see 8lighting.com/resources-downloads. Outputs vary depending on LED type, trim type, and optical accessories used. For photometric files in PDF and IES formats, see 8lighting.com/800-series-photometry.

Lamp Module, LED, Optic Option, and Accessory Notes

J5 Fully adjustable lamp module features patented tool-free adjustment mechanism. Use for adjustable accent and general lighting applications. **K5** Fixed position lamp module for general lighting applications. **W5** Fixed position wall wash* lamp module for uniform wall wash applications.

*Requires **WW-8** wall wash accessory (specified separately) with **FS/FR** or **FLS/FLR** (1.75" aperture) **800 Series** trims. For wall washing: specify 40° optic with **HI**, **HI-3**, **WD**, **WD-2**, **WD-4**, or **TW** LED options or 10° optic and **FL** lens with **HI-2** LED options. To ensure fixture to fixture color consistency, use of the same LED option with adjacent fixtures is recommended. One field interchangeable optic option included standard. Up to two additional optical accessories can be accommodated.

Warranty

All No. 8 Lighting products are covered by a 5 year limited warranty. Products installed in residential steam applications are covered by a 2 year limited warranty. For specific warranty details and limitations, see 8lighting.com/resources-downloads.

JA8-2025 CA Title 24 Compliant.

805-2/J5 w/ FS/FLS/INS 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	95	63	1638-1900	28.4	58-67
HI	1000	3000K	95	63	1762-2042	28.4	62-72
HI-27	1400	2700K	94	61	2156-2492	40.6	54-61
HI	1400	3000K	94	61	2318-2680	40.6	58-66
HI-2-27	1000	2700K	95	66	1904	30.0	63
HI-2	1000	3000K	95	66	2048	30.0	68
HI-3-27	350	2700K	95-97	90-99	1492-1726	29.4	50-60
HI-3	350	3000K	95-97	90-99	1604-1856	29.4	54-64
WD	350	3000-1800K	97	82	1456-1682	29.4	50-57
WD-2	350	2800-2200K	97	80	1394-1592	29.6	47-54
WD-4	350	3000-2200K	97	76	1544-1768	29.2	53-61
TW	700	4700-2200K	96	83-85	1482-1882	31.0	48-61

Performance summary for **HI** LED with 15°, 25°, and 40° optic options, **HI-2** LED with 10° optic option, and **HI-3** LED with 10°, 15°, 25°, and 40° optic options.

Performance summary for **WD** and **WD-4** LED at 3000K and **WD-2** LED at 2800K with 15°, 25°, and 40° optic options.

Performance summary for **TW** LED at 3000K with 15°, 25°, and 40° optic options.

805-2/J5 w/ FR/FLR/INR 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	95	63	1604-1880	28.4	57-66
HI	1000	3000K	95	63	1724-2022	28.4	61-71
HI-27	1400	2700K	94	61	2076-2476	40.6	52-61
HI	1400	3000K	94	61	2234-2662	40.6	56-66
HI-2-27	1000	2700K	95	66	1888	30.0	63
HI-2	1000	3000K	95	66	2030	30.0	68
HI-3-27	350	2700K	95-97	90-99	1448-1772	29.4	49-60
HI-3	350	3000K	95-97	90-99	1558-1906	29.4	53-64
WD	350	3000-1800K	97	82	1410-1628	29.4	48-55
WD-2	350	2800-2200K	97	80	1528-1576	29.4	51-53
WD-4	350	3000-2200K	97	76	1522-1758	29.2	52-60
TW	700	4700-2200K	96	82-85	1450-1838	31.0	47-59

Performance summary for **HI** LED with 15°, 25°, and 40° optic options, **HI-2** LED with 10° optic option, and **HI-3** LED with 10°, 15°, 25°, and 40° optic options.

Performance summary for **WD** and **WD-4** LED at 3000K and **WD-2** LED at 2800K with 15°, 25°, and 40° optic options.

Performance summary for **TW** LED at 3000K with 15°, 25°, and 40° optic options.

805/J5 w/ 1.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	24°	45°	54°	13° x 46°
10° Very Narrow Spot	HI-3	14°	26°	42°	50°	14° x 34°
15° Narrow Spot	HI	21°	30°	51°	60°	21° x 51°
15° Narrow Spot	HI-3	17°	29°	49°	55°	17° x 44°
15° Narrow Spot	WD/WD-2/WD-4	24°	32°	51°	59°	24° x 55°
15° Narrow Spot	TW	22°	29°	46°	50°	21° x 42°
25° Narrow Flood	HI	30°	36°	55°	63°	30° x 55°
25° Narrow Flood	HI-3	24°	32°	48°	52°	24° x 43°
25° Narrow Flood	WD/WD-2/WD-4	30°	36°	54°	61°	30° x 57°
25° Narrow Flood	TW	28°	35°	55°	61°	28° x 51°
40° Flood	HI	41°	45°	62°	70°	40° x 63°
40° Flood	HI-3	34°	40°	58°	64°	34° x 57°
40° Flood	WD/WD-2/WD-4	38°	42°	57°	64°	37° x 61°
40° Flood	TW	36°	41°	60°	66°	35° x 57°

*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

805/J5 w/ FS/FLS/INS 1.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

STANDARD OUTPUT	10° - Very Narrow Spot 805/J5-HI-2-10/1000 2 ft - 3,852 fc Ø0.4 ft 4 ft - 963 fc Ø0.8 ft 6 ft - 428 fc Ø1.2 ft 8 ft - 241 fc Ø1.6 ft 10 ft - 154 fc Ø2.0 ft CBCP: 15,447 cd	15° - Narrow Spot 805/J5-HI-15/1000 2 ft - 1,488 fc Ø0.7 ft 4 ft - 372 fc Ø1.3 ft 6 ft - 165 fc Ø2.0 ft 8 ft - 93 fc Ø2.6 ft 10 ft - 60 fc Ø3.3 ft CBCP: 5,954 cd	25° - Narrow Flood 805/J5-HI-25/1000 2 ft - 726 fc Ø1.0 ft 4 ft - 182 fc Ø2.1 ft 6 ft - 81 fc Ø3.1 ft 8 ft - 45 fc Ø4.2 ft 10 ft - 29 fc Ø5.2 ft CBCP: 2,906 cd	40° - Flood 805/J5-HI-40/1000 2 ft - 459 fc Ø1.5 ft 4 ft - 115 fc Ø3.0 ft 6 ft - 51 fc Ø4.5 ft 8 ft - 29 fc Ø6.0 ft 10 ft - 18 fc Ø7.5 ft CBCP: 1,839 cd			
	HI-300H OUTPUT		15° - Narrow Spot 805/J5-HI-15/1400 2 ft - 1,967 fc Ø0.7 ft 4 ft - 492 fc Ø1.3 ft 6 ft - 219 fc Ø2.0 ft 8 ft - 123 fc Ø2.7 ft 10 ft - 79 fc Ø3.3 ft CBCP: 7,880 cd	25° - Narrow Flood 805/J5-HI-25/1400 2 ft - 952 fc Ø1.1 ft 4 ft - 238 fc Ø2.1 ft 6 ft - 106 fc Ø3.1 ft 8 ft - 60 fc Ø4.2 ft 10 ft - 38 fc Ø5.2 ft CBCP: 3,811 cd	40° - Flood 805/J5-HI-40/1400 2 ft - 605 fc Ø1.5 ft 4 ft - 151 fc Ø3.0 ft 6 ft - 67 fc Ø4.5 ft 8 ft - 38 fc Ø6.0 ft 10 ft - 24 fc Ø7.5 ft CBCP: 2,424 cd		
		STANDARD OUTPUT - HI-3	10° - Very Narrow Spot 805/J5-HI-3-10/350 2 ft - 3,041 fc Ø0.4 ft 4 ft - 760 fc Ø0.9 ft 6 ft - 338 fc Ø1.3 ft 8 ft - 190 fc Ø1.8 ft 10 ft - 122 fc Ø2.2 ft CBCP: 12,432 cd	15° - Narrow Spot 805/J5-HI-3-15/350 2 ft - 1,958 fc Ø0.5 ft 4 ft - 490 fc Ø1.1 ft 6 ft - 218 fc Ø1.6 ft 8 ft - 122 fc Ø2.2 ft 10 ft - 78 fc Ø2.7 ft CBCP: 7,849 cd	25° - Narrow Flood 805/J5-HI-3-25/350 2 ft - 998 fc Ø0.8 ft 4 ft - 249 fc Ø1.6 ft 6 ft - 111 fc Ø2.4 ft 8 ft - 62 fc Ø3.2 ft 10 ft - 40 fc Ø4.0 ft CBCP: 3,993 cd	40° - Flood 805/J5-HI-3-40/350 2 ft - 537 fc Ø1.2 ft 4 ft - 134 fc Ø2.4 ft 6 ft - 60 fc Ø3.6 ft 8 ft - 34 fc Ø4.9 ft 10 ft - 21 fc Ø6.1 ft CBCP: 2,148 cd	
			STANDARD OUTPUT - WARM DIM		15° - Narrow Spot 805/J5-WD-15/350 2 ft - 961 fc Ø0.8 ft 4 ft - 240 fc Ø1.6 ft 6 ft - 107 fc Ø2.5 ft 8 ft - 60 fc Ø3.3 ft 10 ft - 38 fc Ø4.1 ft CBCP: 3,847 cd	25° - Narrow Flood 805/J5-WD-25/350 2 ft - 604 fc Ø1.1 ft 4 ft - 151 fc Ø2.1 ft 6 ft - 67 fc Ø3.1 ft 8 ft - 38 fc Ø4.2 ft 10 ft - 24 fc Ø5.2 ft CBCP: 2,417 cd	40° - Flood 805/J5-WD-40/350 2 ft - 444 fc Ø1.3 ft 4 ft - 111 fc Ø2.7 ft 6 ft - 49 fc Ø4.0 ft 8 ft - 28 fc Ø5.4 ft 10 ft - 18 fc Ø6.7 ft CBCP: 1,776 cd
				STANDARD OUTPUT - TUNABLE WHITE	15° - Narrow Spot 805/J5-TW-15T/700 2 ft - 1,628 fc Ø0.7 ft 4 ft - 407 fc Ø1.5 ft 6 ft - 181 fc Ø2.2 ft 8 ft - 102 fc Ø3.0 ft 10 ft - 65 fc Ø3.7 ft CBCP: 6,539 cd	25° - Narrow Flood 805/J5-TW-25/700 2 ft - 669 fc Ø1.0 ft 4 ft - 167 fc Ø1.9 ft 6 ft - 74 fc Ø2.9 ft 8 ft - 42 fc Ø3.9 ft 10 ft - 27 fc Ø4.9 ft CBCP: 2,677 cd	40° - Flood 805/J5-TW-40/700 2 ft - 487 fc Ø1.3 ft 4 ft - 122 fc Ø2.6 ft 6 ft - 54 fc Ø3.8 ft 8 ft - 30 fc Ø5.1 ft 10 ft - 19 fc Ø6.4 ft CBCP: 1,950 cd

Note: Performance shown for individual lamp modules at 3000K. Output varies by CCT.

805-2/J5 w/ FS/FLS/INS-LG/NL 2.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	95	63	1816-2032	28.4	64-72
HI	1000	3000K	95	63	1952-2186	28.4	69-77
HI-27	1400	2700K	94	61	2398-2672	40.6	60-66
HI	1400	3000K	94	61	2578-2874	40.6	64-71
HI-2-27	1000	2700K	95	66	1940	30.0	64
HI-2	1000	3000K	95	66	2086	30.0	69
HI-3-27	350	2700K	95-97	90-99	1618-1784	29.4	55-61
HI-3	350	3000K	95-97	90-99	1740-1918	29.4	59-66
WD	350	3000-1800K	97	82	1760-1844	29.4	57-63
WD-2	350	2800-2200K	97	80	1588-1750	29.6	54-59
WD-4	350	3000-2200K	97	76	1730-1902	29.2	59-65
TW	700	4700-2200K	96	83-85	1644-1996	31.0	53-64

Performance summary for **HI** LED with 15°, 25°, and 40° optic options, **HI-2** LED with 10° optic option, and **HI-3** LED with 10°, 15°, 25°, and 40° optic options.

Performance summary for **WD** and **WD-4** LED at 3000K and **WD-2** LED at 2800K with 15°, 25°, and 40° optic options.

Performance summary for **TW** LED at 3000K with 15°, 25°, and 40° optic options.

805-2/J5 w/ FR/FLR/INR-LG/NL 2.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	95	63	1814-2022	28.4	64-71
HI	1000	3000K	95	63	1950-2174	28.4	69-76
HI-27	1400	2700K	94	61	2378-2678	40.6	59-66
HI	1400	3000K	94	61	2556-2880	40.6	63-71
HI-2-27	1000	2700K	95	66	1944	30.0	65
HI-2	1000	3000K	95	66	2090	30.0	70
HI-3-27	350	2700K	95-97	90-99	1584-1806	29.4	54-61
HI-3	350	3000K	95-97	90-99	1704-1942	29.4	58-66
WD	350	3000-1800K	97	82	1654-1814	29.4	57-62
WD-2	350	2800-2200K	97	80	1594-1748	29.6	53-59
WD-4	350	3000-2200K	97	76	1738-1904	29.2	59-65
TW	700	4700-2200K	96	82-85	1638-1990	31.0	53-64

Performance summary for **HI** LED with 15°, 25°, and 40° optic options and **HI-2** LED with 10° optic option, and **HI-3** LED with 10°, 15°, 25°, and 40° optic options.

Performance summary for **WD** and **WD-4** LED at 3000K and **WD-2** LED at 2800K with 15°, 25°, and 40° optic options.


Performance summary for **TW** LED at 3000K with 15°, 25°, and 40° optic options.

805/J5 w/ 2.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	24°	47°	58°	13° x 50°
10° Very Narrow Spot	HI-3	14°	26°	44°	54°	14° x 35°
15° Narrow Spot	HI	21°	31°	55°	67°	22° x 56°
15° Narrow Spot	HI-3	17°	29°	52°	59°	17° x 47°
15° Narrow Spot	WD/WD-2/WD-4	24°	33°	55°	67°	24° x 62°
15° Narrow Spot	TW	23°	30°	50°	56°	21° x 47°
25° Narrow Flood	HI	30°	37°	60°	72°	30° x 61°
25° Narrow Flood	HI-3	24°	33°	56°	64°	24° x 45°
25° Narrow Flood	WD/WD-2/WD-4	30°	37°	59°	71°	30° x 64°
25° Narrow Flood	TW	28°	36°	59°	68°	28° x 55°
40° Flood	HI	41°	45°	68°	81°	41° x 70°
40° Flood	HI-3	35°	41°	63°	73°	34° x 60°
40° Flood	WD/WD-2/WD-4	38°	43°	65°	78°	37° x 71°
40° Flood	TW	36°	42°	64°	74°	36° x 61°

*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

805/J5 w/ FS/FLS/INS-LG/NL 2.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

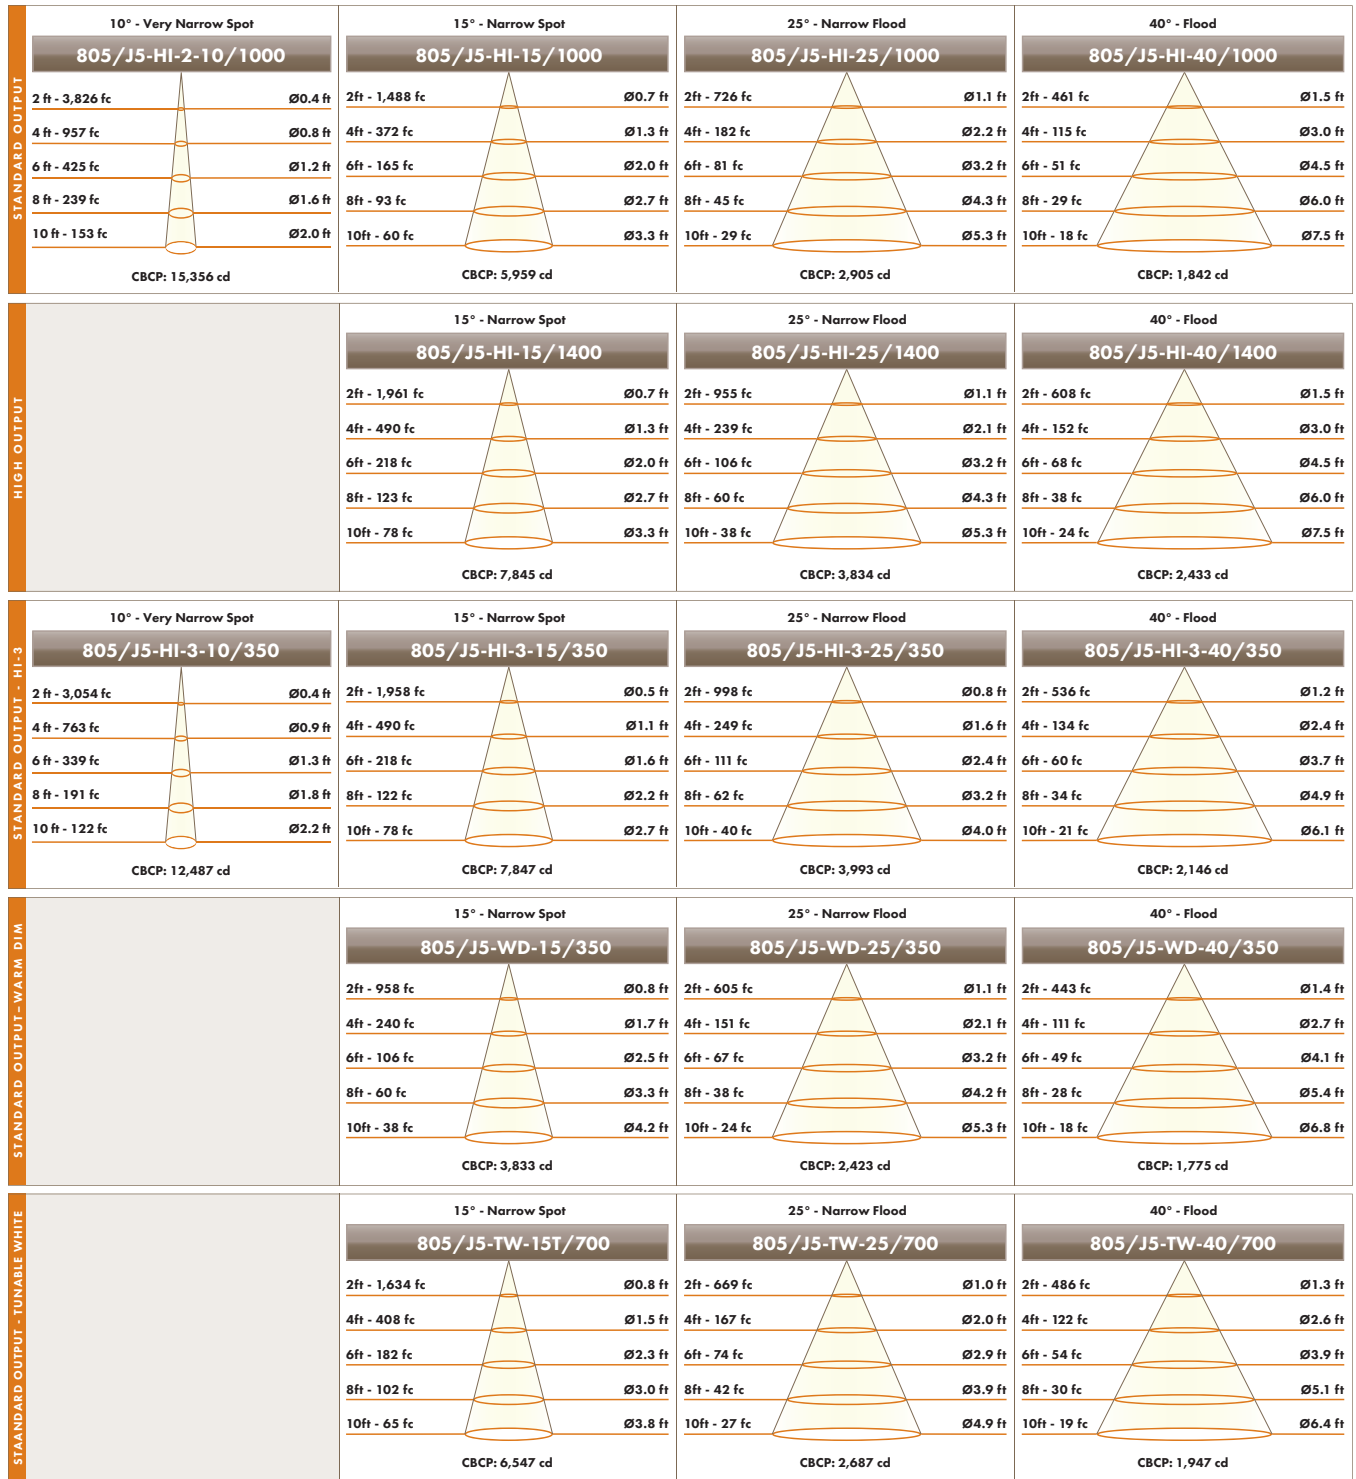

Performance shown for 3000K. Output varies by CCT.

805-2/K5 w/ FS/FLS/INS 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	95	63	1772-2014	29.0	61-69
HI	1000	3000K	94	63	1894-2178	29.0	65-75
HI-27	1400	2700K	94	60	2302-2628	41.0	56-64
HI	1400	3000K	94	60	2458-2846	41.0	60-69
HI-2-27	1000	2700K	95	63	1930	30.0	64
HI-2	1000	3000K	94	63	2122	30.0	71
WD	350	3000-1800K	97	83	1566-1788	30.0	52-60
WD-2	350	2800-2200K	97	78	1600-1816	30.0	53-61
WD-4	350	3000-2200K	97	76	1604-1826	29.4	55-62

Performance summary for **HI** LED with 15°, 25°, and 40° optic options and **HI-2** LED with 10° optic option.

Performance summary for **WD** and **WD-4** LED at 3000K and **WD-2** LED at 2800K with 15°, 25°, and 40° optic options.

805-2/K5 w/ FR/FLR/INR 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	95	63	1760-2024	29.0	61-70
HI	1000	3000K	94	62	1870-2132	29.0	65-74
HI-27	1400	2700K	94	60	2276-2624	41.0	56-64
HI	1400	3000K	94	60	2444-2842	41.0	60-69
HI-2-27	1000	2700K	95	63	1954	30.0	65
HI-2	1000	3000K	95	65	2116	30.0	71
WD	350	3000-1800K	97	83	1526-1772	30.0	51-59
WD-2	350	2800-2200K	97	79	1596-1832	30.0	53-61
WD-4	350	3000-2200K	97	76	1568-1792	29.4	54-61

Performance summary for **HI** LED with 15°, 25°, and 40° optic options and **HI-2** LED with 10° optic option.

Performance summary for **WD** and **WD-4** LED at 3000K and **WD-2** LED at 2800K with 15°, 25°, and 40° optic options.

805/K5 w/ 1.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	25°	48°	58°	14° x 34°
15° Narrow Spot	HI	21°	31°	55°	66°	23° x 47°
15° Narrow Spot	WD/WD-2/WD-4	25°	32°	45°	65°	25° x 47°
25° Narrow Flood	HI	31°	37°	58°	70°	31° x 57°
25° Narrow Flood	WD/WD-2/WD-4	30°	36°	57°	67°	30° x 59°
40° Flood	HI	42°	46°	67°	77°	48° x 55°
40° Flood	WD/WD-2/WD-4	38°	43°	62°	71°	39° x 58°

*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

805/K5 w/ FS/FLS/INS 1.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

STANDARD OUTPUT	10° - Very Narrow Spot 805/K5-HI-2-10/1000 <table><tr><td>2 ft - 3,982 fc</td><td>Ø0.4 ft</td></tr><tr><td>4 ft - 996 fc</td><td>Ø0.8 ft</td></tr><tr><td>6 ft - 442 fc</td><td>Ø1.2 ft</td></tr><tr><td>8 ft - 249 fc</td><td>Ø1.5 ft</td></tr><tr><td>10 ft - 159 fc</td><td>Ø1.9 ft</td></tr></table> CBCP: 15,979 cd	2 ft - 3,982 fc	Ø0.4 ft	4 ft - 996 fc	Ø0.8 ft	6 ft - 442 fc	Ø1.2 ft	8 ft - 249 fc	Ø1.5 ft	10 ft - 159 fc	Ø1.9 ft	15° - Narrow Spot 805/K5-HI-15/1000 <table><tr><td>2ft - 1,487 fc</td><td>Ø0.7 ft</td></tr><tr><td>4ft - 372 fc</td><td>Ø1.3 ft</td></tr><tr><td>6ft - 165 fc</td><td>Ø2.0 ft</td></tr><tr><td>8ft - 93 fc</td><td>Ø2.7 ft</td></tr><tr><td>10ft - 59 fc</td><td>Ø3.4 ft</td></tr></table> CBCP: 5,953 cd	2ft - 1,487 fc	Ø0.7 ft	4ft - 372 fc	Ø1.3 ft	6ft - 165 fc	Ø2.0 ft	8ft - 93 fc	Ø2.7 ft	10ft - 59 fc	Ø3.4 ft	25° - Narrow Flood 805/K5-HI-25/1000 <table><tr><td>2ft - 722 fc</td><td>Ø1.1 ft</td></tr><tr><td>4ft - 181 fc</td><td>Ø2.1 ft</td></tr><tr><td>6ft - 80 fc</td><td>Ø3.2 ft</td></tr><tr><td>8ft - 45 fc</td><td>Ø4.3 ft</td></tr><tr><td>10ft - 29 fc</td><td>Ø5.3 ft</td></tr></table> CBCP: 2,889 cd	2ft - 722 fc	Ø1.1 ft	4ft - 181 fc	Ø2.1 ft	6ft - 80 fc	Ø3.2 ft	8ft - 45 fc	Ø4.3 ft	10ft - 29 fc	Ø5.3 ft	40° - Flood 805/K5-HI-40/1000 <table><tr><td>2ft - 448 fc</td><td>Ø1.5 ft</td></tr><tr><td>4ft - 112 fc</td><td>Ø3.1 ft</td></tr><tr><td>6ft - 50 fc</td><td>Ø4.6 ft</td></tr><tr><td>8ft - 28 fc</td><td>Ø6.1 ft</td></tr><tr><td>10ft - 18 fc</td><td>Ø7.6 ft</td></tr></table> CBCP: 1,791 cd	2ft - 448 fc	Ø1.5 ft	4ft - 112 fc	Ø3.1 ft	6ft - 50 fc	Ø4.6 ft	8ft - 28 fc	Ø6.1 ft	10ft - 18 fc	Ø7.6 ft
	2 ft - 3,982 fc	Ø0.4 ft																																										
	4 ft - 996 fc	Ø0.8 ft																																										
	6 ft - 442 fc	Ø1.2 ft																																										
	8 ft - 249 fc	Ø1.5 ft																																										
10 ft - 159 fc	Ø1.9 ft																																											
2ft - 1,487 fc	Ø0.7 ft																																											
4ft - 372 fc	Ø1.3 ft																																											
6ft - 165 fc	Ø2.0 ft																																											
8ft - 93 fc	Ø2.7 ft																																											
10ft - 59 fc	Ø3.4 ft																																											
2ft - 722 fc	Ø1.1 ft																																											
4ft - 181 fc	Ø2.1 ft																																											
6ft - 80 fc	Ø3.2 ft																																											
8ft - 45 fc	Ø4.3 ft																																											
10ft - 29 fc	Ø5.3 ft																																											
2ft - 448 fc	Ø1.5 ft																																											
4ft - 112 fc	Ø3.1 ft																																											
6ft - 50 fc	Ø4.6 ft																																											
8ft - 28 fc	Ø6.1 ft																																											
10ft - 18 fc	Ø7.6 ft																																											
HI-30GH OUTPUT	15° - Narrow Spot 805/K5-HI-15/1400 <table><tr><td>2ft - 1,978 fc</td><td>Ø0.7 ft</td></tr><tr><td>4ft - 494 fc</td><td>Ø1.3 ft</td></tr><tr><td>6ft - 220 fc</td><td>Ø2.0 ft</td></tr><tr><td>8ft - 124 fc</td><td>Ø2.7 ft</td></tr><tr><td>10ft - 79 fc</td><td>Ø3.4 ft</td></tr></table> CBCP: 7,922 cd	2ft - 1,978 fc	Ø0.7 ft	4ft - 494 fc	Ø1.3 ft	6ft - 220 fc	Ø2.0 ft	8ft - 124 fc	Ø2.7 ft	10ft - 79 fc	Ø3.4 ft	25° - Narrow Flood 805/K5-HI-25/1400 <table><tr><td>2ft - 944 fc</td><td>Ø1.1 ft</td></tr><tr><td>4ft - 236 fc</td><td>Ø2.1 ft</td></tr><tr><td>6ft - 105 fc</td><td>Ø3.2 ft</td></tr><tr><td>8ft - 59 fc</td><td>Ø4.3 ft</td></tr><tr><td>10ft - 38 fc</td><td>Ø5.3 ft</td></tr></table> CBCP: 3,778 cd	2ft - 944 fc	Ø1.1 ft	4ft - 236 fc	Ø2.1 ft	6ft - 105 fc	Ø3.2 ft	8ft - 59 fc	Ø4.3 ft	10ft - 38 fc	Ø5.3 ft	40° - Flood 805/K5-HI-40/1400 <table><tr><td>2ft - 583 fc</td><td>Ø1.5 ft</td></tr><tr><td>4ft - 146 fc</td><td>Ø3.1 ft</td></tr><tr><td>6ft - 65 fc</td><td>Ø4.6 ft</td></tr><tr><td>8ft - 36 fc</td><td>Ø6.1 ft</td></tr><tr><td>10ft - 23 fc</td><td>Ø7.7 ft</td></tr></table> CBCP: 2,332 cd	2ft - 583 fc	Ø1.5 ft	4ft - 146 fc	Ø3.1 ft	6ft - 65 fc	Ø4.6 ft	8ft - 36 fc	Ø6.1 ft	10ft - 23 fc	Ø7.7 ft											
	2ft - 1,978 fc	Ø0.7 ft																																										
	4ft - 494 fc	Ø1.3 ft																																										
6ft - 220 fc	Ø2.0 ft																																											
8ft - 124 fc	Ø2.7 ft																																											
10ft - 79 fc	Ø3.4 ft																																											
2ft - 944 fc	Ø1.1 ft																																											
4ft - 236 fc	Ø2.1 ft																																											
6ft - 105 fc	Ø3.2 ft																																											
8ft - 59 fc	Ø4.3 ft																																											
10ft - 38 fc	Ø5.3 ft																																											
2ft - 583 fc	Ø1.5 ft																																											
4ft - 146 fc	Ø3.1 ft																																											
6ft - 65 fc	Ø4.6 ft																																											
8ft - 36 fc	Ø6.1 ft																																											
10ft - 23 fc	Ø7.7 ft																																											
STANDARD OUTPUT - WARM DIM	15° - Narrow Spot 805/K5-WD-15/350 <table><tr><td>2ft - 987 fc</td><td>Ø0.8 ft</td></tr><tr><td>4ft - 247 fc</td><td>Ø1.6 ft</td></tr><tr><td>6ft - 110 fc</td><td>Ø2.5 ft</td></tr><tr><td>8ft - 62 fc</td><td>Ø3.3 ft</td></tr><tr><td>10ft - 39 fc</td><td>Ø4.1 ft</td></tr></table> CBCP: 3,955 cd	2ft - 987 fc	Ø0.8 ft	4ft - 247 fc	Ø1.6 ft	6ft - 110 fc	Ø2.5 ft	8ft - 62 fc	Ø3.3 ft	10ft - 39 fc	Ø4.1 ft	25° - Narrow Flood 805/K5-WD-25/350 <table><tr><td>2ft - 608 fc</td><td>Ø1.1 ft</td></tr><tr><td>4ft - 152 fc</td><td>Ø2.1 ft</td></tr><tr><td>6ft - 68 fc</td><td>Ø3.2 ft</td></tr><tr><td>8ft - 38 fc</td><td>Ø4.2 ft</td></tr><tr><td>10ft - 24 fc</td><td>Ø5.3 ft</td></tr></table> CBCP: 2,434 cd	2ft - 608 fc	Ø1.1 ft	4ft - 152 fc	Ø2.1 ft	6ft - 68 fc	Ø3.2 ft	8ft - 38 fc	Ø4.2 ft	10ft - 24 fc	Ø5.3 ft	40° - Flood 805/K5-WD-40/350 <table><tr><td>2ft - 459 fc</td><td>Ø1.4 ft</td></tr><tr><td>4ft - 115 fc</td><td>Ø2.7 ft</td></tr><tr><td>6ft - 51 fc</td><td>Ø4.1 ft</td></tr><tr><td>8ft - 29 fc</td><td>Ø5.4 ft</td></tr><tr><td>10ft - 18 fc</td><td>Ø6.8 ft</td></tr></table> CBCP: 1,837 cd	2ft - 459 fc	Ø1.4 ft	4ft - 115 fc	Ø2.7 ft	6ft - 51 fc	Ø4.1 ft	8ft - 29 fc	Ø5.4 ft	10ft - 18 fc	Ø6.8 ft											
	2ft - 987 fc	Ø0.8 ft																																										
	4ft - 247 fc	Ø1.6 ft																																										
6ft - 110 fc	Ø2.5 ft																																											
8ft - 62 fc	Ø3.3 ft																																											
10ft - 39 fc	Ø4.1 ft																																											
2ft - 608 fc	Ø1.1 ft																																											
4ft - 152 fc	Ø2.1 ft																																											
6ft - 68 fc	Ø3.2 ft																																											
8ft - 38 fc	Ø4.2 ft																																											
10ft - 24 fc	Ø5.3 ft																																											
2ft - 459 fc	Ø1.4 ft																																											
4ft - 115 fc	Ø2.7 ft																																											
6ft - 51 fc	Ø4.1 ft																																											
8ft - 29 fc	Ø5.4 ft																																											
10ft - 18 fc	Ø6.8 ft																																											

Note: Performance shown for individual lamp modules at 3000K. Output varies by CCT.

805/K5 w/ FS/FLS/INS-LG/NL 2.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	95	63	1898-2108	29.0	65-73
HI	1000	3000K	94	62	2038-2268	29.0	70-78
HI-27	1400	2700K	94	60	2468-2748	41.0	60-67
HI	1400	3000K	94	60	2650-2966	41.0	65-72
HI-2-27	1000	2700K	95	64	1984	30.0	66
HI-2	1000	3000K	95	65	2164	30.0	72
WD	350	3000-1800K	97	83	1718-1888	30.0	57-63
WD-2	350	2800-2200K	97	80	1754-1888	30.0	59-63
WD-4	350	3000-2200K	97	76	1760-1938	29.4	60-66

Performance summary for **HI** LED with 15°, 25°, and 40° optic options and **HI-2** LED with 10° optic option.

Performance summary for **WD** and **WD-4** LED at 3000K and **WD-2** LED at 2800K with 15°, 25°, and 40° optic options.

805/K5 w/ FR/FLR/INR-LG/NL 2.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	95	63	1908-2108	29.0	66-73
HI	1000	3000K	94	63	2030-2280	29.0	70-79
HI-27	1400	2700K	94	61	2456-2758	41.0	60-67
HI	1400	3000K	94	60	2650-2962	41.0	65-72
HI-2-27	1000	2700K	95	63	1966	30.0	66
HI-2	1000	3000K	95	65	2154	30.0	72
WD	350	3000-1800K	97	83	1700-1892	30.0	56-63
WD-2	350	2800-2200K	97	79	1776-1950	30.0	59-65
WD-4	350	3000-2200K	97	76	1750-1920	29.4	60-66

Performance summary for **HI** LED with 15°, 25°, and 40° optic options and **HI-2** LED with 10° optic option.


Performance summary for **WD** and **WD-4** LED at 3000K and **WD-2** LED at 2800K with 15°, 25°, and 40° optic options.

805/K5 w/ 2.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	25°	49°	62°	14° x 35°
15° Narrow Spot	HI	21°	32°	57°	71°	23° x 47°
15° Narrow Spot	WD/WD-2/WD-4	25°	33°	58°	71°	25° x 49°
25° Narrow Flood	HI	32°	38°	62°	77°	31° x 61°
25° Narrow Flood	WD/WD-2/WD-4	31°	37°	62°	75°	30° x 65°
40° Flood	HI	43°	46°	70°	84°	48° x 56°
40° Flood	WD/WD-2/WD-4	38°	43°	67°	80°	39° x 61°

* Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

805/K5 w/ FS/FLS/INS-LG/NL 2.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

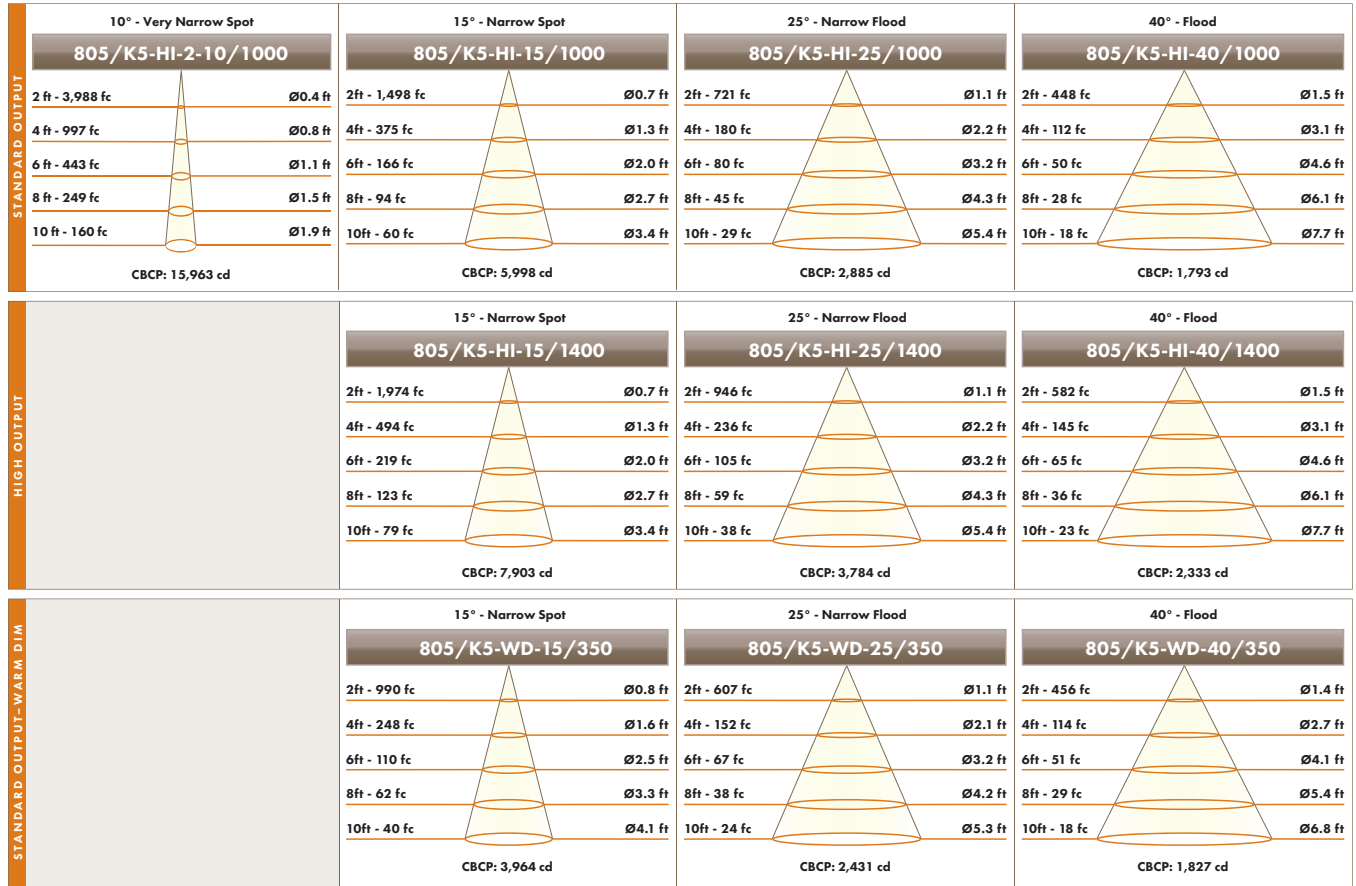

Note: Performance shown for individual lamp modules at 3000K. Output varies by CCT.

805-2/W5 w/ FS/FLS-WW-8 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	OPTIC OPTION	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	40	2700K	95	63	1348	29.0	46
HI	1000	40	3000K	95	63	1446	29.0	50
HI-27	1400	40	2700K	94	61	1754	41.0	43
HI	1400	40	3000K	94	60	1886	41.0	46
HI-2-27	1000	10-FL	2700K	95	64	1044	30.0	35
HI-2	1000	10-FL	3000K	95	66	1144	30.0	38
HI-3-27	350	40	2700K	97	97	1138	29.4	39
HI-3	350	40	3000K	97	97	1224	29.4	42
WD	350	40	3000-1800K	97	82	1170	30.0	39
WD-2	350	40	2800-2200K	97	80	1216	30.0	41
WD-4	350	40	3000-2200K	97	77	1198	29.2	41
TW	700	40	4700-2200K	97	86	1160	31.2	37

Performance summary for **TW**, **WD** and **WD-4** LED at 3000K, **WD-2** LED at 2800K.

805-2/W5 w/ FR/FLR-WW-8 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	OPTIC OPTION	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	40	2700K	95	63	1270	29.0	44
HI	1000	40	3000K	94	62	1376	29.0	47
HI-27	1400	40	2700K	94	61	1650	41.0	40
HI	1400	40	3000K	94	60	1782	41.0	43
HI-2-27	1000	10-FL	2700K	95	64	958	30.0	32
HI-2	1000	10-FL	3000K	95	65	1048	30.0	35
HI-3-27	350	40	2700K	97	98	1052	29.4	35
HI-3	350	40	3000K	97	98	1132	29.4	38
WD	350	40	3000-1800K	97	82	1102	30.0	37
WD-2	350	40	2800-2200K	97	79	1136	30.0	38
WD-4	350	40	3000-2200K	97	77	1122	29.2	38
TW	700	40	4700-2200K	97	86	1090	31.2	35

Performance summary for **TW**, **WD** and **WD-4** LED at 3000K, **WD-2** LED at 2800K.

805/W5-HI-40/1000 w/ FS/FLS TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.8	0.5	0.8	0.7	0.3	0.7	0.1	0.1	0.1	0.1	0.1
		1.5 ft	28.7	29.6	28.7	26.3	23.2	26.3	14.3	14.1	14.3	13.4	13.4
		2.5 ft	29.5	32.3	29.5	26.6	27.7	26.6	20.5	22.0	20.5	18.9	18.9
		3.5 ft	19.8	21.7	19.8	18.0	19.7	18.0	17.1	18.8	17.1	15.7	17.0
		4.5 ft	12.3	13.2	12.3	11.4	12.4	11.4	12.1	13.2	12.1	11.2	12.3
		5.5 ft	7.7	8.1	7.7	7.3	7.8	7.3	8.3	8.9	8.3	7.8	8.4
		6.5 ft	5.0	5.2	5.0	4.8	5.1	4.8	5.7	6.0	5.7	5.4	5.8
		7.5 ft	3.4	3.5	3.4	3.3	3.4	3.3	4.0	4.1	4.0	3.8	4.0
		8.5 ft	2.4	2.5	2.4	2.3	2.4	2.3	2.9	3.0	2.9	2.8	2.9
		9.5 ft	1.7	1.8	1.7	1.7	1.7	1.7	2.1	2.2	2.1	2.0	2.1

Note: With **HI** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-HI-40/1400 w/ FS/FLS TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	1.0	0.9	1.0	1.0	0.6	1.0	0.2	0.2	0.2	0.2	0.2
		1.5 ft	38.2	41.9	38.2	34.9	32.9	34.9	19.1	20.5	19.1	17.8	16.3
		2.5 ft	39.1	44.5	39.1	35.2	38.3	35.2	27.2	30.6	27.2	25.0	26.3
		3.5 ft	26.3	29.3	26.3	23.8	26.8	23.8	22.7	25.8	22.7	20.8	23.3
		4.5 ft	16.2	17.6	16.2	15.0	16.6	15.0	16.0	17.9	16.0	14.8	16.7
		5.5 ft	10.2	10.8	10.2	9.6	10.4	9.6	10.9	11.9	10.9	10.2	11.3
		6.5 ft	6.6	6.9	6.6	6.3	6.7	6.3	7.5	8.0	7.5	7.1	7.7
		7.5 ft	4.5	4.7	4.5	4.3	4.5	4.3	5.2	5.5	5.2	5.0	5.4
		8.5 ft	3.2	3.3	3.2	3.1	3.2	3.1	3.7	3.9	3.7	3.6	3.8
		9.5 ft	2.3	2.4	2.3	2.2	2.3	2.2	2.8	2.9	2.8	2.7	2.8

Note: With **HI** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-HI-2-10-FL/1000 w/ FS/FLS TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	1.0	1.2	1.0	0.9	0.9	0.9	0.3	0.3	0.3	0.3	0.2
		1.5 ft	22.6	25.4	22.6	20.4	21.1	20.4	10.8	12.0	10.8	10.0	10.2
		2.5 ft	23.6	26.5	23.6	21.2	23.9	21.2	16.5	18.6	16.5	15.1	16.7
		3.5 ft	15.8	17.3	15.8	14.5	16.2	14.5	13.7	15.2	13.7	12.6	14.2
		4.5 ft	9.8	10.5	9.8	9.2	10.1	9.2	9.7	10.5	9.7	9.0	10.1
		5.5 ft	6.2	6.5	6.2	5.9	6.3	5.9	6.6	7.0	6.6	6.3	6.8
		6.5 ft	4.1	4.2	4.1	3.9	4.1	3.9	4.5	4.8	4.5	4.4	4.7
		7.5 ft	2.8	2.8	2.8	2.7	2.8	2.7	3.2	3.3	3.2	3.1	3.3
		8.5 ft	1.9	2.0	1.9	1.9	2.0	1.9	2.3	2.4	2.3	2.2	2.3
		9.5 ft	1.4	1.4	1.4	1.4	1.4	1.4	1.7	1.7	1.7	1.7	1.7

Note: With **HI-2** LED option, use 10° optic + **FL** lens and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-HI-3-40/350 w/ FS/FLS TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.3	0.3	0.3	0.3	0.2	0.3	0.1	0.1	0.1	0.1	0.1
		1.5 ft	20.9	23.2	20.9	19.0	18.6	19.0	8.6	0.4	9.6	8.9	8.6
		2.5 ft	26.4	30.6	26.4	23.5	27.2	23.5	16.8	19.4	16.8	15.4	17.0
		3.5 ft	20.0	22.1	20.0	18.1	20.7	18.0	16.1	18.4	16.1	14.6	17.1
		4.5 ft	12.8	13.7	12.8	11.9	13.1	11.9	12.3	13.5	12.3	11.3	12.9
		5.5 ft	8.1	8.5	8.1	7.6	8.2	7.6	8.6	9.2	8.6	8.1	8.9
		6.5 ft	5.2	5.4	5.2	5.0	5.3	5.0	5.9	6.2	5.9	5.6	6.1
		7.5 ft	3.6	3.6	3.6	3.4	3.6	3.4	4.1	4.3	4.1	4.0	4.2
		8.5 ft	2.5	2.5	2.5	2.4	2.5	2.5	3.0	3.1	3.0	2.9	3.0
		9.5 ft	1.8	1.9	1.8	1.8	1.9	1.8	2.2	2.2	2.2	2.1	2.2

Note: With **HI-3** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-WD-40/350 w/ FS/FLS TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.6	0.7	0.6	0.6	0.4	0.6	0.1	0.1	0.1	0.1	0.1
		1.5 ft	20.8	23.2	20.8	19.0	18.2	19.0	10.0	11.0	10.0	9.3	8.8
		2.5 ft	23.4	27.2	23.4	21.0	23.2	21.0	15.6	17.9	15.6	14.3	15.3
		3.5 ft	16.8	19.1	16.8	15.1	17.3	15.1	13.9	16.1	13.9	12.7	14.5
		4.5 ft	10.7	11.8	10.7	9.9	11.1	9.9	10.3	11.7	10.3	9.5	10.8
		5.5 ft	6.8	7.3	6.8	6.4	7.0	6.4	7.2	7.9	7.2	6.7	7.5
		6.5 ft	4.5	4.7	4.5	4.3	4.6	4.3	5.0	5.4	5.0	4.7	5.2
		7.5 ft	3.0	3.2	3.0	2.9	3.1	2.9	3.5	3.7	3.5	3.4	3.6
		8.5 ft	2.1	2.2	2.1	2.1	2.2	2.1	2.5	2.7	2.5	2.5	2.6
		9.5 ft	1.6	1.6	1.6	1.5	1.6	1.5	1.9	2.0	1.9	1.8	1.9

Note: With **WD**, **WD-2**, or **WD-4** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-TW-40/700 w/ FS/FLS TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.2	0.2	0.2	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.1
		1.5 ft	19.8	22.1	19.8	18.0	17.9	18.0	8.9	9.8	8.9	8.2	8.1
		2.5 ft	24.8	28.5	24.8	22.0	25.5	22.0	15.8	18.2	15.8	14.4	16.1
		3.5 ft	18.5	20.4	18.5	16.7	19.1	16.7	15.0	17.1	15.0	13.6	15.9
		4.5 ft	11.8	12.6	11.8	11.0	12.1	11.0	11.3	12.5	11.3	10.5	11.9
		5.5 ft	7.4	7.8	7.4	7.1	7.6	7.1	7.9	8.5	7.9	7.5	8.2
		6.5 ft	4.9	5.0	4.9	4.7	4.9	4.7	5.5	5.7	5.5	5.2	5.6
		7.5 ft	3.3	3.4	3.3	3.2	3.3	3.2	3.8	4.0	3.8	3.7	3.9
		8.5 ft	2.3	2.4	2.3	2.3	2.3	2.3	2.8	2.8	2.8	2.7	2.8
		9.5 ft	1.7	1.7	1.7	1.6	1.7	1.6	2.0	2.1	2.0	2.0	2.1

Note: With **TW** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-HI-40/1000 w/ FR/FLR TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.7	0.6	0.7	0.6	0.4	0.6	0.1	0.1	0.1	0.1	0.1
		1.5 ft	27.5	31.2	27.5	24.9	24.7	24.9	13.5	15.1	13.5	12.6	12.0
		2.5 ft	29.1	33.6	29.1	26.1	28.9	26.1	19.9	22.8	19.9	18.2	19.7
		3.5 ft	20.1	22.7	20.1	18.1	20.8	18.1	17.0	19.6	17.0	15.6	17.7
		4.5 ft	12.6	13.8	12.6	11.6	13.1	11.6	12.3	13.9	12.3	11.3	13.0
		5.5 ft	7.9	8.5	7.9	7.4	8.2	7.4	8.4	9.3	8.4	7.9	8.9
		6.5 ft	5.2	5.5	5.2	4.9	5.3	4.9	5.8	6.3	5.8	5.5	6.1
		7.5 ft	3.5	3.7	3.5	3.4	3.6	3.4	4.1	4.3	4.1	3.9	4.2
		8.5 ft	2.5	2.6	2.5	2.4	2.5	2.4	2.9	3.1	2.9	2.8	3.0
		9.5 ft	1.8	1.8	1.8	1.7	1.8	1.7	2.2	2.3	2.2	2.1	2.2

Note: With **HI** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-HI-40/1400 w/ FR/FLR TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.9	0.7	0.9	0.9	0.5	0.9	0.2	0.2	0.2	0.2	0.1
		1.5 ft	35.8	40.5	35.8	32.4	32.0	32.4	17.6	19.6	17.6	16.3	15.7
		2.5 ft	37.8	43.6	37.8	34.0	37.6	34.0	25.9	29.7	25.9	23.7	25.6
		3.5 ft	26.1	29.6	26.1	23.6	27.0	23.6	22.2	25.5	22.2	20.3	23.0
		4.5 ft	16.4	18.0	16.4	15.1	17.0	15.1	16.0	18.0	16.0	14.8	16.9
		5.5 ft	10.3	11.1	10.3	9.7	10.6	9.7	11.0	12.1	11.0	10.3	11.5
		6.5 ft	6.7	7.1	6.7	6.4	6.9	6.9	7.6	8.2	7.6	7.2	7.9
		7.5 ft	4.6	4.8	4.6	4.4	4.7	4.4	5.3	5.6	5.3	5.1	5.5
		8.5 ft	3.2	3.3	3.2	3.1	3.3	3.1	3.8	4.0	3.8	3.7	3.9
		9.5 ft	2.3	2.4	2.3	2.3	2.4	2.3	2.8	2.9	2.8	2.7	2.9


Note: With **HI** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-HI-2-10-FL/1000 w/ FR/FLR TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	1.1	0.8	1.1	1.0	0.7	1.0	0.3	0.3	0.3	0.3	0.2
		1.5 ft	20.0	21.7	20.0	18.2	17.6	18.2	9.5	9.9	9.5	8.8	8.3
		2.5 ft	21.5	23.9	21.5	19.3	21.4	19.3	14.8	16.5	14.8	13.5	14.7
		3.5 ft	14.8	16.1	14.8	13.5	15.0	13.5	12.6	13.9	12.6	11.6	12.9
		4.5 ft	9.3	10.0	9.3	8.7	9.5	8.7	9.0	9.9	9.0	8.4	9.3
		5.5 ft	6.0	6.3	6.0	5.6	6.1	5.6	6.3	6.7	6.3	5.9	6.5
		6.5 ft	3.9	4.1	3.9	3.8	4.0	3.8	4.3	4.6	4.3	4.2	4.5
		7.5 ft	2.7	2.8	2.7	2.6	2.7	2.6	3.1	3.2	3.1	3.0	3.2
		8.5 ft	1.9	1.9	1.9	1.9	1.9	1.9	2.2	2.3	2.2	2.2	2.3
		9.5 ft	1.4	1.4	1.4	1.4	1.4	1.4	1.7	1.7	1.7	1.7	1.6


Note: With **HI-2** LED option, use 10° optic + **FL** lens and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-HI-3/350 w/ FR/FLR TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.3	0.2	0.3	0.3	0.2	0.3	0.1	0.1	0.1	0.1	0.1
		1.5 ft	18.6	20.1	18.6	16.8	16.2	16.8	8.4	9.0	8.4	7.8	7.4
		2.5 ft	23.8	26.5	23.8	21.3	23.0	21.3	15.0	16.6	15.0	13.7	14.5
		3.5 ft	18.3	20.3	18.3	16.5	18.5	16.5	14.5	16.2	14.5	13.2	14.6
		4.5 ft	12.1	13.2	12.1	11.1	12.5	11.1	11.3	12.5	11.3	10.4	11.7
		5.5 ft	7.8	8.3	7.8	7.4	8.0	7.4	8.1	8.8	8.1	7.6	8.4
		6.5 ft	5.2	5.4	5.2	4.9	5.3	4.9	5.7	6.1	5.7	5.4	5.9
		7.5 ft	3.5	3.6	3.5	3.4	3.6	3.4	4.1	4.3	4.1	3.9	4.2
		8.5 ft	2.5	2.5	2.5	2.4	2.5	2.4	2.9	3.1	2.9	2.8	3.0
		9.5 ft	1.8	1.8	1.8	1.8	1.8	1.8	2.2	2.2	2.2	2.1	2.2

Note: With **HI-3** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-WD-40/350 w/ FR/FLR TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.7	0.6	0.7	0.7	0.3	0.7	0.2	0.1	0.2	0.2	0.1
		1.5 ft	19.7	22.7	19.7	17.9	17.8	17.9	9.5	10.8	9.5	8.8	8.6
		2.5 ft	22.7	26.6	22.7	20.3	22.6	20.3	14.9	17.5	14.9	13.6	14.9
		3.5 ft	16.6	19.2	16.6	14.9	17.2	14.9	13.6	15.9	13.6	12.4	14.2
		4.5 ft	10.8	12.1	10.8	9.9	11.2	9.9	10.2	11.8	10.2	9.4	10.8
		5.5 ft	6.9	7.5	6.9	6.4	7.2	6.4	7.2	8.1	7.2	6.7	7.6
		6.5 ft	4.5	4.9	4.5	4.3	4.7	4.3	5.0	5.5	5.0	4.8	5.3
		7.5 ft	3.1	3.3	3.1	3.0	3.2	3.0	3.6	3.9	3.6	3.4	3.7
		8.5 ft	2.2	2.3	2.2	2.1	2.2	2.1	2.6	2.7	2.6	2.5	2.7
		9.5 ft	1.6	1.6	1.6	1.5	1.6	1.5	1.9	2.0	1.9	1.8	2.0

Note: With **WD**, **WD-2**, or **WD-4** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.

805/W5-TW-40/700 w/ FR/FLR TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft					
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.3	0.2	0.3	0.2	0.1	0.2	0.1	0.1	0.1	0.1	0.1
		1.5 ft	18.3	19.8	18.3	16.6	16.0	16.6	8.2	8.6	8.2	7.6	7.0
		2.5 ft	23.2	25.9	23.2	20.9	22.6	20.9	14.7	16.3	14.7	13.5	14.3
		3.5 ft	17.6	19.5	17.6	15.9	17.9	15.9	14.1	15.7	14.1	12.9	14.3
		4.5 ft	11.5	12.4	11.5	10.6	11.8	10.6	10.8	12.0	10.8	10.0	11.2
		5.5 ft	7.4	7.8	7.4	6.9	7.6	6.9	7.7	8.3	7.7	7.2	8.0
		6.5 ft	4.9	5.1	4.9	4.6	4.9	4.6	5.4	5.7	5.4	5.1	5.6
		7.5 ft	3.3	3.4	3.3	3.2	3.3	3.2	3.8	4.0	3.8	3.7	3.9
		8.5 ft	2.3	2.4	2.3	2.3	2.3	2.3	2.8	2.9	2.8	2.7	2.8
		9.5 ft	1.7	1.7	1.7	1.6	1.7	1.6	2.0	2.1	2.0	2.0	2.1

Note: With **TW** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for individual lamp modules at 3000K CCT. Output varies by CCT.