

## Photometric / Colorimetric / Electric Report

Fixture Model:


**804S-J2S-TW-40-4500K-EL3-8-700-FS-LG-P-1-WH-NL**

Trim Model:

**FS-LG-P-1-WH/NL**

Date:

**7/30/2020**

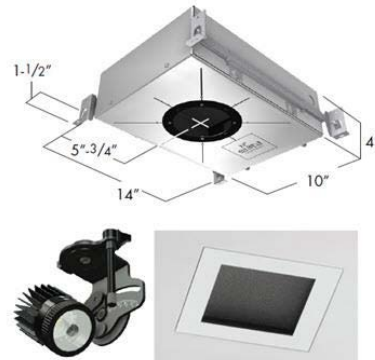

Light efficiency:

**65 Lumen/Watt**

Light quality:

**CRI: 91.9**

Color temperature:

**4538 K**

CIE 1931:

**x: 0.360  
y: 0.366**


**Output: 957 lm**

**Peak: 1866 cd**



**Power: 14.7 W**

**PF: 0.99**


Spectra:

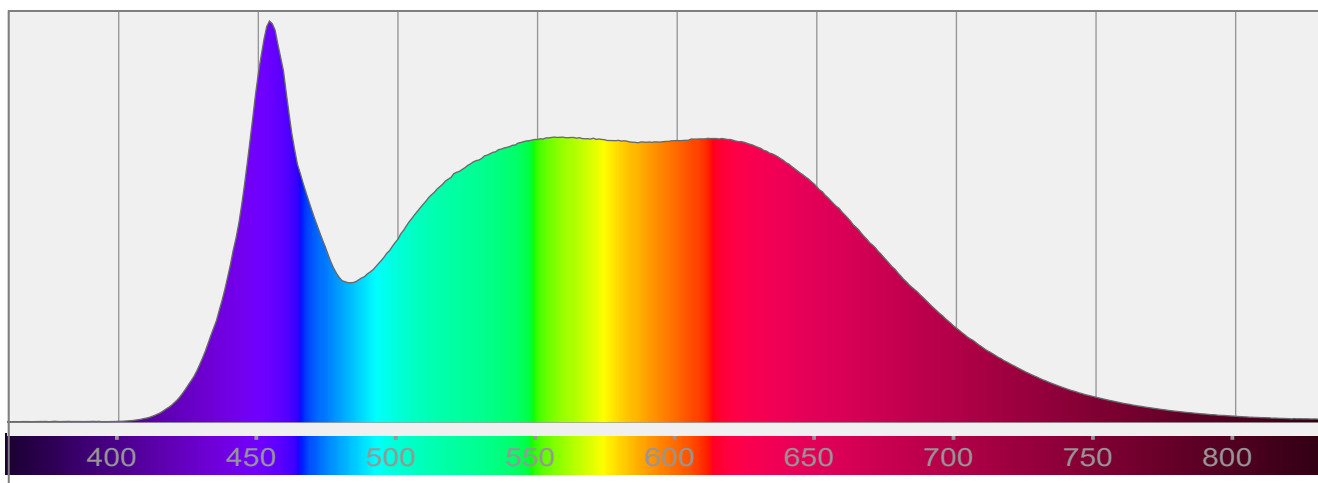


## Color Details

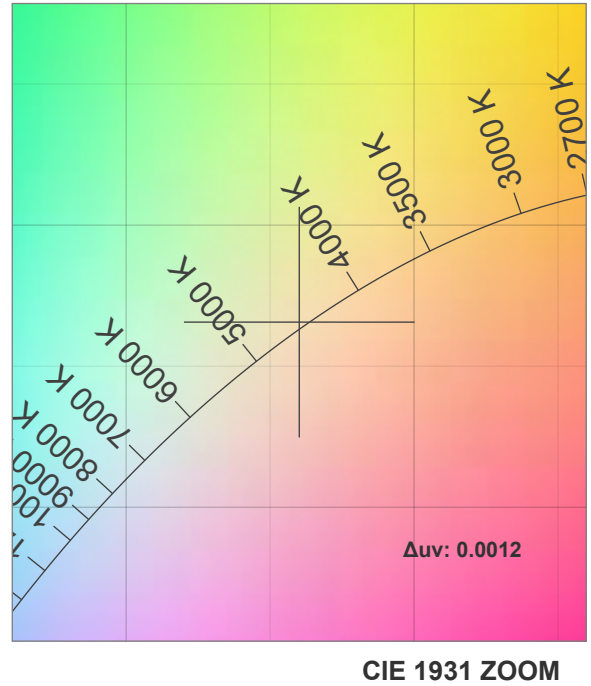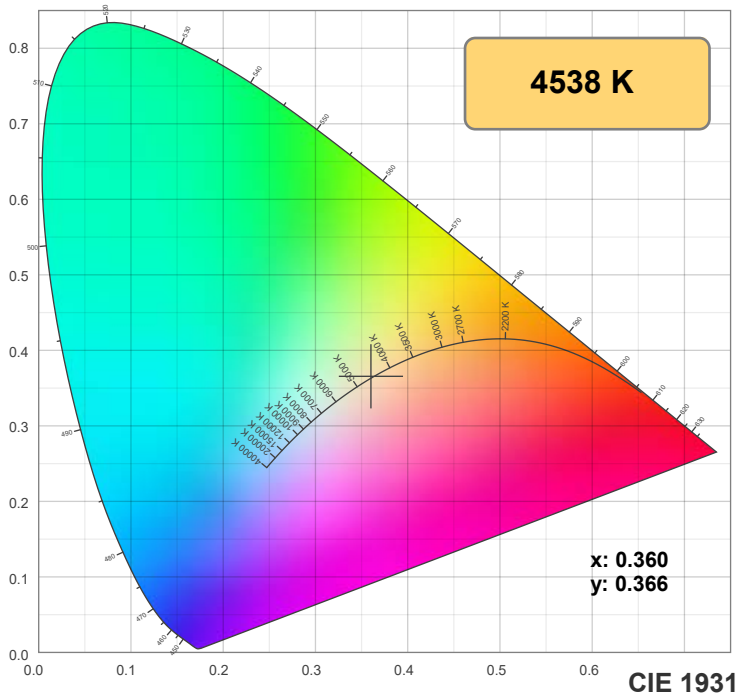

**TM-30: 89.7**

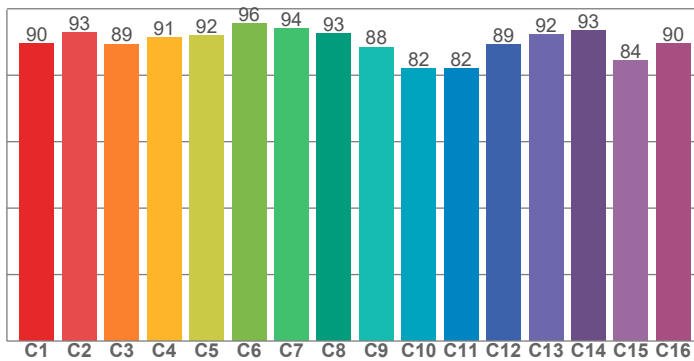

**CRI: 91.9 (R1-R8)**

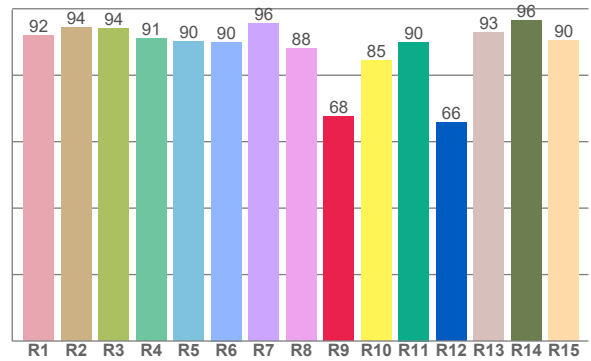

**CRI R Values:**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.1	94.4	94.0	91.2	90.2	90.0	95.6	88.0	67.6	84.6	90.0	65.9	92.8	96.4	90.4


**TM30 C Values:**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89.5	92.8	89.4	91.3	92.0	95.6	94.1	92.6	88.5	82.0	82.0	89.1	92.2	93.4	84.4	89.6

**CQS Q values:**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91.6	98.8	84.4	81.5	86.3	88.8	92.2	94.7	97.1	93.4	92.1	93.1	93.9	90.4	91.4

**CQS: 90.3**

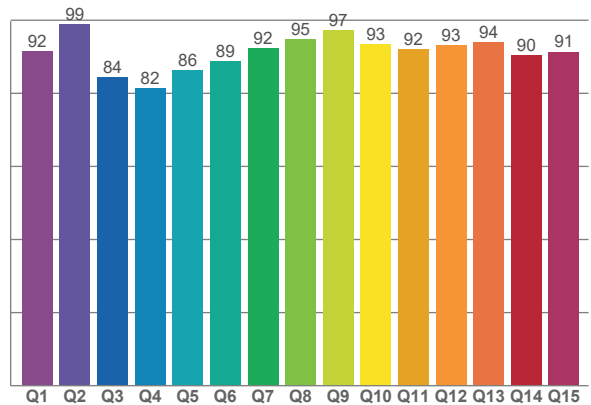

**Color Parameters:**

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4538 K	91.9	67.6	89.7	98.5	90.3	0.360	0.366	0.216	0.329	0.0012

# TM-30 Details







**Rf 89.7**

Fidelity index Rf


**Rg 98.5**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	90	-5%	0%
2	93	-3%	2%
3	89	-2%	5%
4	91	-1%	3%
5	92	-2%	2%
6	96	0%	0%
7	94	-3%	-1%
8	93	-4%	2%
9	88	-5%	7%
10	82	-3%	11%
11	82	3%	11%
12	89	4%	5%
13	92	6%	-2%
14	93	2%	-2%
15	84	6%	-12%
16	90	-2%	-5%

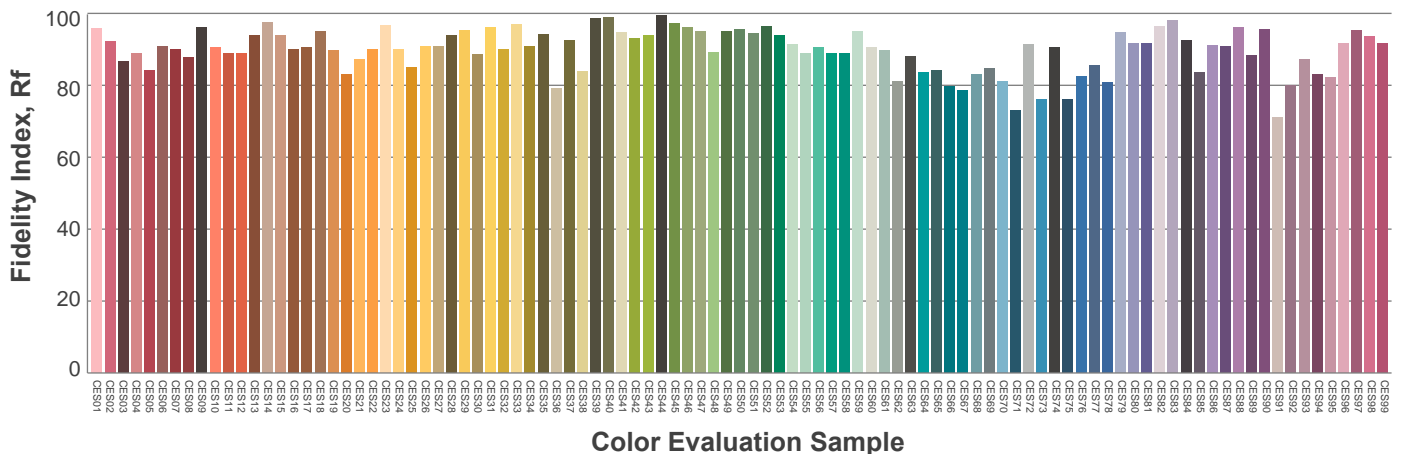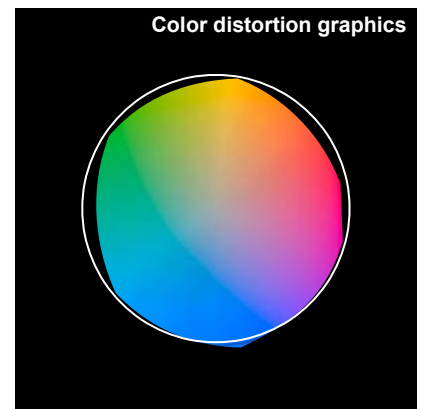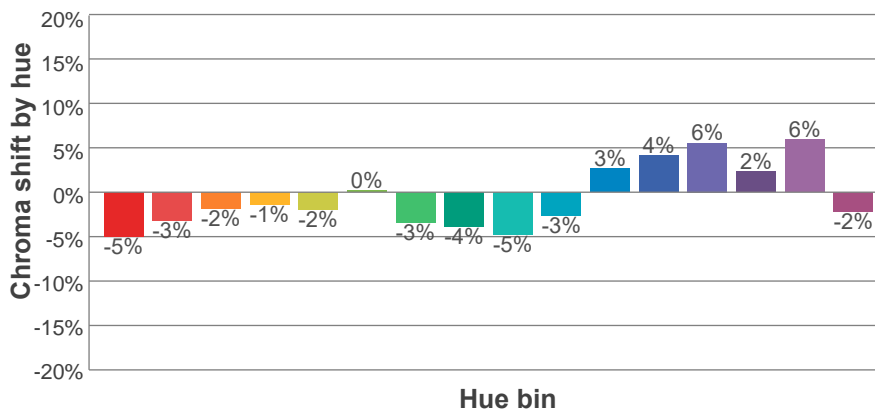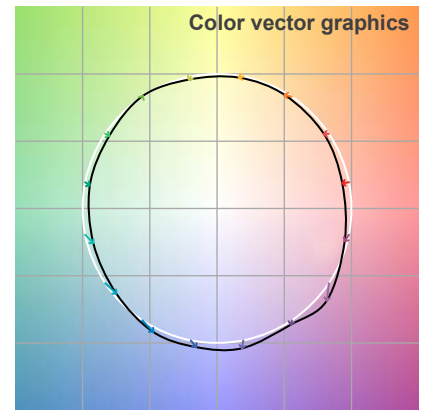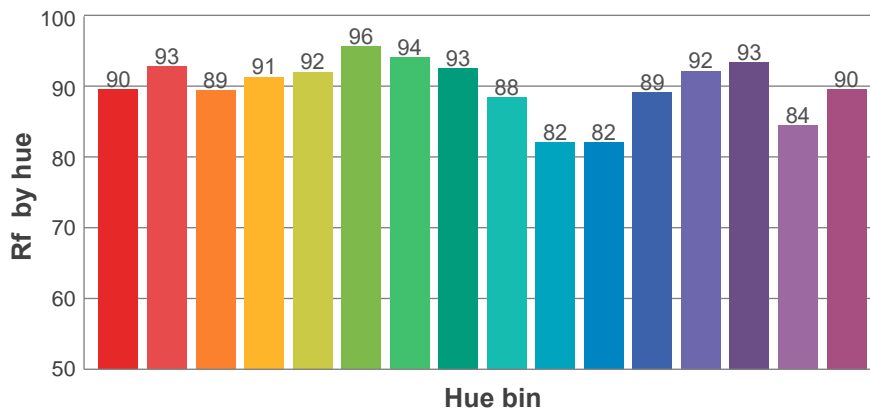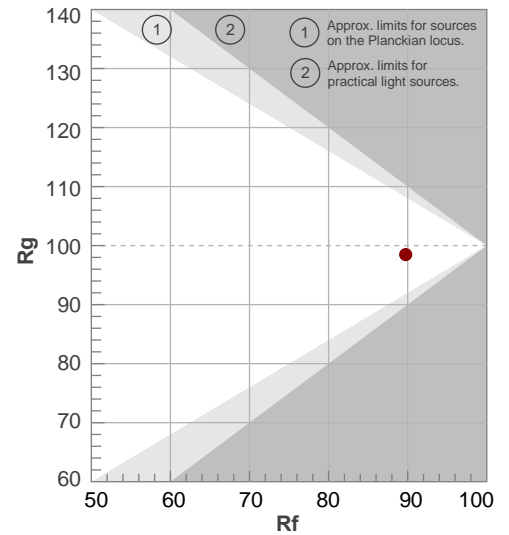

## Beam Details

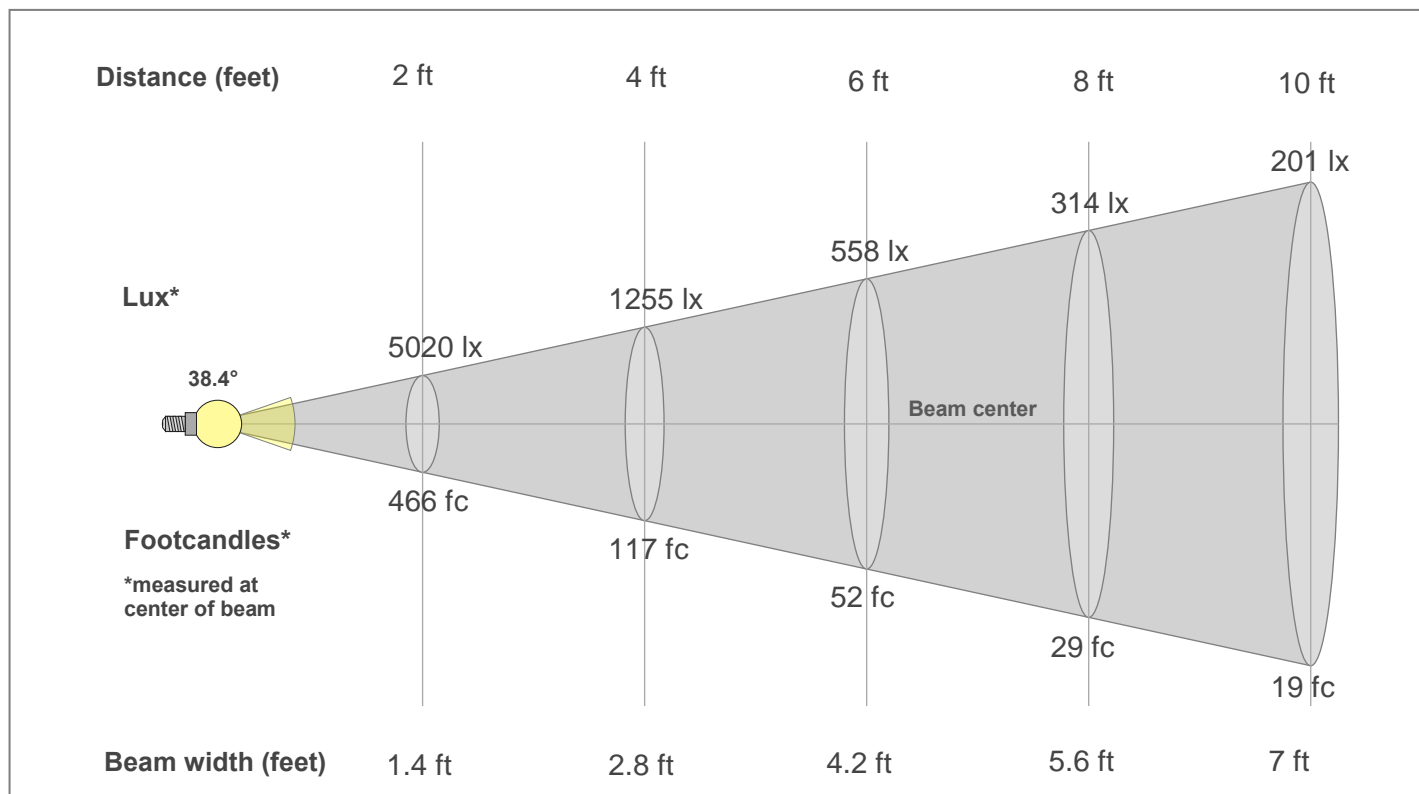

### Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1866lx	466lx	207lx	117lx	75lx	52lx	38lx	29lx	23lx	19lx	15lx	13lx	11lx	10lx	8lx	7lx	6lx	6lx	5lx	5lx
173.3fc	43.3fc	19.3fc	10.8fc	6.9fc	4.8fc	3.5fc	2.7fc	2.1fc	1.7fc	1.4fc	1.2fc	1fc	0.9fc	0.8fc	0.7fc	0.6fc	0.5fc	0.5fc	0.4fc

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1866	1854	1813	1747	1657	1550	1430	1301	1160	1016	877	748	628	523	435	360	296	239	190	148
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	34%	28%	23%	19%	16%	13%	10%	8%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1866	1854	1813	1747	1657	1550	1430	1301	1160	1016	877	748	628	523	435	360	296	239	190	148
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	34%	28%	23%	19%	16%	13%	10%	8%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1866	1854	1813	1747	1657	1550	1430	1301	1160	1016	877	748	628	523	435	360	296	239	190	148
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	34%	28%	23%	19%	16%	13%	10%	8%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1866	1854	1813	1747	1657	1550	1430	1301	1160	1016	877	748	628	523	435	360	296	239	190	148
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	34%	28%	23%	19%	16%	13%	10%	8%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
38.4°	72.3°	91.8°	99.8%	97.2%