

Photometric / Colorimetric / Electric Report

Fixture Model:


804S-J2S-TW-40-3000K-EL3-8-700-FS-LG-P-1-WH-NL

Trim Model:

FS-LG-P-1-WH/NL

Date:

7/30/2020

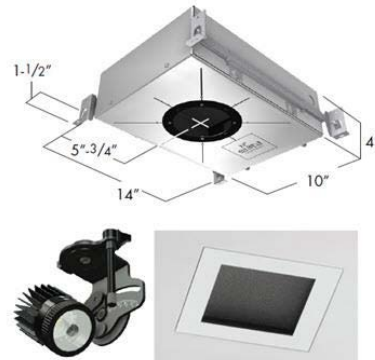

Light efficiency:

61 Lumen/Watt

Light quality:

CRI: 95.6

Color temperature:

3013 K

CIE 1931:

**x: 0.429
y: 0.389**


Output: 873 lm

Peak: 1708 cd



Power: 14.3 W

PF: 0.99


Spectra:

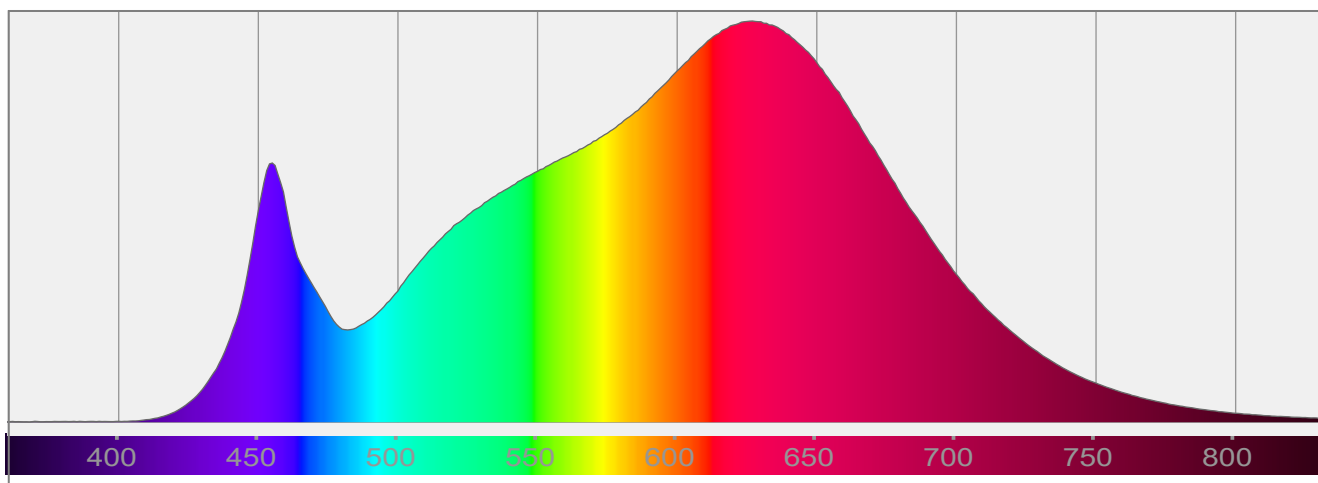


Color Details

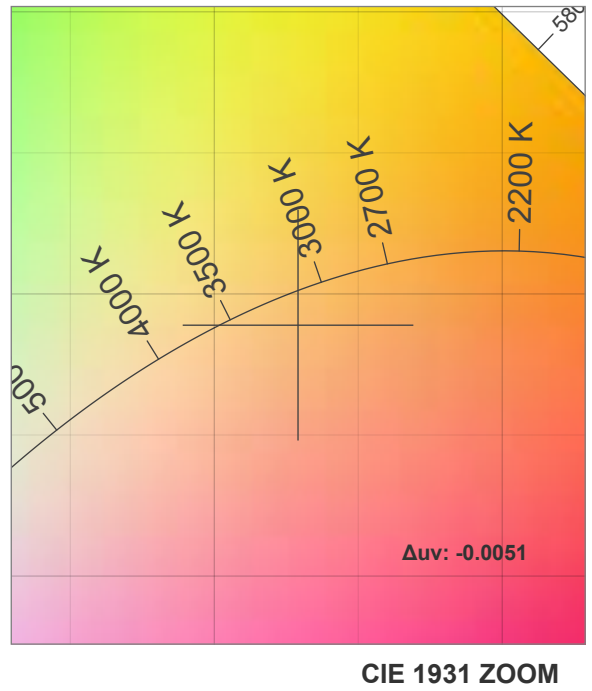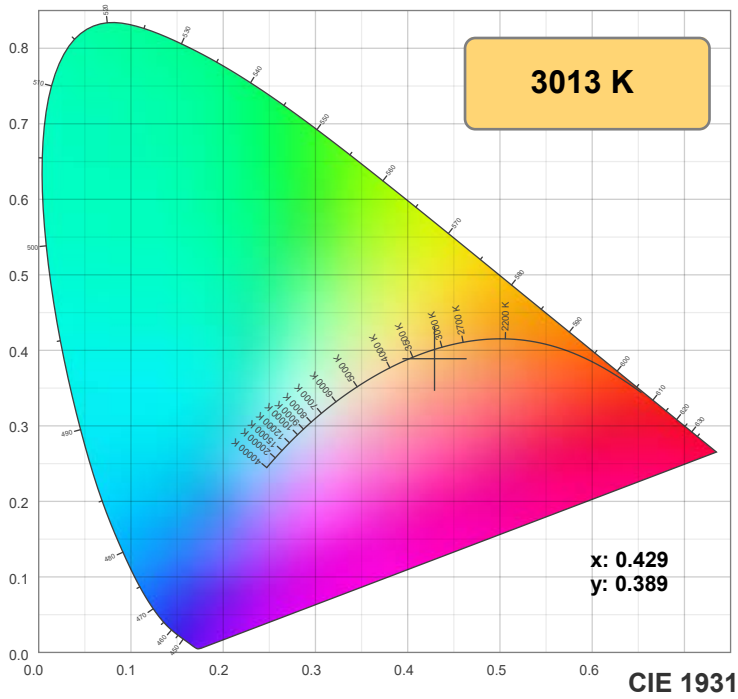

TM-30: 92.0

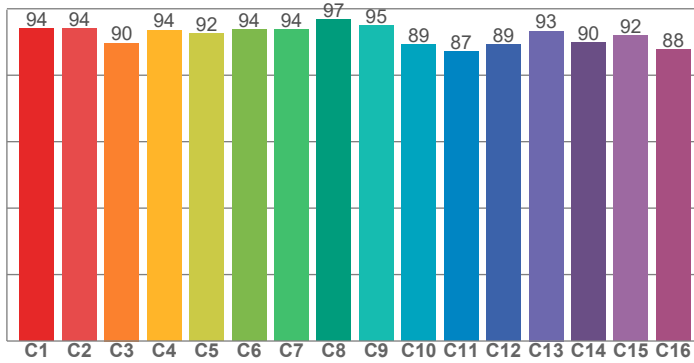

CRI: 95.6 (R1-R8)

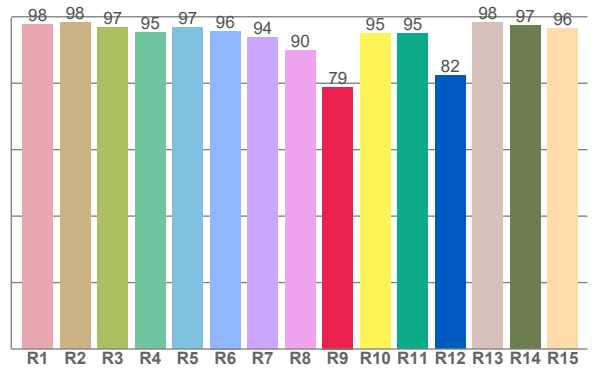

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.6	98.4	96.8	95.4	96.9	95.7	93.8	89.9	78.9	94.9	95.0	82.4	98.3	97.4	96.4


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93.9	94.0	89.7	93.6	92.4	93.8	93.7	96.7	94.9	89.2	87.0	89.2	93.3	89.8	92.0	87.7

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.8	97.3	85.8	86.1	91.6	92.9	88.2	91.2	97.1	92.2	91.2	91.2	92.1	91.9	92.1

CQS: 90.9

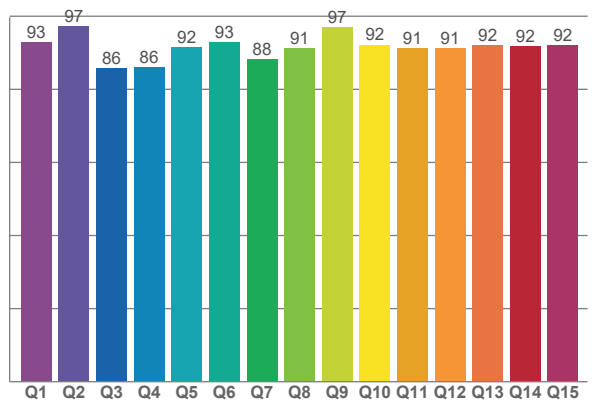

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3013 K	95.6	78.9	92.0	102.1	90.9	0.429	0.389	0.252	0.343	-0.0051

TM-30 Details







Rf 92.0

Fidelity index Rf


Rg 102.1

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	94	-3%	0%
2	94	-2%	3%
3	90	0%	5%
4	94	1%	3%
5	92	0%	2%
6	94	4%	0%
7	94	0%	-1%
8	97	0%	-2%
9	95	-1%	3%
10	89	-1%	7%
11	87	2%	10%
12	89	6%	3%
13	93	4%	-3%
14	90	6%	-6%
15	92	1%	-5%
16	88	1%	-10%

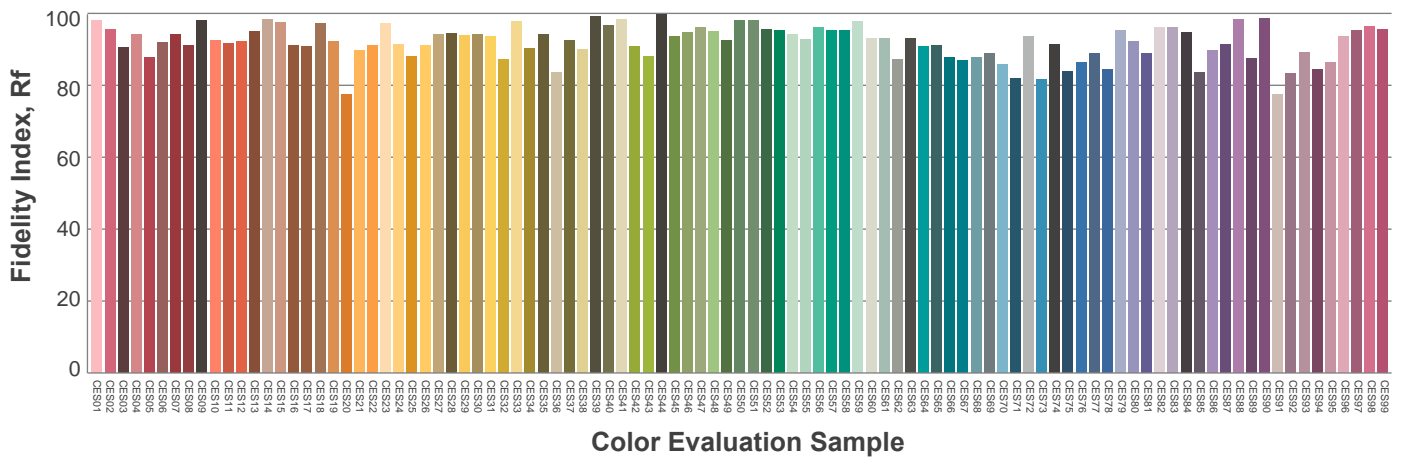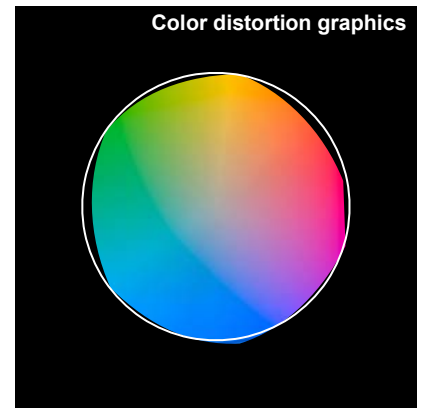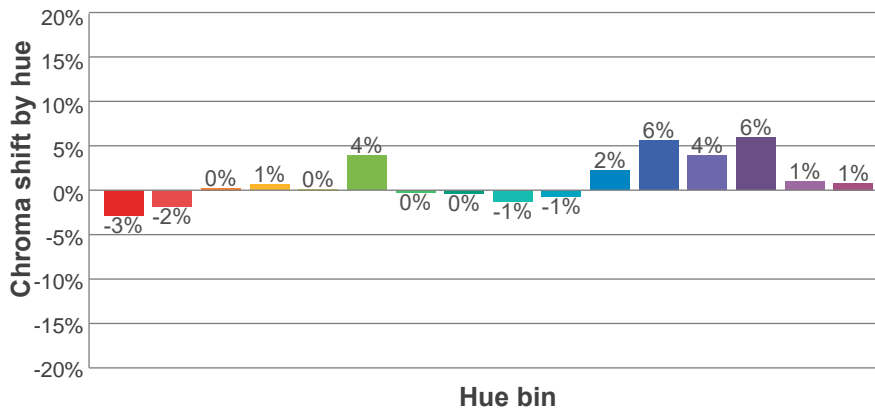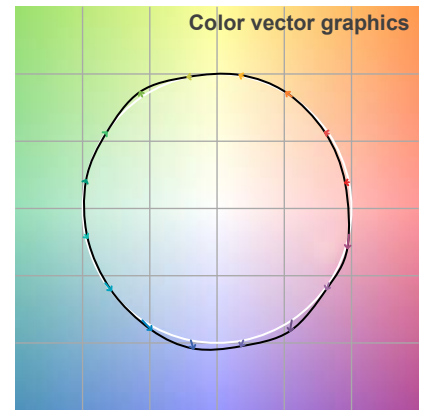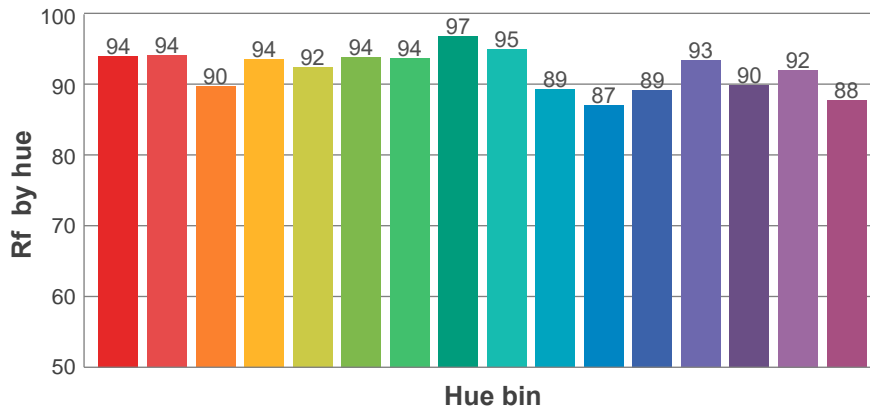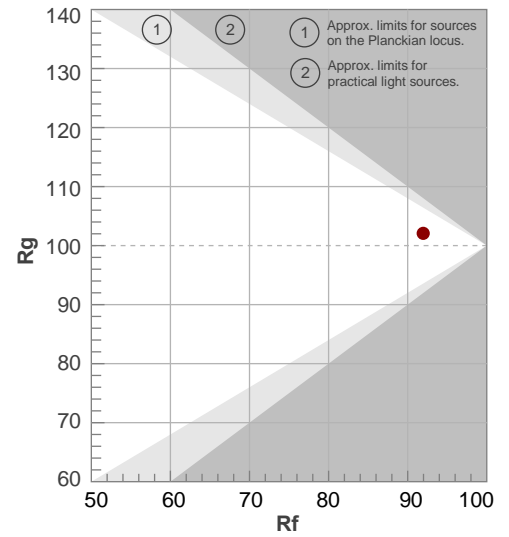

Beam Details

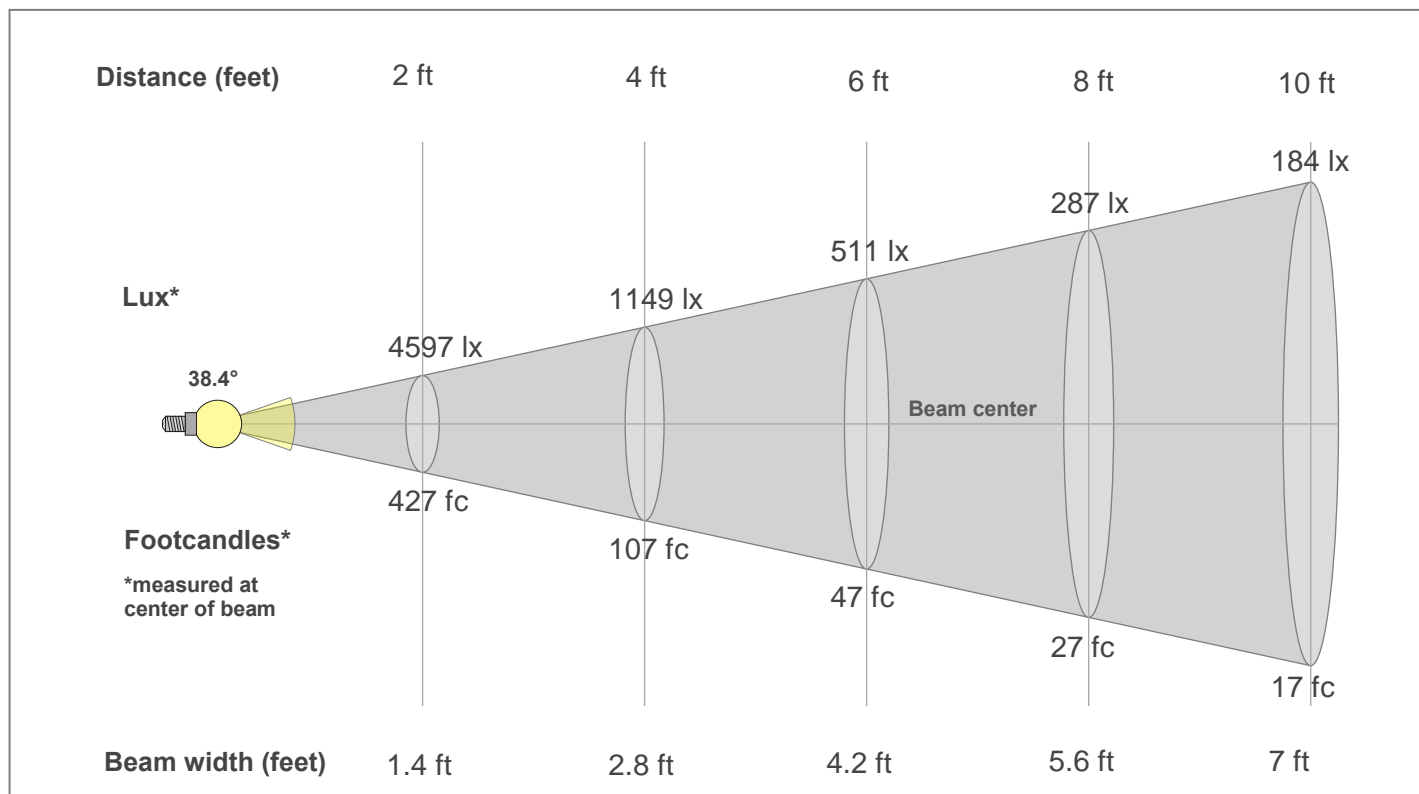

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1708lx	427lx	190lx	107lx	68lx	47lx	35lx	27lx	21lx	17lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	5lx	5lx	4lx
158.7fc	39.7fc	17.6fc	9.9fc	6.3fc	4.4fc	3.2fc	2.5fc	2fc	1.6fc	1.3fc	1.1fc	0.9fc	0.8fc	0.7fc	0.6fc	0.5fc	0.5fc	0.4fc	0.4fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1708	1697	1661	1601	1519	1420	1309	1189	1060	930	803	683	575	479	397	327	268	216	172	133
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	34%	28%	23%	19%	16%	13%	10%	8%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1708	1697	1661	1601	1519	1420	1309	1189	1060	930	803	683	575	479	397	327	268	216	172	133
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	34%	28%	23%	19%	16%	13%	10%	8%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1708	1697	1661	1601	1519	1420	1309	1189	1060	930	803	683	575	479	397	327	268	216	172	133
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	34%	28%	23%	19%	16%	13%	10%	8%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1708	1697	1661	1601	1519	1420	1309	1189	1060	930	803	683	575	479	397	327	268	216	172	133
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	34%	28%	23%	19%	16%	13%	10%	8%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
38.4°	72.1°	91.6°	99.8%	97.3%