

Photometric / Colorimetric / Electric Report

Fixture Model:


804S-J2S-TW-25-4500K-EL3-8-700-FS-LG-P-1-WH-NL

Trim Model:

FS-LG-P-1-WH/NL

Date:

7/30/2020

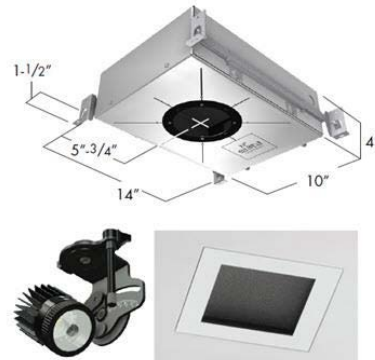

Light efficiency:

60 Lumen/Watt

Light quality:

CRI: 91.9

Color temperature:

4557 K

CIE 1931:

**x: 0.359
y: 0.365**


Output: 884 lm

Peak: 2679 cd



Power: 14.7 W

PF: 0.99


Spectra:

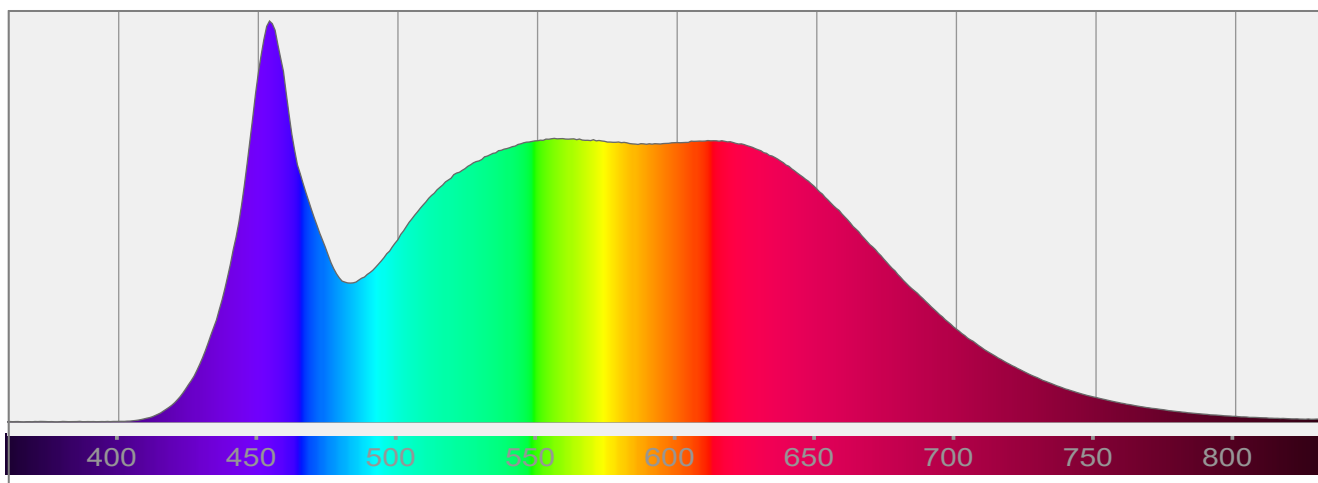


Color Details

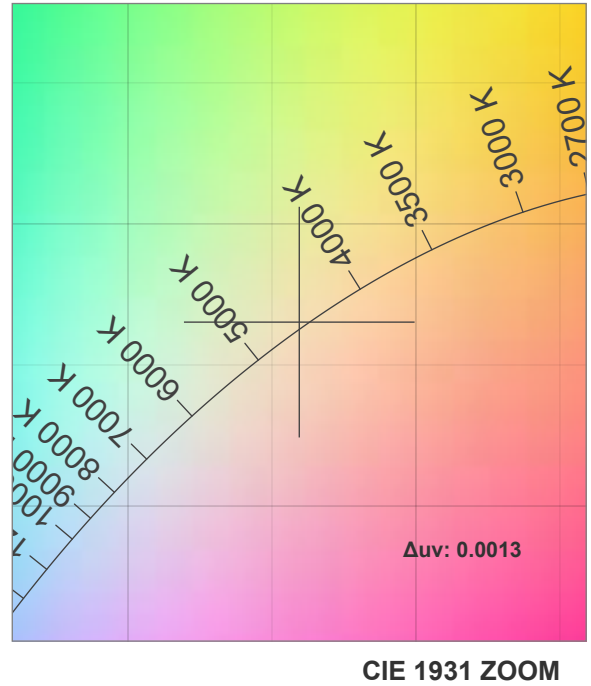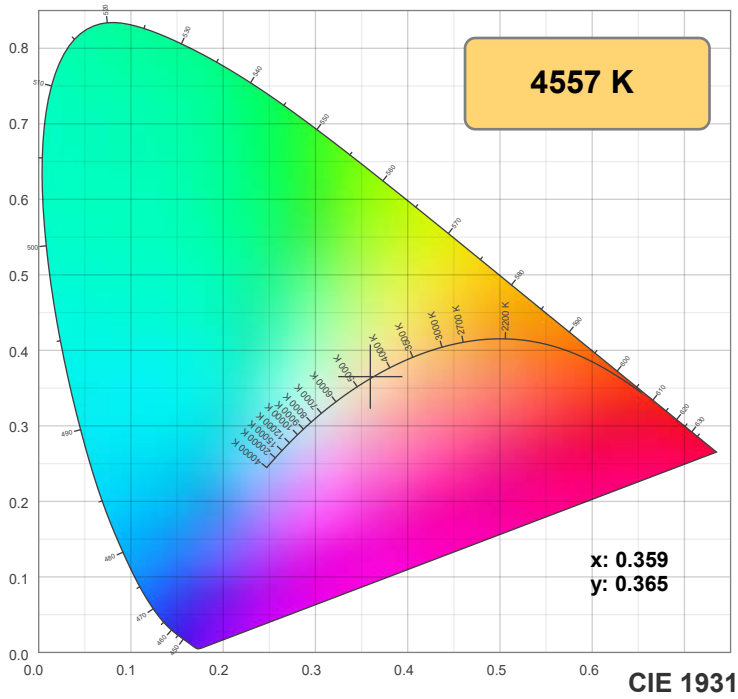

TM-30: 89.7

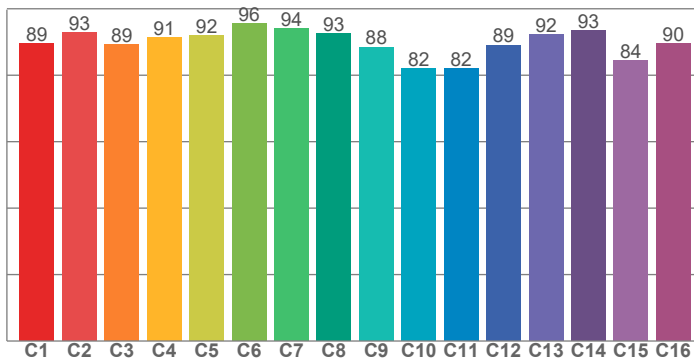

CRI: 91.9 (R1-R8)

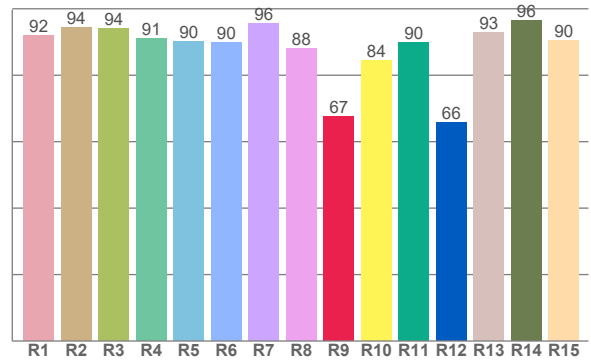

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.0	94.4	94.0	91.1	90.2	90.0	95.6	88.0	67.5	84.5	90.0	65.8	92.8	96.4	90.3


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89.5	92.8	89.3	91.3	92.0	95.6	94.1	92.6	88.5	82.0	82.0	89.1	92.2	93.4	84.4	89.5

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91.6	98.8	84.4	81.4	86.3	88.8	92.2	94.7	97.1	93.4	92.1	93.1	93.8	90.4	91.3

CQS: 90.2

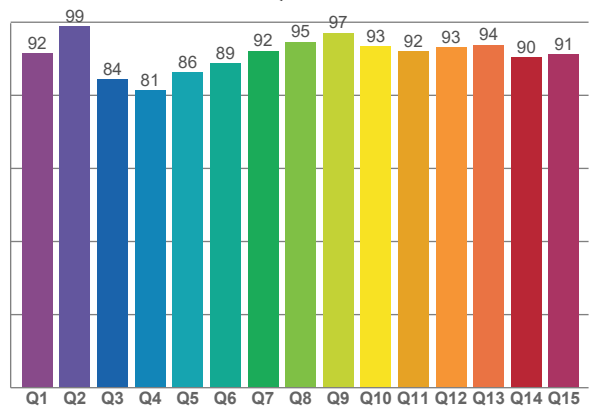

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4557 K	91.9	67.5	89.7	98.5	90.2	0.359	0.365	0.216	0.329	0.0013

TM-30 Details







Rf 89.7

Fidelity index Rf


Rg 98.5

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	89	-5%	0%
2	93	-3%	2%
3	89	-2%	5%
4	91	-1%	3%
5	92	-2%	2%
6	96	0%	0%
7	94	-3%	-1%
8	93	-4%	2%
9	88	-5%	7%
10	82	-3%	11%
11	82	3%	11%
12	89	4%	5%
13	92	6%	-2%
14	93	2%	-2%
15	84	6%	-12%
16	90	-2%	-5%

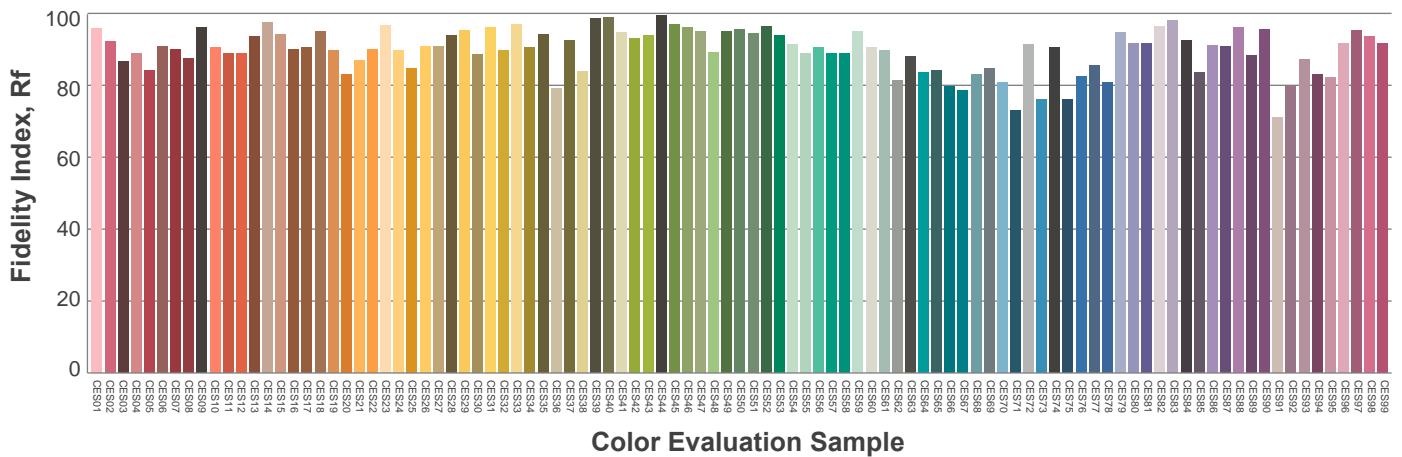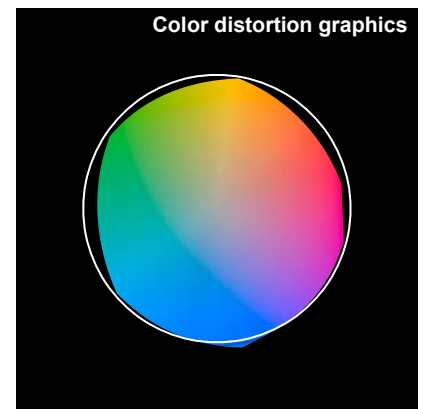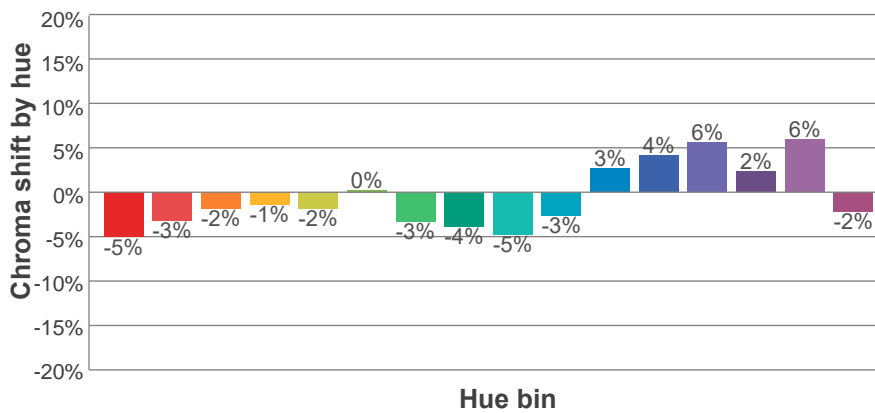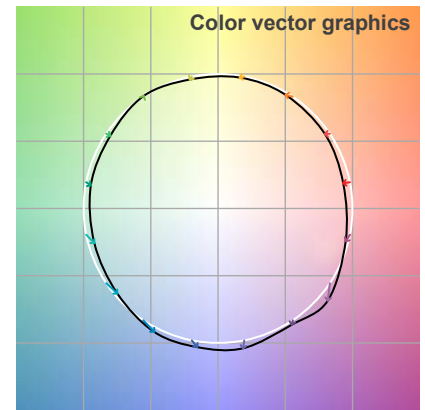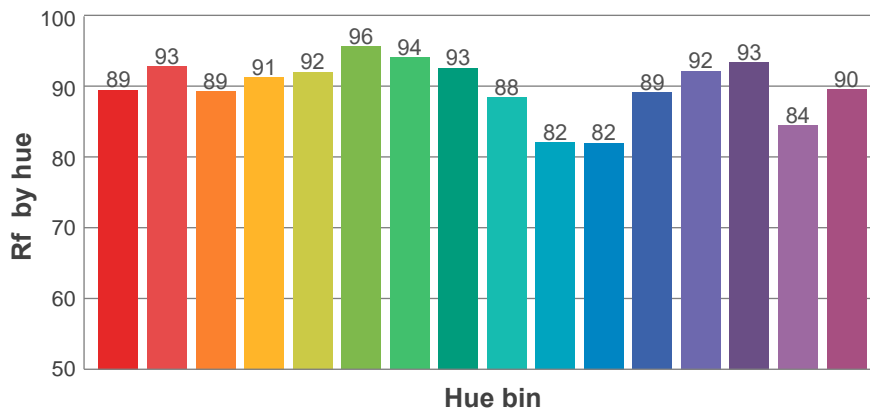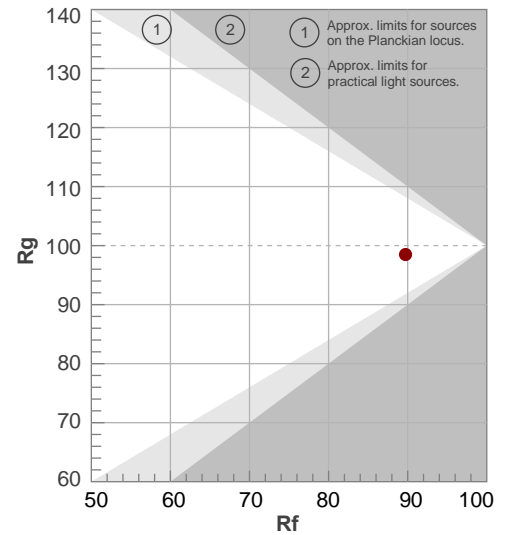

Beam Details

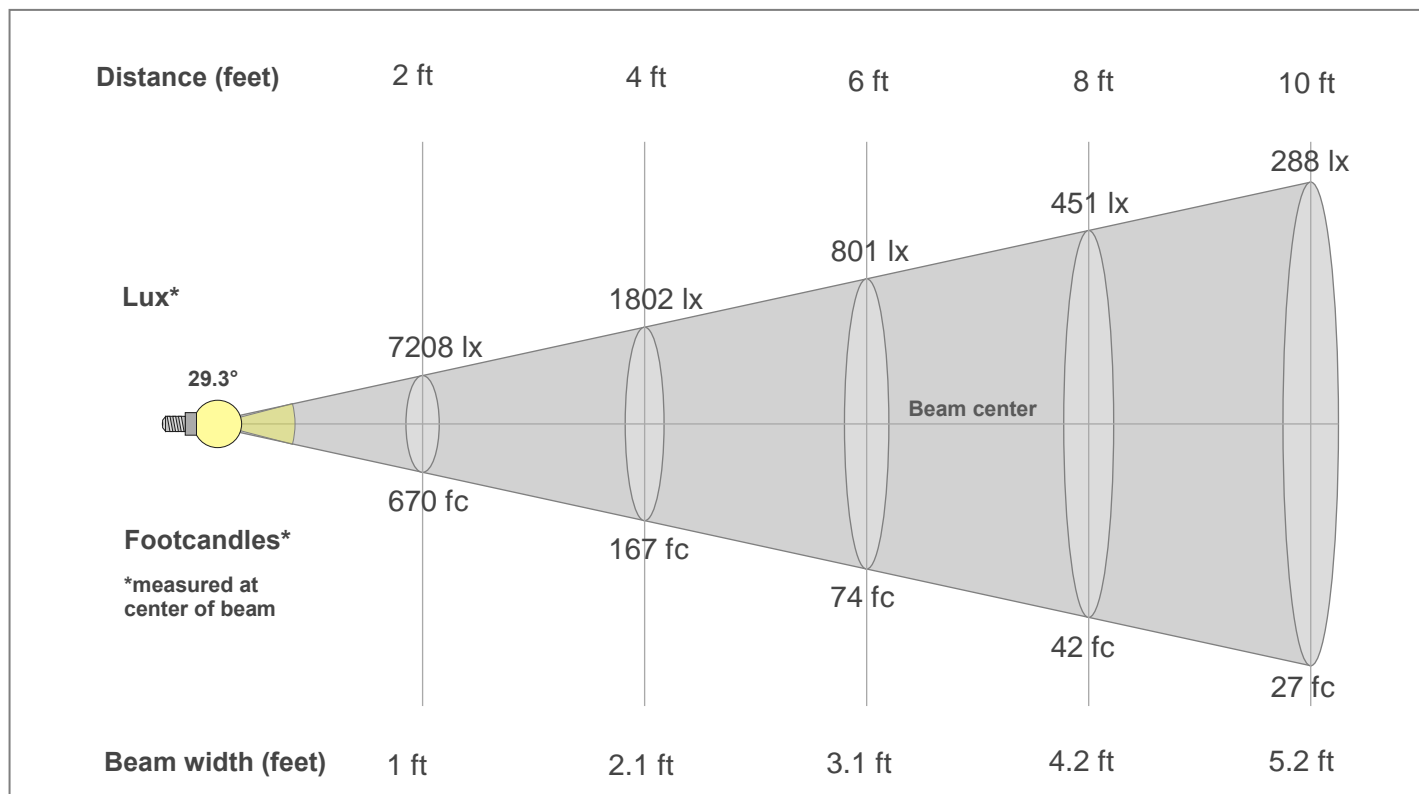

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2679lx	670lx	298lx	167lx	107lx	74lx	55lx	42lx	33lx	27lx	22lx	19lx	16lx	14lx	12lx	10lx	9lx	8lx	7lx	7lx
248.9fc	62.2fc	27.7fc	15.6fc	10fc	6.9fc	5.1fc	3.9fc	3.1fc	2.5fc	2.1fc	1.7fc	1.5fc	1.3fc	1.1fc	1fc	0.9fc	0.8fc	0.7fc	0.6fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2679	2639	2530	2365	2157	1921	1669	1417	1177	958	770	610	475	369	292	233	188	153	123	95
100%	99%	94%	88%	81%	72%	62%	53%	44%	36%	29%	23%	18%	14%	11%	9%	7%	6%	5%	4%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2679	2639	2530	2365	2157	1921	1669	1417	1177	958	770	610	475	369	292	233	188	153	123	95
100%	99%	94%	88%	81%	72%	62%	53%	44%	36%	29%	23%	18%	14%	11%	9%	7%	6%	5%	4%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2679	2639	2530	2365	2157	1921	1669	1417	1177	958	770	610	475	369	292	233	188	153	123	95
100%	99%	94%	88%	81%	72%	62%	53%	44%	36%	29%	23%	18%	14%	11%	9%	7%	6%	5%	4%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2679	2639	2530	2365	2157	1921	1669	1417	1177	958	770	610	475	369	292	233	188	153	123	95
100%	99%	94%	88%	81%	72%	62%	53%	44%	36%	29%	23%	18%	14%	11%	9%	7%	6%	5%	4%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
29.3°	57.5°	80.2°	99.8%	98.7%