

## Photometric / Colorimetric / Electric Report

Fixture Model:


**804S-J2S-TW-40-4000K-EL3-8-700-FS-P-1-WH**

Trim Model:

**FS-P-1-WH**

Date:

**7/30/2020**

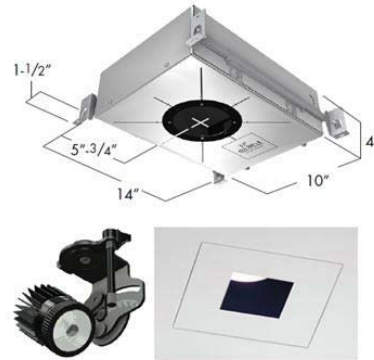

Light efficiency:

**57 Lumen/Watt**

Light quality:

**CRI: 93.5**

Color temperature:

**4062 K**

CIE 1931:

**x: 0.378  
y: 0.374**


**Output: 841 lm**

**Peak: 1882 cd**



**Power: 14.6 W**

**PF: 0.99**


Spectra:

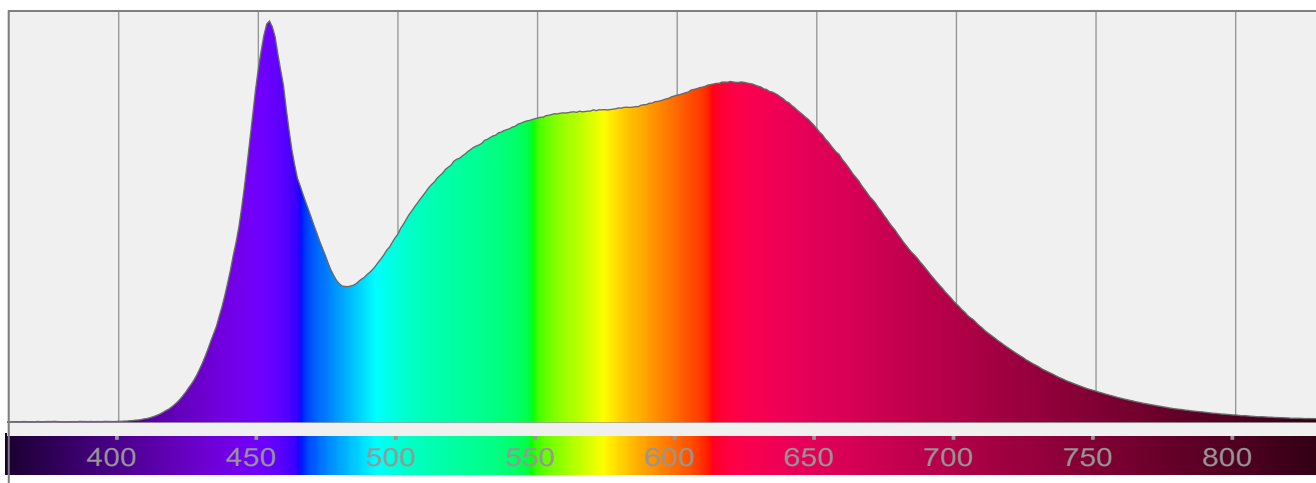


## Color Details

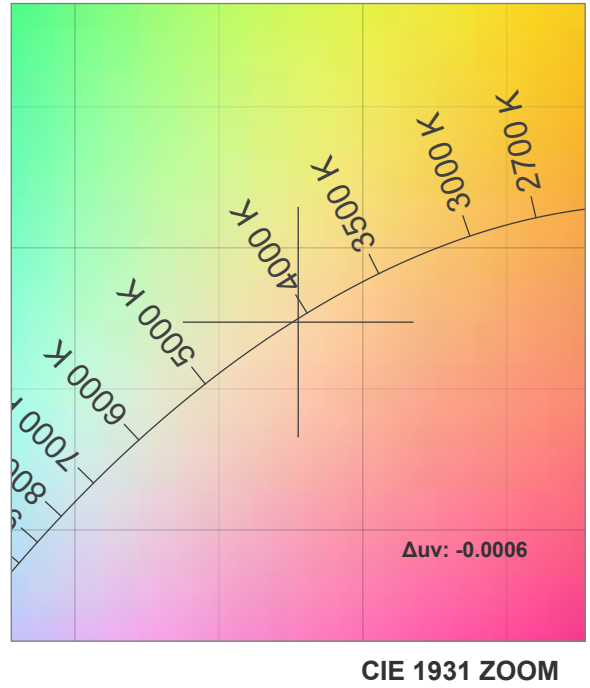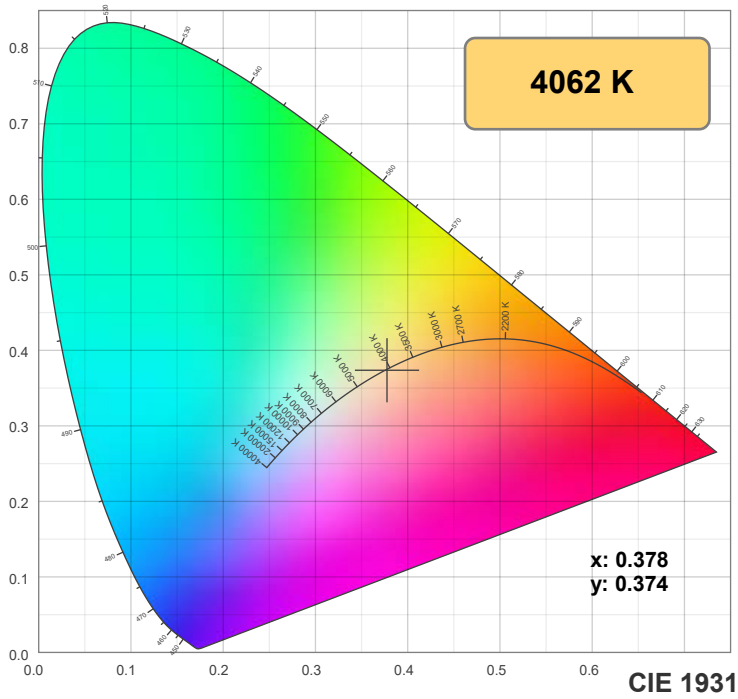

**TM-30: 90.6**

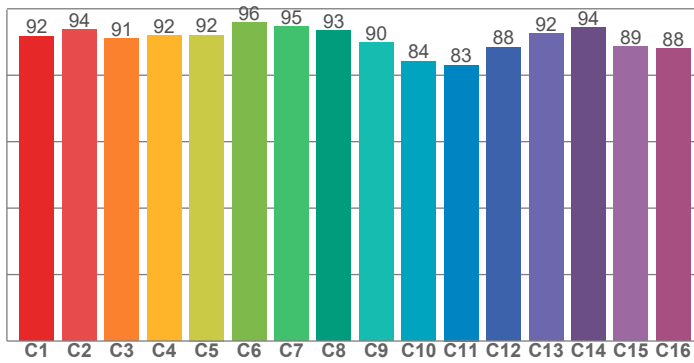

**CRI: 93.5 (R1-R8)**

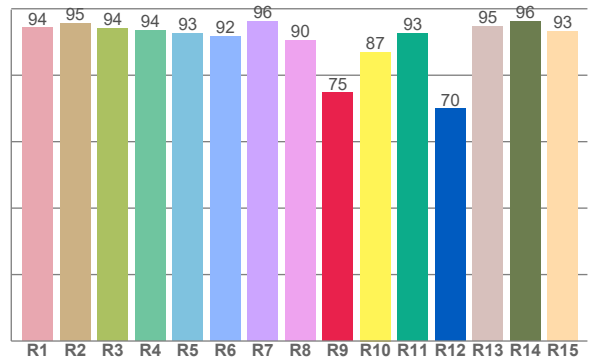

**CRI R Values:**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94.2	95.5	94.0	93.5	92.5	91.6	96.1	90.4	74.7	87.0	92.5	69.8	94.7	96.1	93.1


**TM30 C Values:**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91.8	93.8	90.9	91.9	92.1	95.8	94.7	93.3	89.9	84.2	83.1	88.5	92.5	94.4	88.6	87.9

**CQS Q values:**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93.5	99.2	84.7	83.4	88.7	91.5	92.9	95.2	96.9	93.4	92.5	93.7	94.8	92.4	93.0

**CQS: 91.4**

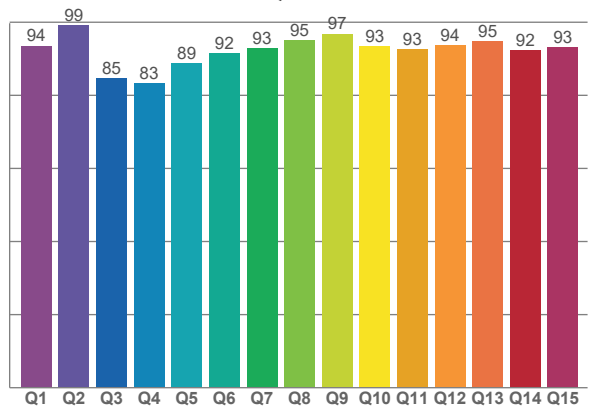

**Color Parameters:**

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4062 K	93.5	74.7	90.6	99.1	91.4	0.378	0.374	0.224	0.333	-0.0006

# TM-30 Details







**Rf 90.6**

Fidelity index Rf


**Rg 99.1**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	92	-4%	0%
2	94	-2%	2%
3	91	-1%	4%
4	92	-2%	2%
5	92	-2%	2%
6	96	0%	0%
7	95	-3%	0%
8	93	-3%	2%
9	90	-3%	7%
10	84	-3%	10%
11	83	3%	11%
12	88	4%	5%
13	92	5%	-1%
14	94	2%	-1%
15	89	2%	-7%
16	88	0%	-7%

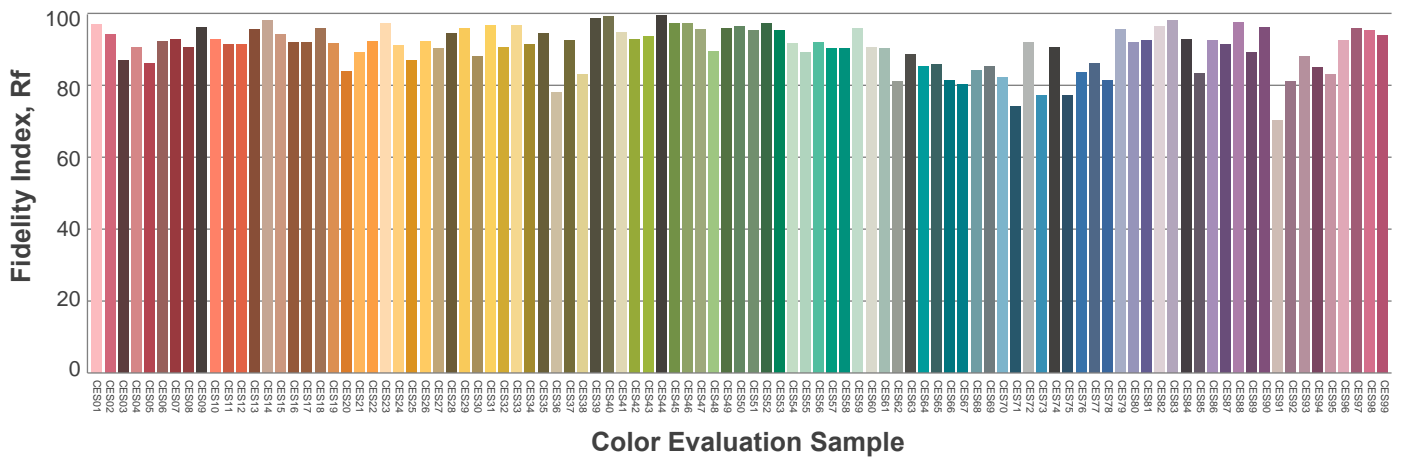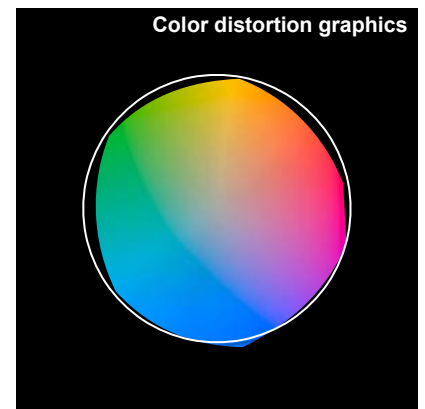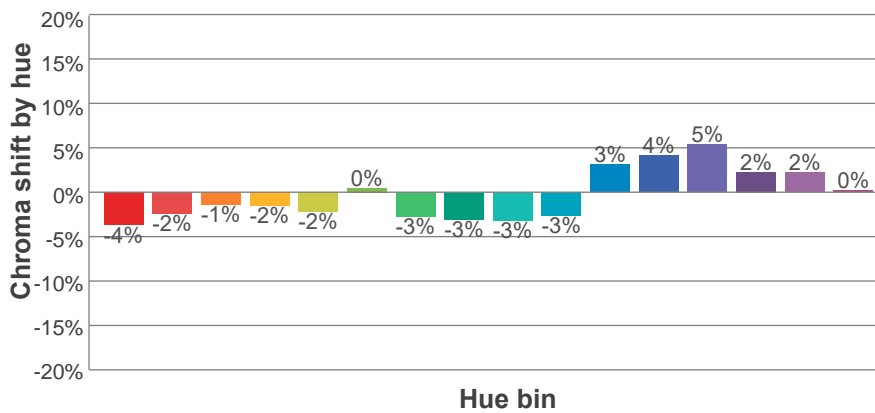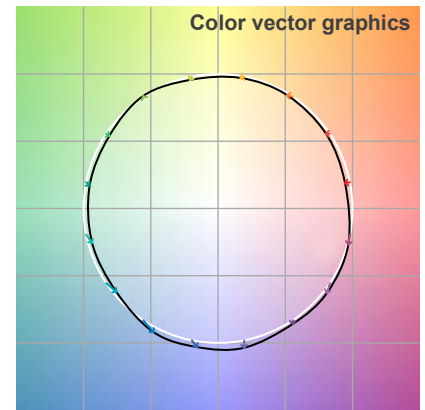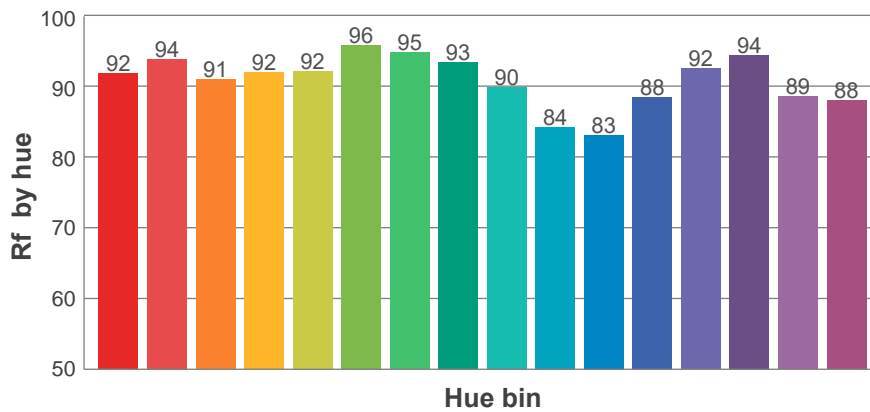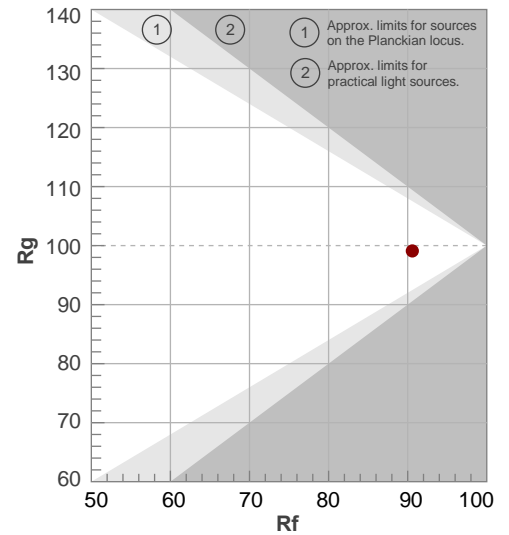

## Beam Details

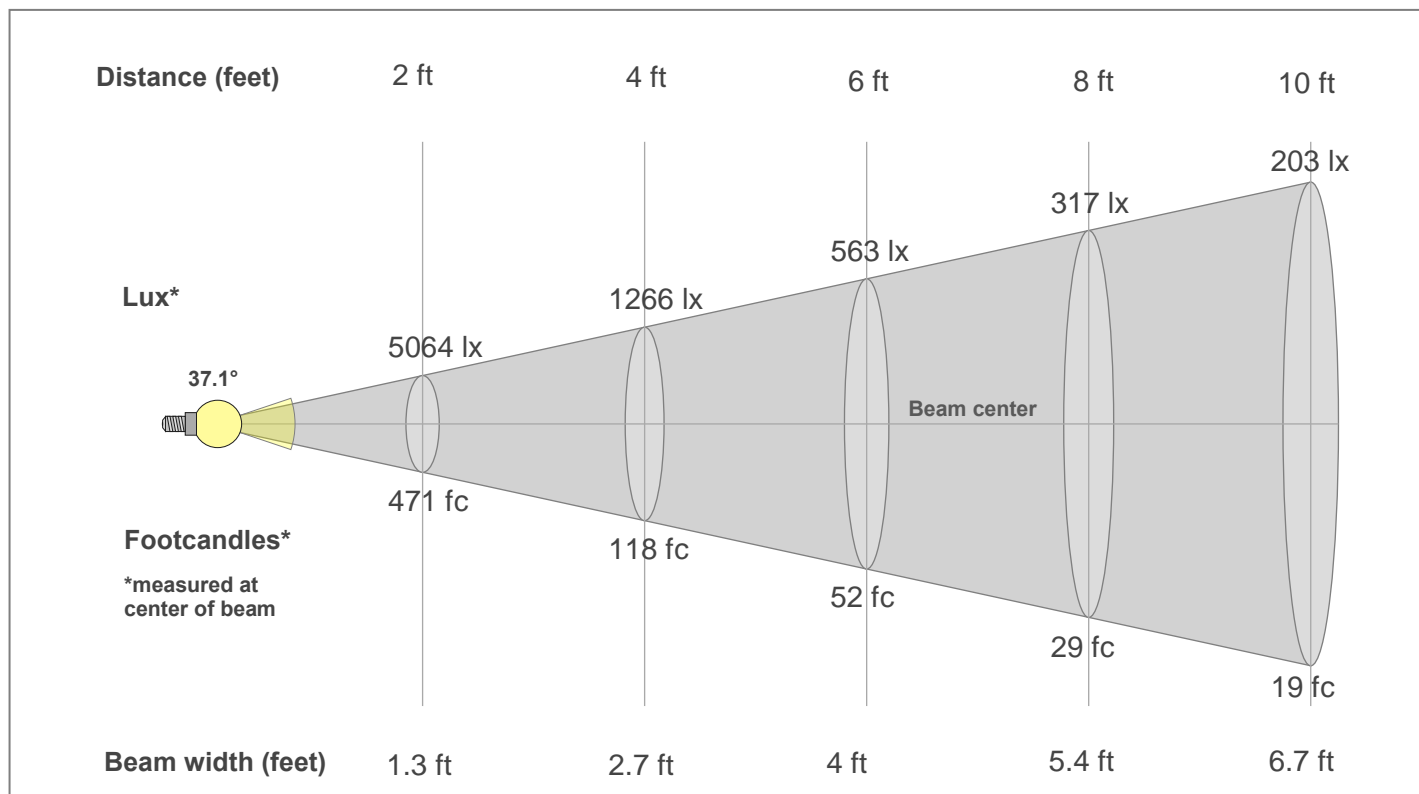

### Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1882lx	471lx	209lx	118lx	75lx	52lx	38lx	29lx	23lx	19lx	16lx	13lx	11lx	10lx	8lx	7lx	7lx	6lx	5lx	5lx
174.8fc	43.7fc	19.4fc	10.9fc	7fc	4.9fc	3.6fc	2.7fc	2.2fc	1.7fc	1.4fc	1.2fc	1fc	0.9fc	0.8fc	0.7fc	0.6fc	0.5fc	0.5fc	0.4fc

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1882	1868	1824	1758	1669	1558	1434	1298	1146	986	830	682	547	432	339	266	206	159	123	94
100%	99%	97%	93%	89%	83%	76%	69%	61%	52%	44%	36%	29%	23%	18%	14%	11%	8%	7%	5%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1882	1868	1824	1758	1669	1558	1434	1298	1146	986	830	682	547	432	339	266	206	159	123	94
100%	99%	97%	93%	89%	83%	76%	69%	61%	52%	44%	36%	29%	23%	18%	14%	11%	8%	7%	5%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1882	1868	1824	1758	1669	1558	1434	1298	1146	986	830	682	547	432	339	266	206	159	123	94
100%	99%	97%	93%	89%	83%	76%	69%	61%	52%	44%	36%	29%	23%	18%	14%	11%	8%	7%	5%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1882	1868	1824	1758	1669	1558	1434	1298	1146	986	830	682	547	432	339	266	206	159	123	94
100%	99%	97%	93%	89%	83%	76%	69%	61%	52%	44%	36%	29%	23%	18%	14%	11%	8%	7%	5%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
37.1°	65.4°	85.2°	99.8%	98.9%