

Photometric / Colorimetric / Electric Report

Fixture Model:



804S-J2S-HI-25-DIM1-8-1400-FS-P-1-WH

Trim Model:

FS-P-1-WH

Date:

4/4/2022

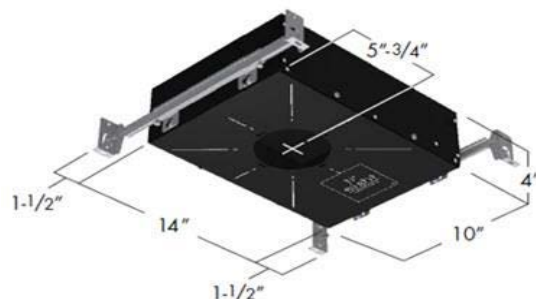

Light efficiency:

52 Lumen/Watt

Light quality:

CRI: 93.3

Color temperature:

3011 K

CIE 1931:

x: 0.438
y: 0.407


Output: 1034 lm

Peak: 3881 cd



Power: 19.9 W

PF: 0.99


Spectra:

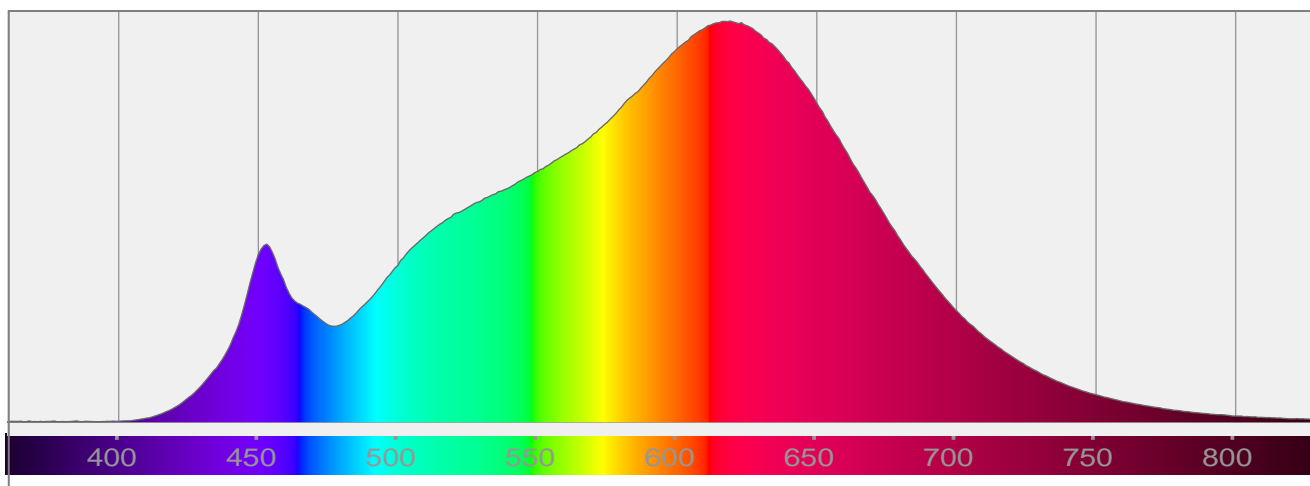


Color Details

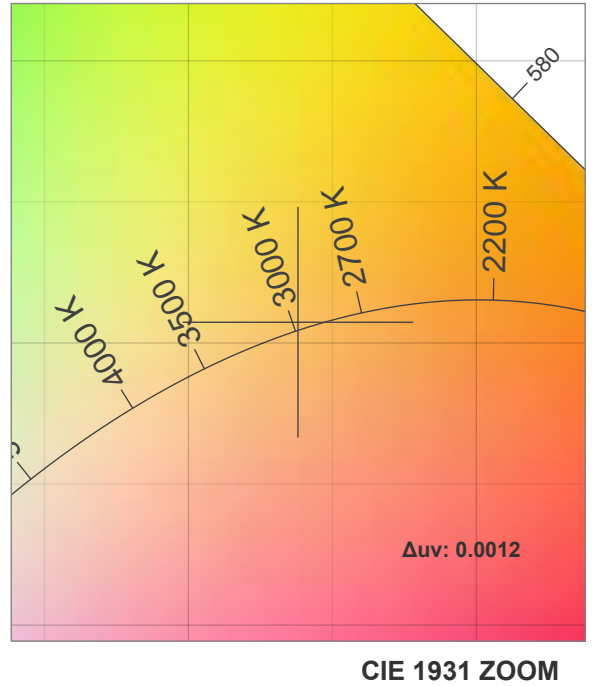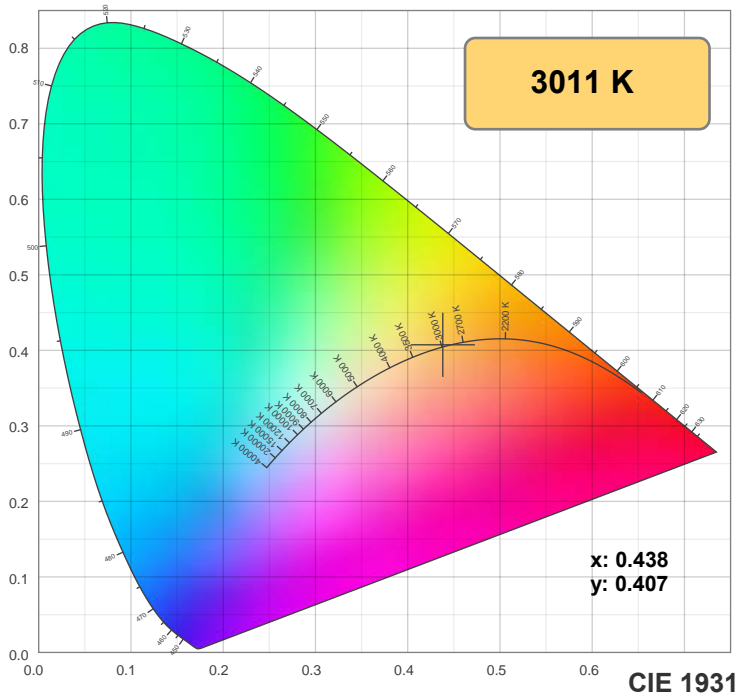

TM-30: 92.7

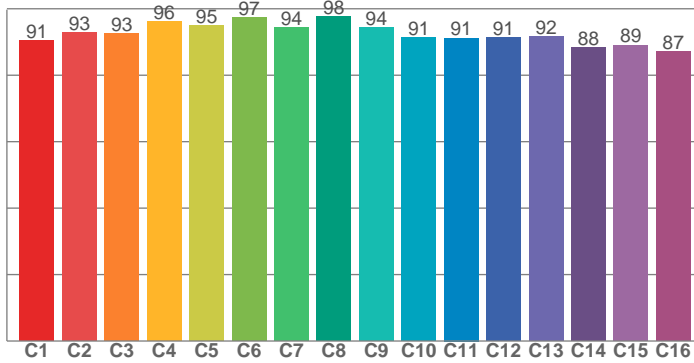

CRI: 93.3 (R1-R8)

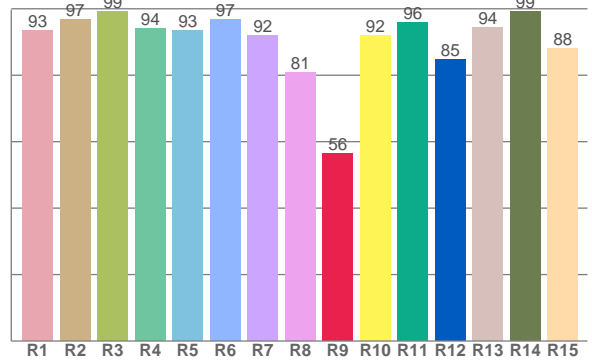

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.4	96.8	99.3	94.0	93.4	96.8	91.9	80.9	56.4	92.0	95.8	84.9	94.4	99.1	88.0


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90.5	92.7	92.5	96.2	95.1	97.3	94.5	97.7	94.4	91.4	91.2	91.3	91.6	88.2	89.1	87.1

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
87.8	95.4	91.9	91.3	93.1	93.9	94.0	94.6	97.3	95.8	95.1	94.2	93.2	86.1	86.7

CQS: 91.8

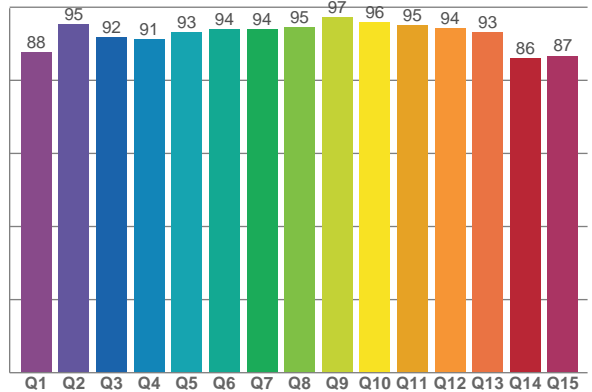

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3011 K	93.3	56.4	92.7	98.0	91.8	0.438	0.407	0.250	0.349	0.0012

TM-30 Details







Rf 92.7

Fidelity index Rf


Rg 98.0

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	91	-5%	0%
2	93	-3%	2%
3	93	-2%	3%
4	96	-1%	1%
5	95	-3%	2%
6	97	0%	0%
7	94	-3%	-1%
8	98	-1%	1%
9	94	-2%	3%
10	91	-1%	5%
11	91	2%	6%
12	91	4%	-1%
13	92	2%	-6%
14	88	2%	-9%
15	89	-2%	-6%
16	87	-3%	-9%

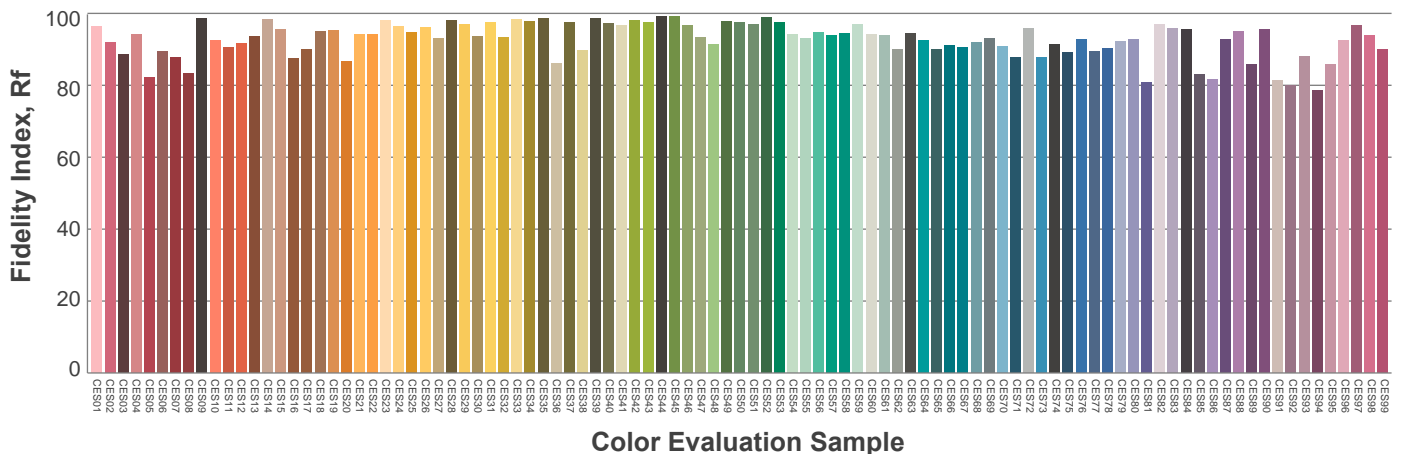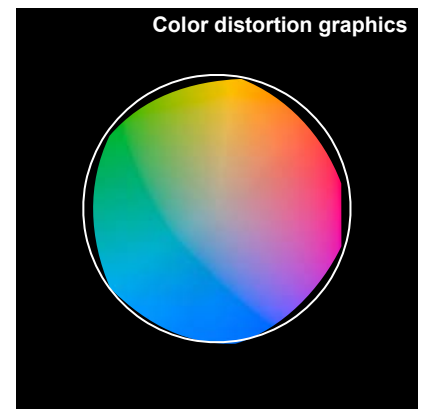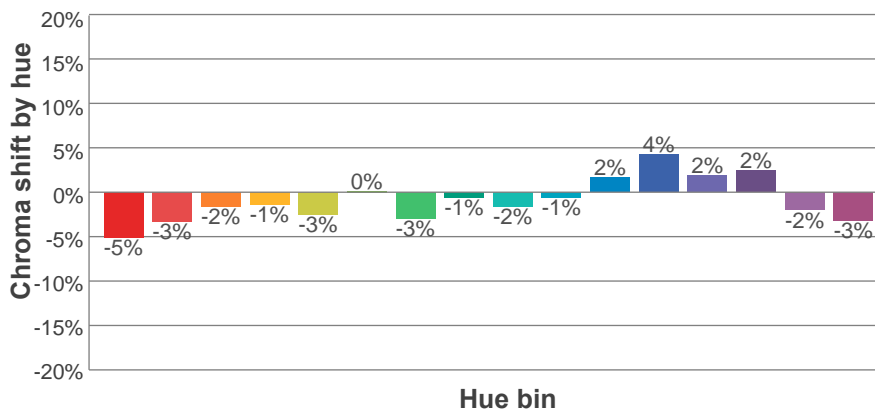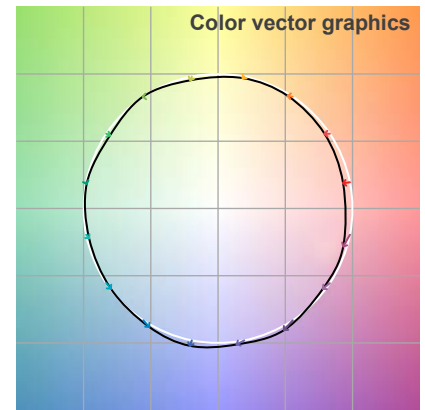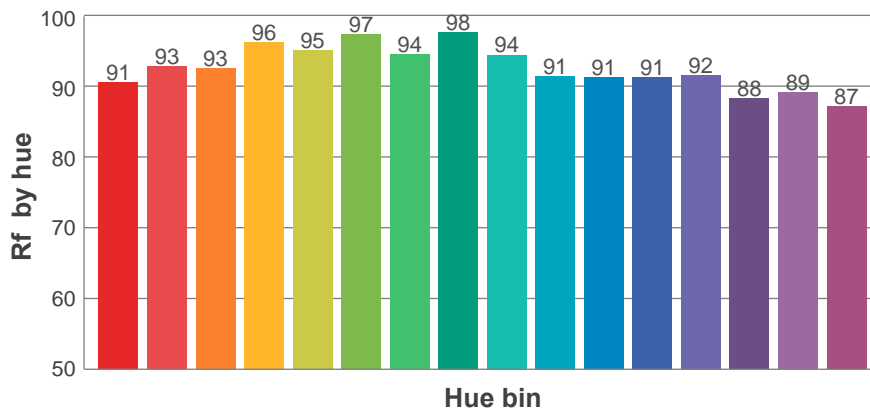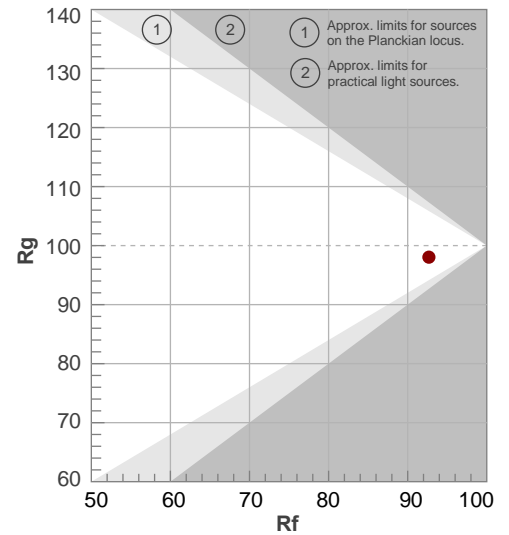

Beam Details

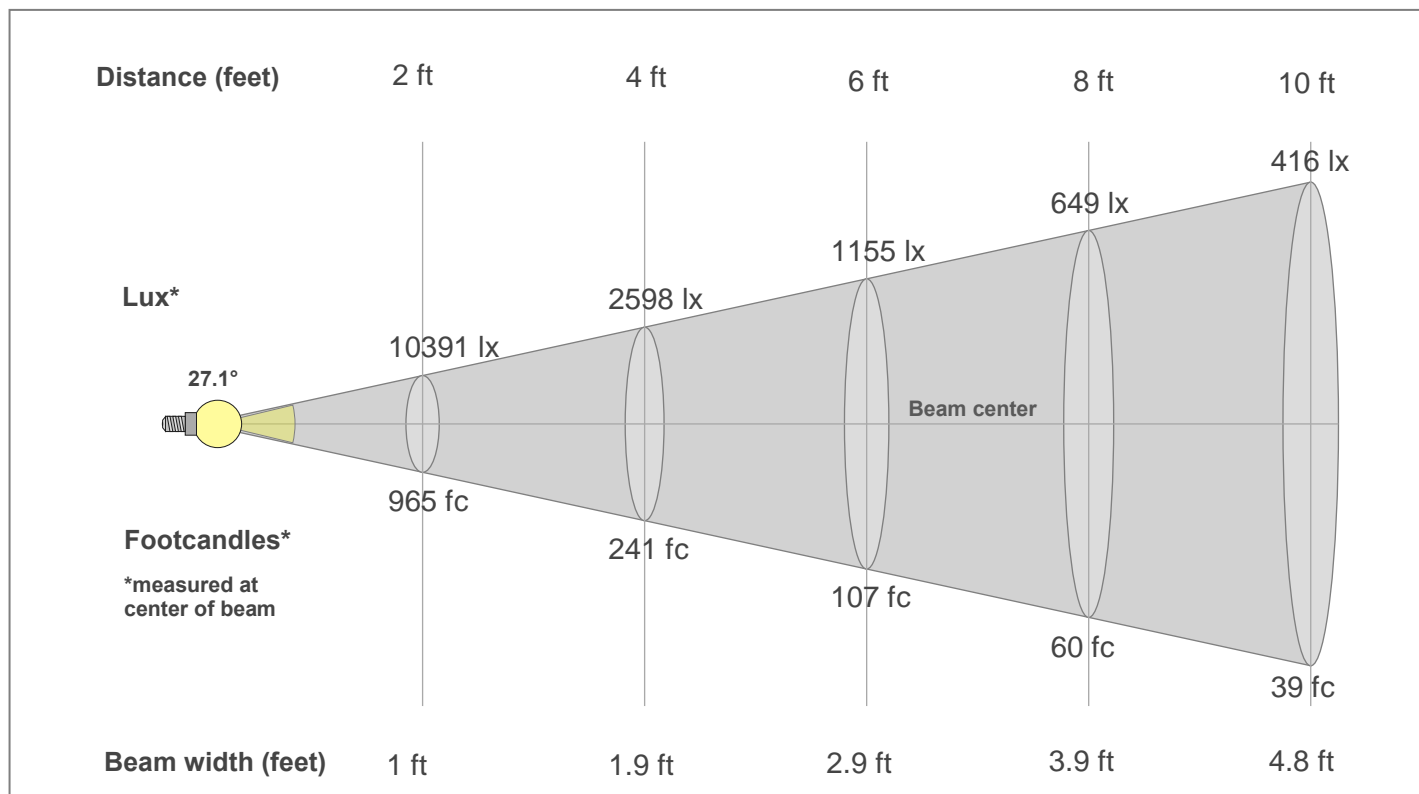

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3862lx	965lx	429lx	241lx	154lx	107lx	79lx	60lx	48lx	39lx	32lx	27lx	23lx	20lx	17lx	15lx	13lx	12lx	11lx	10lx
358.7fc	89.7fc	39.9fc	22.4fc	14.3fc	10fc	7.3fc	5.6fc	4.4fc	3.6fc	3fc	2.5fc	2.1fc	1.8fc	1.6fc	1.4fc	1.2fc	1.1fc	1fc	0.9fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3862	3813	3619	3329	2974	2596	2215	1857	1528	1235	975	735	537	388	263	171	112	71	45	28
100%	99%	94%	86%	77%	67%	57%	48%	40%	32%	25%	19%	14%	10%	7%	4%	3%	2%	1%	1%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3862	3786	3608	3328	2986	2597	2210	1843	1514	1221	964	737	536	374	251	165	107	68	43	27
100%	98%	93%	86%	77%	67%	57%	48%	39%	32%	25%	19%	14%	10%	7%	4%	3%	2%	1%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3862	3813	3619	3329	2974	2596	2215	1857	1528	1235	975	735	537	388	263	171	112	71	45	28
100%	99%	94%	86%	77%	67%	57%	48%	40%	32%	25%	19%	14%	10%	7%	4%	3%	2%	1%	1%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3862	3786	3608	3328	2986	2597	2210	1843	1514	1221	964	737	536	374	251	165	107	68	43	27
100%	98%	93%	86%	77%	67%	57%	48%	39%	32%	25%	19%	14%	10%	7%	4%	3%	2%	1%	1%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
27.1°	51.9°	65.1°	99.4%	99.2%