

## Photometric / Colorimetric / Electric Report

Fixture Model:



804S-J2S-HI-40-DIM1-8-1400-FS-P-1-WH

Trim Model:

FS-P-1-WH

Date:

4/4/2022

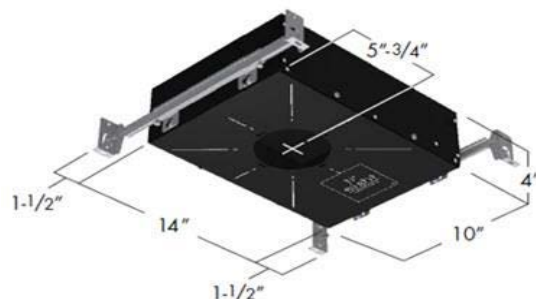

Light efficiency:

60 Lumen/Watt

Light quality:

CRI: 93.2

Color temperature:

2995 K

CIE 1931:

x: 0.440  
y: 0.410


Output: 1183 lm

Peak: 2275 cd



Power: 19.8 W

PF: 0.99


Spectra:

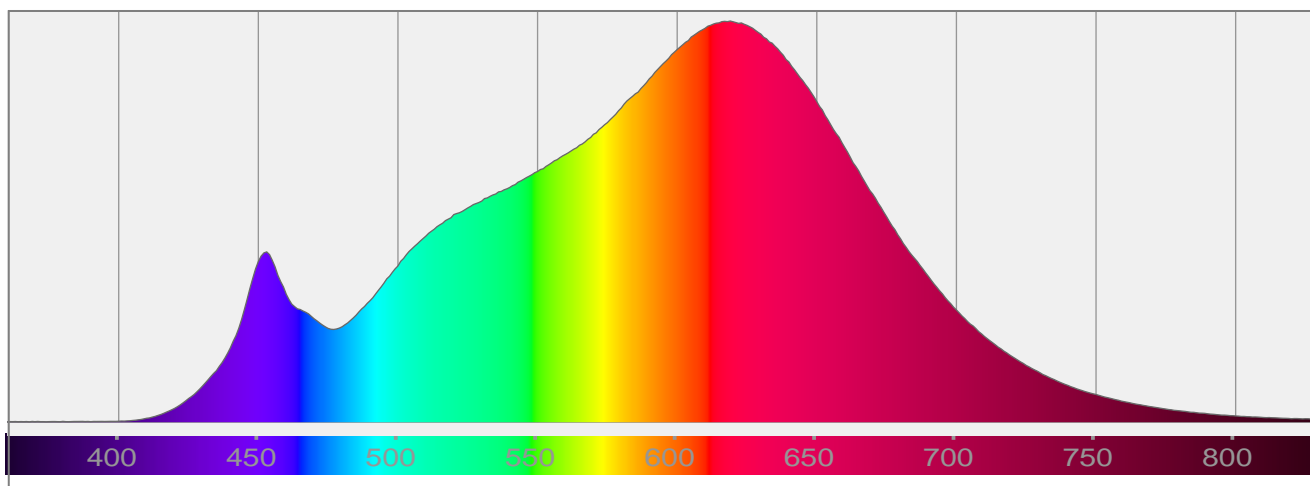


## Color Details

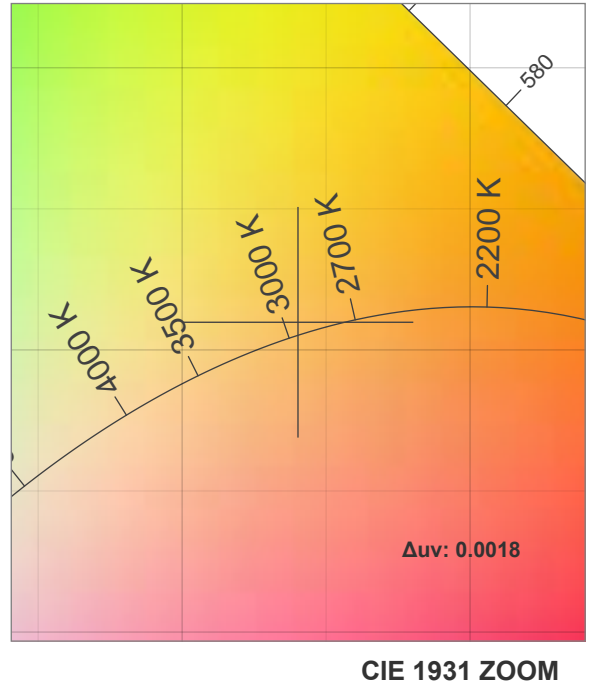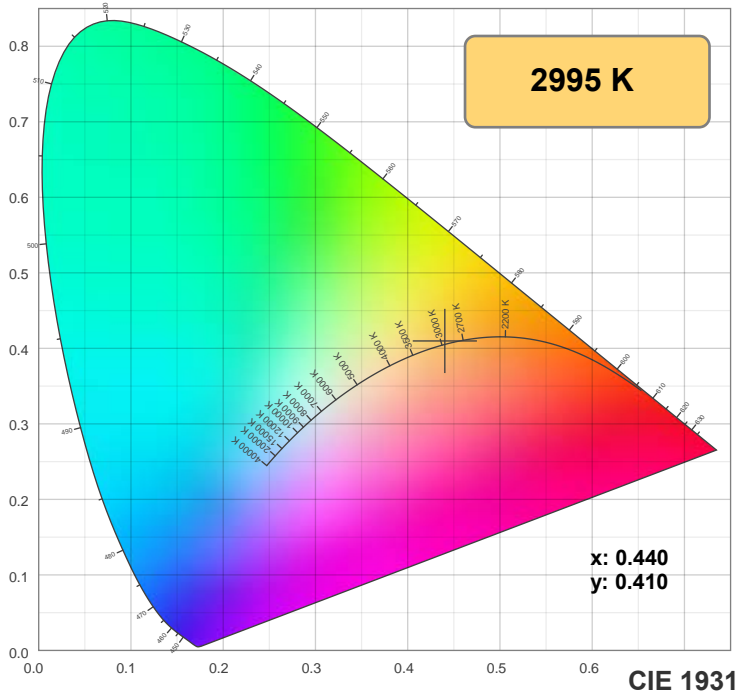

**TM-30: 92.7**

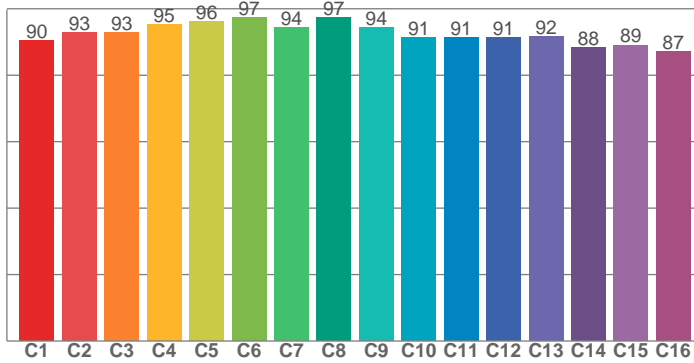

**CRI: 93.2 (R1-R8)**

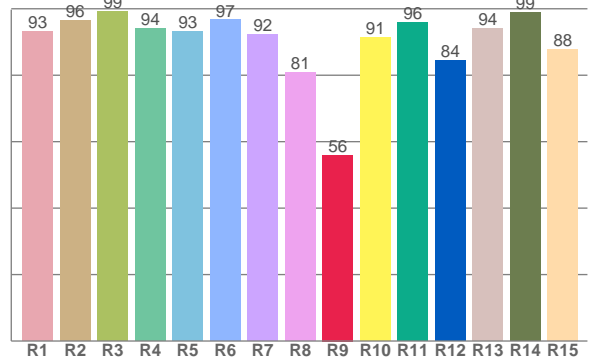

**CRI R Values:**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.1	96.5	99.3	94.0	93.0	96.6	92.2	80.9	56.0	91.3	95.8	84.4	94.1	98.9	87.6


**TM30 C Values:**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90.5	92.8	92.8	95.2	96.2	97.3	94.4	97.3	94.3	91.4	91.3	91.4	91.6	88.3	89.1	87.2

**CQS Q values:**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
87.7	95.3	92.2	91.6	93.1	93.7	94.1	95.1	97.0	95.3	94.7	94.3	93.4	86.0	86.7

**CQS: 91.8**

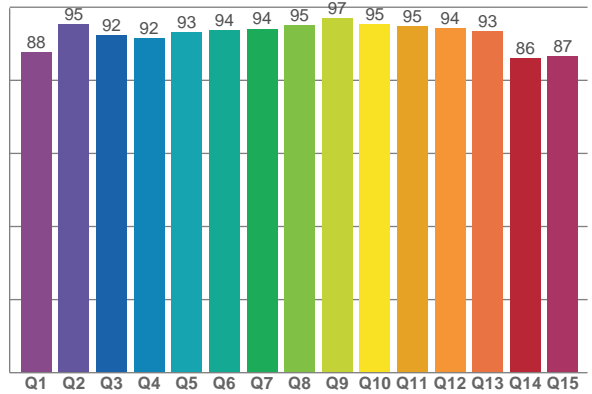

**Color Parameters:**

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2995 K	93.2	56.0	92.7	97.8	91.8	0.440	0.410	0.250	0.349	0.0018

# TM-30 Details






**Rf 92.7**

Fidelity index Rf


**Rg 97.8**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	90	-5%	0%
2	93	-3%	2%
3	93	-2%	3%
4	95	-2%	0%
5	96	-1%	2%
6	97	0%	0%
7	94	-3%	0%
8	97	-1%	1%
9	94	-2%	3%
10	91	-1%	5%
11	91	2%	6%
12	91	4%	-1%
13	92	2%	-6%
14	88	2%	-9%
15	89	-2%	-6%
16	87	-3%	-9%

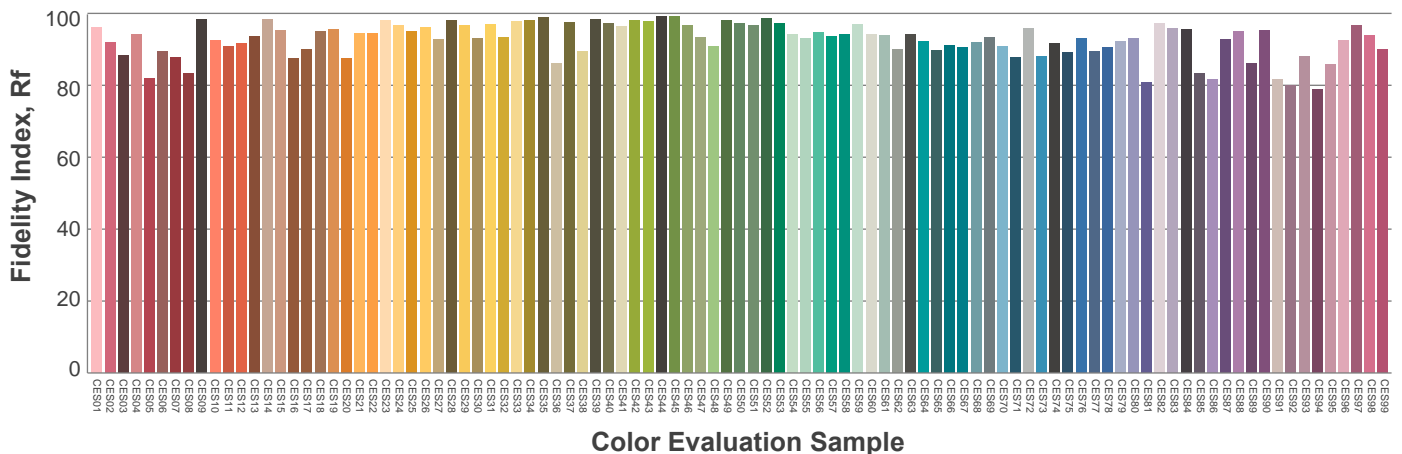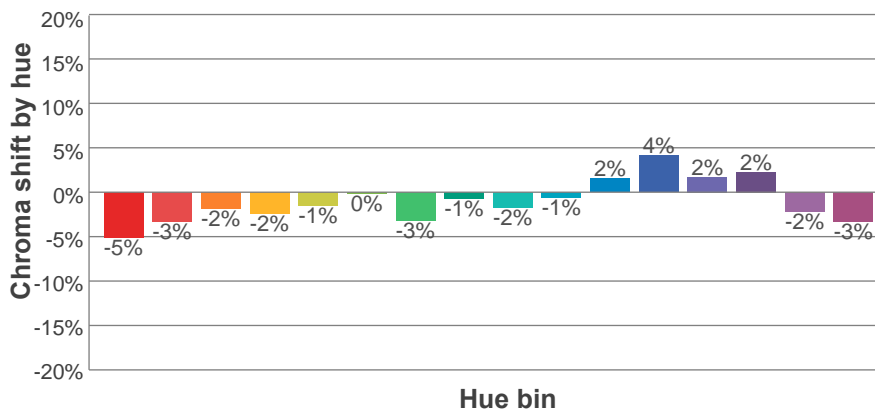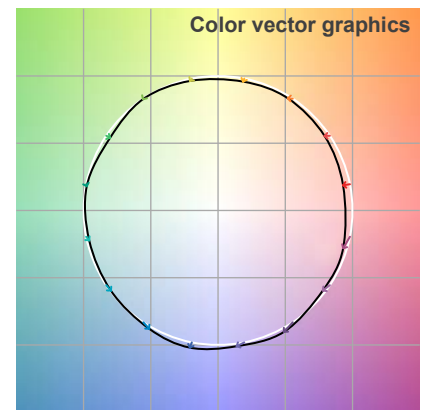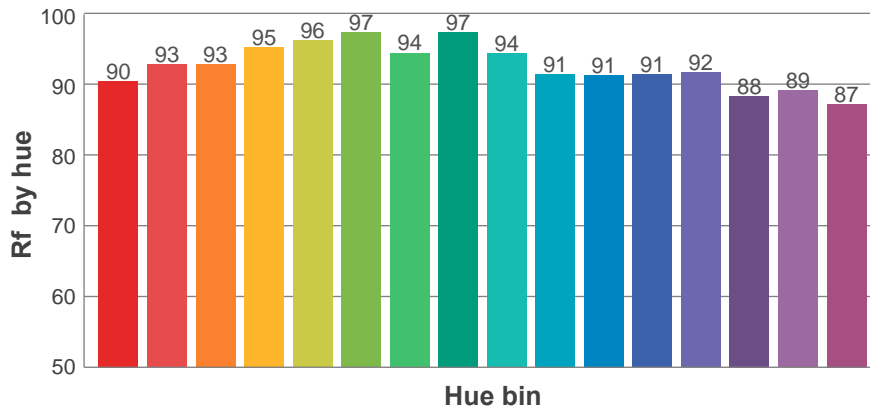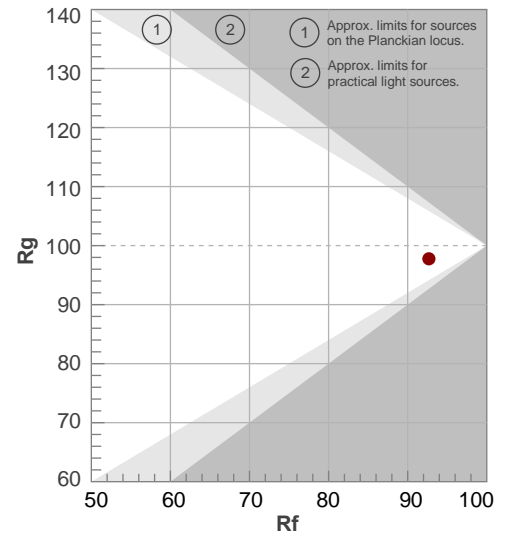

## Beam Details

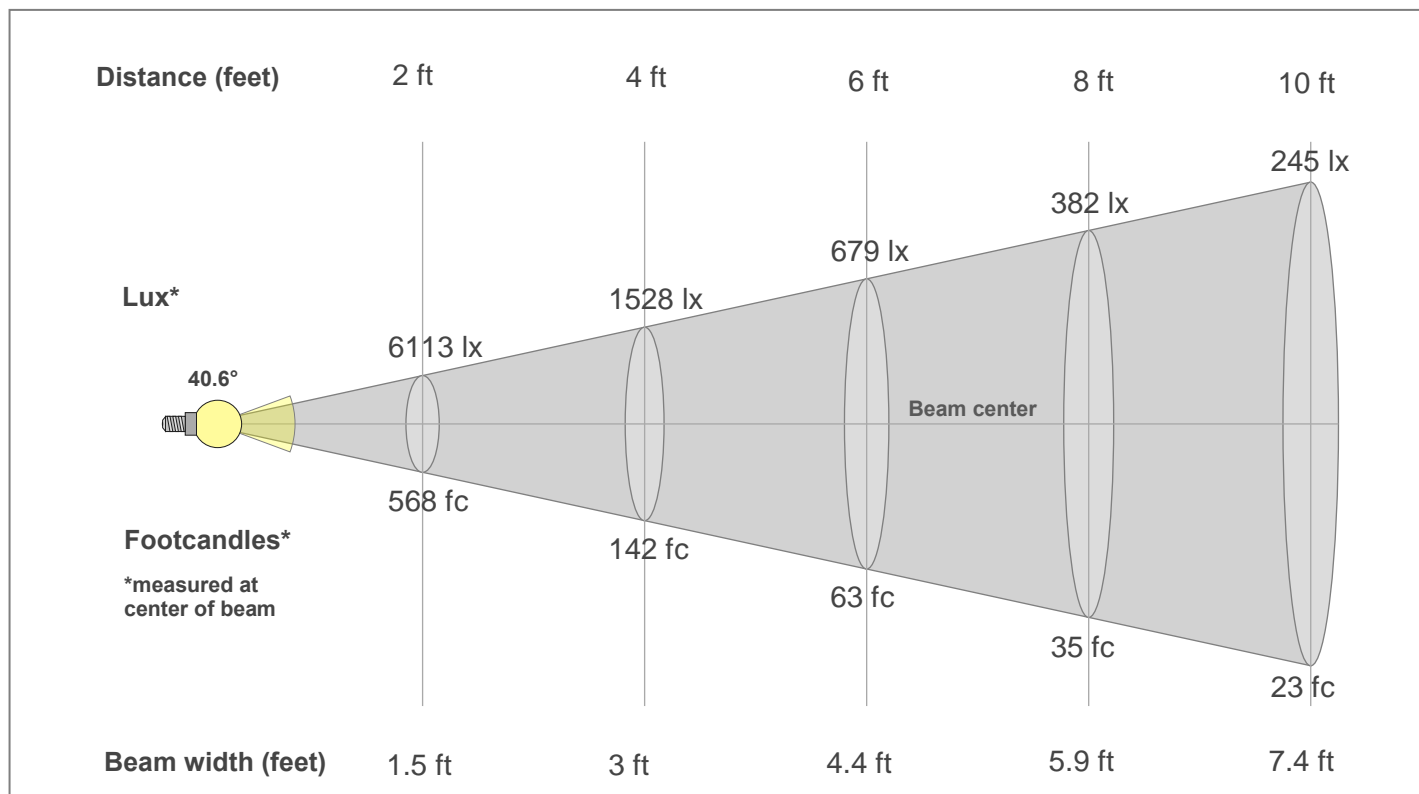

### Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2272lx	568lx	252lx	142lx	91lx	63lx	46lx	35lx	28lx	23lx	19lx	16lx	13lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx
211.1fc	52.8fc	23.5fc	13.2fc	8.4fc	5.9fc	4.3fc	3.3fc	2.6fc	2.1fc	1.7fc	1.5fc	1.2fc	1.1fc	0.9fc	0.8fc	0.7fc	0.7fc	0.6fc	0.5fc

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2272	2260	2223	2161	2072	1962	1833	1687	1524	1344	1159	975	805	661	535	428	340	266	210	163
100%	99%	98%	95%	91%	86%	81%	74%	67%	59%	51%	43%	35%	29%	24%	19%	15%	12%	9%	7%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2272	2261	2223	2160	2077	1968	1841	1698	1536	1359	1172	986	808	656	532	428	342	273	217	170
100%	100%	98%	95%	91%	87%	81%	75%	68%	60%	52%	43%	36%	29%	23%	19%	15%	12%	10%	7%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2272	2260	2223	2161	2072	1962	1833	1687	1524	1344	1159	975	805	661	535	428	340	266	210	163
100%	99%	98%	95%	91%	86%	81%	74%	67%	59%	51%	43%	35%	29%	24%	19%	15%	12%	9%	7%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2272	2261	2223	2160	2077	1968	1841	1698	1536	1359	1172	986	808	656	532	428	342	273	217	170
100%	100%	98%	95%	91%	87%	81%	75%	68%	60%	52%	43%	36%	29%	23%	19%	15%	12%	10%	7%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
40.6°	70.9°	88.8°	99.6%	98.6%