


Photometric / Colorimetric / Electric Report

Fixture Model:
804S-J2S-WD-4-25-PR1-8-350-FR-LG-P-1-WH-NL

Trim Model:
FR-LG-P-1-WH/NL

Date:
8/6/2024

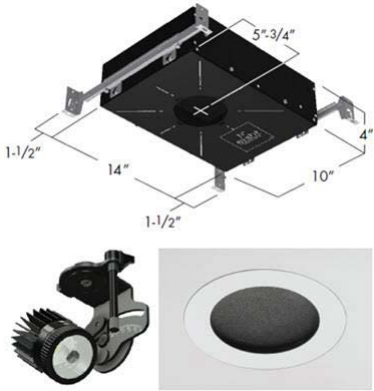

Light efficiency:
53 Lumen/Watt


Light quality:
CRI: 96.6

Color temperature:
3013 K



CIE 1931:
x: 0.433
y: 0.398

Output:	772 lm
Peak:	2563 cd
Power:	14.6 W
PF:	0.99


Spectra:

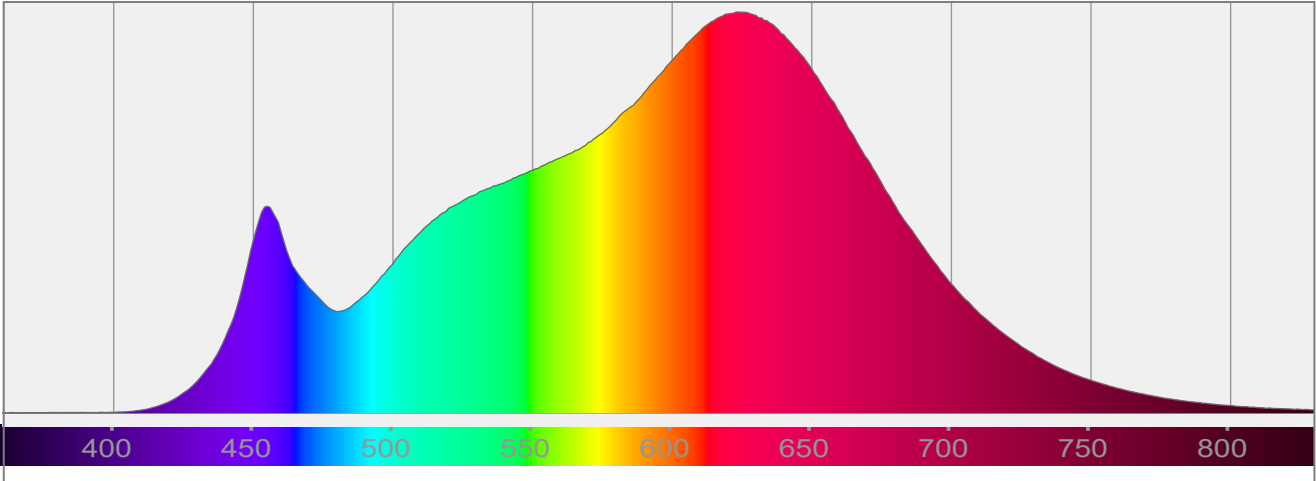


Color Details

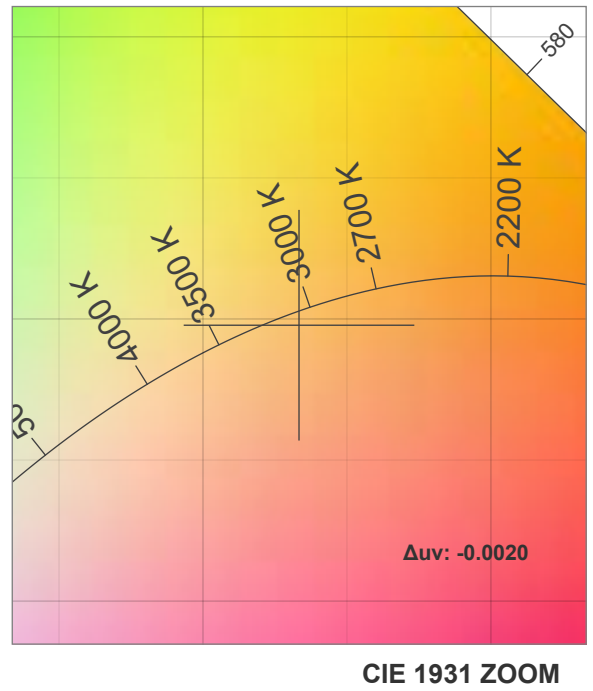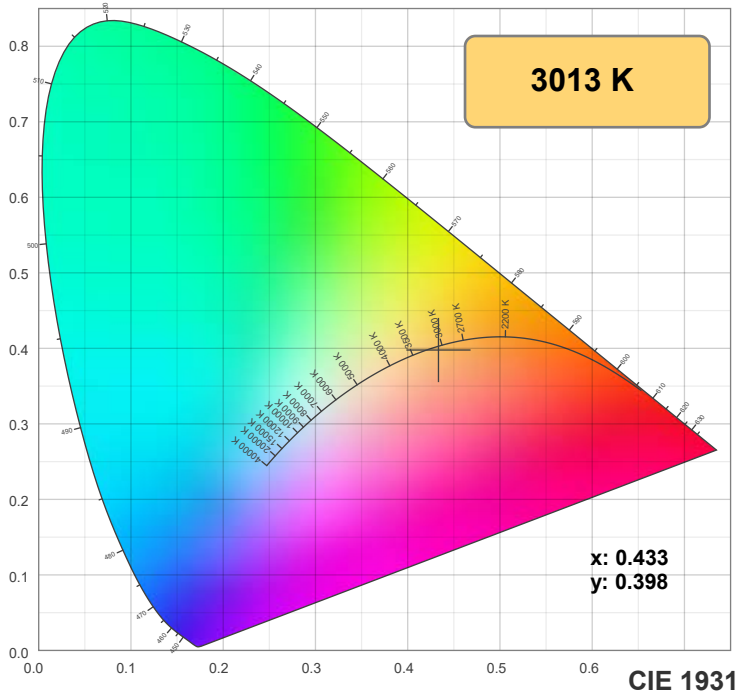

TM-30: 93.7

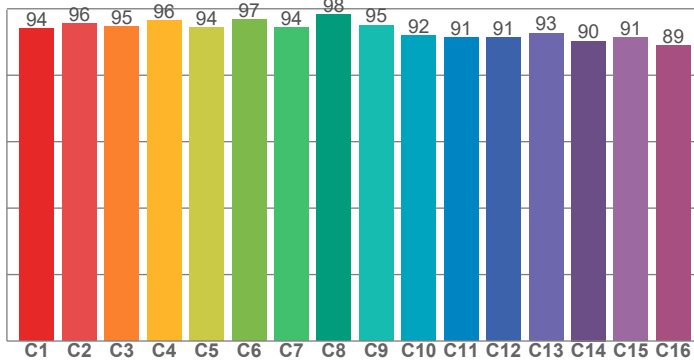

CRI: 96.6 (R1-R8)

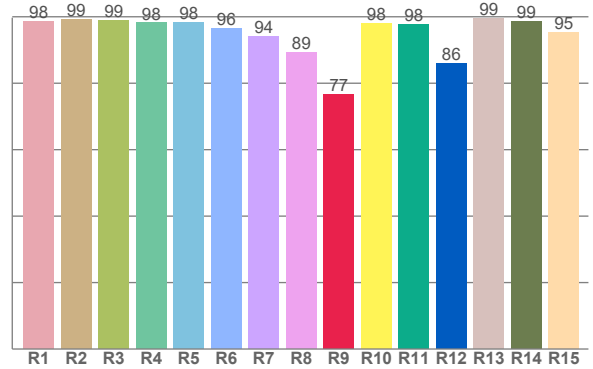

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.5	99.3	98.8	98.1	98.3	96.4	94.1	89.2	76.5	98.1	97.6	86.0	99.4	98.6	95.3


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.0	95.6	94.6	96.4	94.3	96.7	94.4	98.4	95.1	91.9	91.3	91.4	92.7	90.3	91.4	88.8

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91.6	96.1	91.4	91.7	94.9	96.6	93.6	94.6	98.1	95.9	95.8	95.4	95.0	91.8	91.6

CQS: 93.8

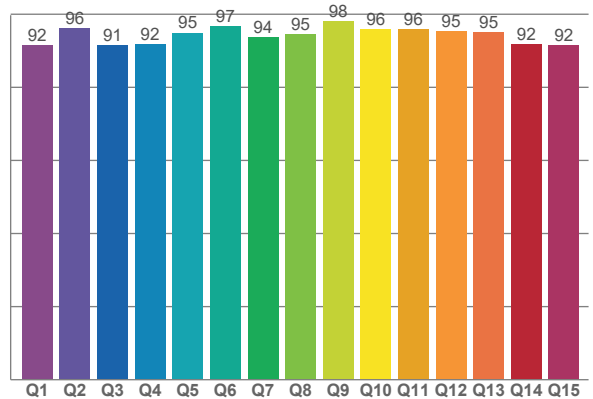

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3013 K	96.6	76.5	93.7	100.3	93.8	0.433	0.398	0.251	0.346	-0.0020

TM-30 Details







Rf 93.7

Fidelity index Rf


Rg 100.3

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	94	-3%	1%
2	96	-1%	1%
3	95	0%	2%
4	96	-1%	0%
5	94	-2%	1%
6	97	1%	1%
7	94	-2%	1%
8	98	0%	0%
9	95	0%	3%
10	92	1%	5%
11	91	3%	6%
12	91	5%	0%
13	93	2%	-5%
14	90	3%	-7%
15	91	-1%	-4%
16	89	-1%	-9%

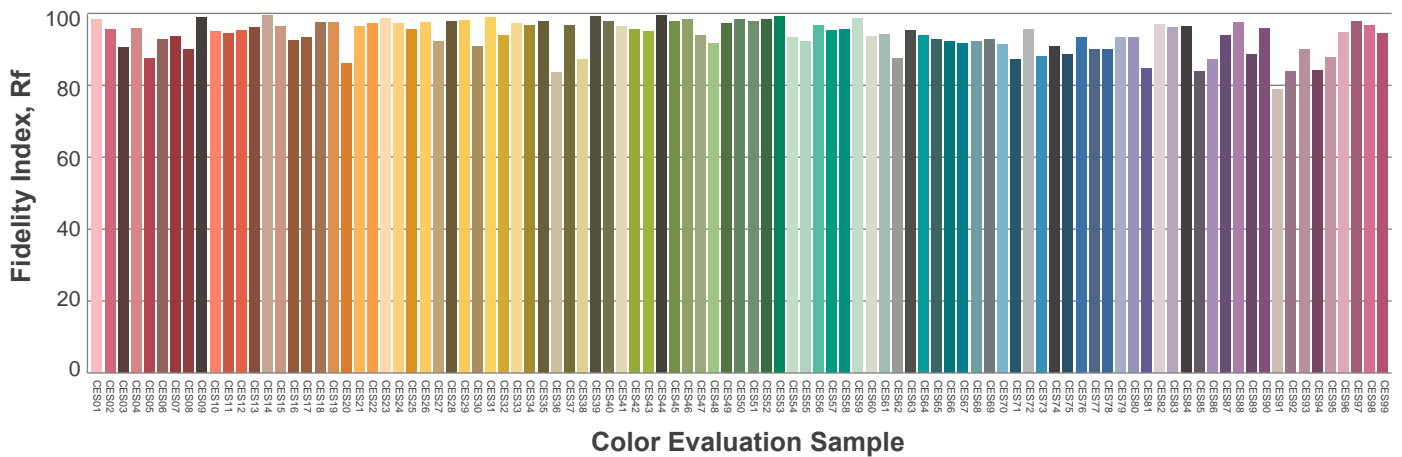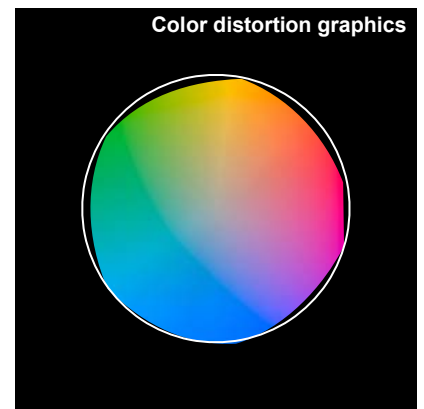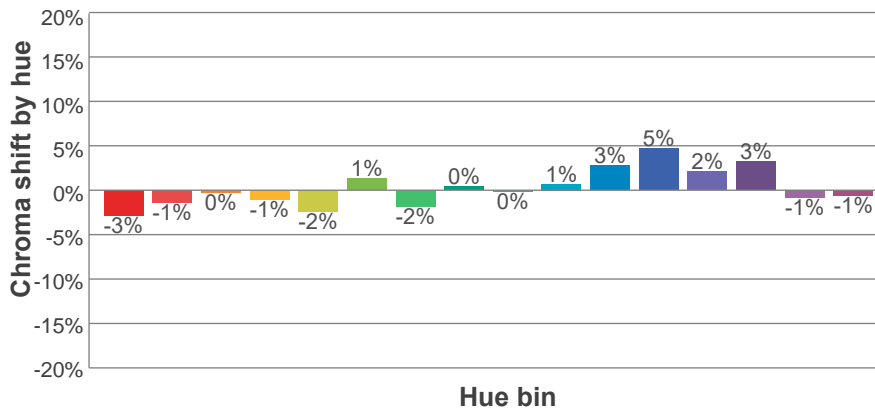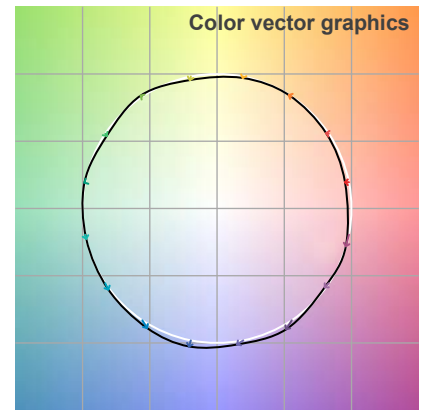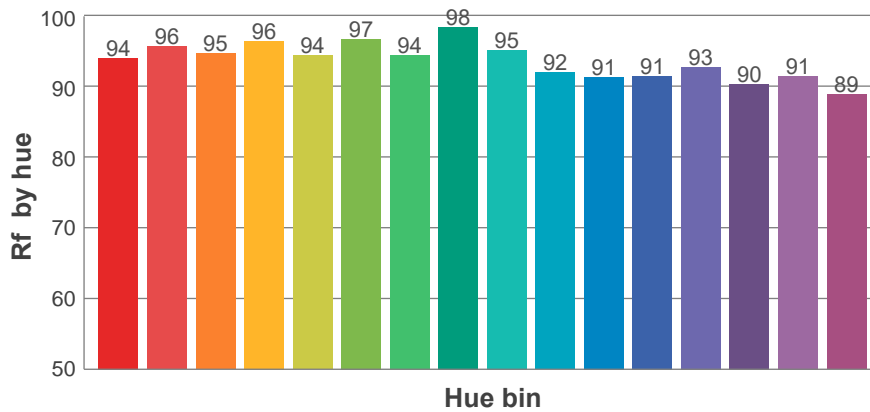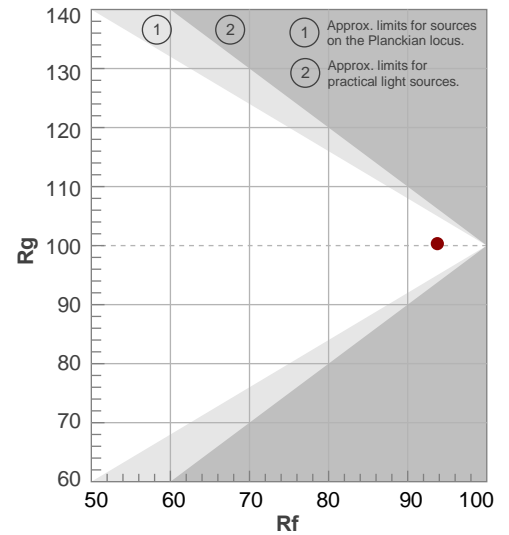

Beam Details

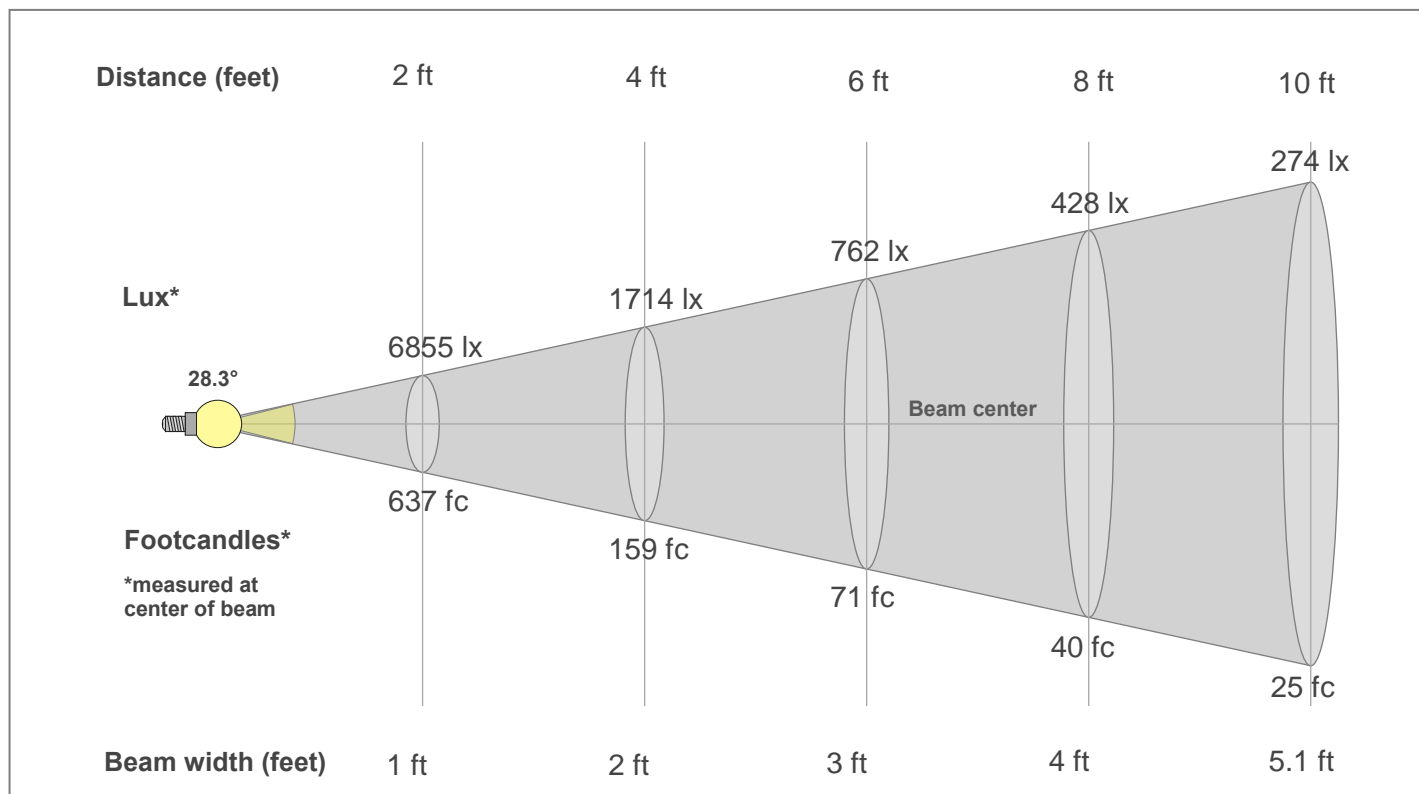

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2547lx	637lx	283lx	159lx	102lx	71lx	52lx	40lx	31lx	25lx	21lx	18lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx	6lx
236.7fc	59.2fc	26.3fc	14.8fc	9.5fc	6.6fc	4.8fc	3.7fc	2.9fc	2.4fc	2fc	1.6fc	1.4fc	1.2fc	1.1fc	0.9fc	0.8fc	0.7fc	0.7fc	0.6fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2547	2529	2424	2257	2046	1812	1563	1312	1076	860	677	524	407	315	247	195	153	115	84	60
100%	99%	95%	89%	80%	71%	61%	52%	42%	34%	27%	21%	16%	12%	10%	8%	6%	5%	3%	2%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2547	2498	2389	2218	2010	1776	1528	1278	1041	829	650	501	389	300	235	185	147	117	88	60
100%	98%	94%	87%	79%	70%	60%	50%	41%	33%	26%	20%	15%	12%	9%	7%	6%	5%	3%	2%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2547	2529	2424	2257	2046	1812	1563	1312	1076	860	677	524	407	315	247	195	153	115	84	60
100%	99%	95%	89%	80%	71%	61%	52%	42%	34%	27%	21%	16%	12%	10%	8%	6%	5%	3%	2%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2547	2498	2389	2218	2010	1776	1528	1278	1041	829	650	501	389	300	235	185	147	117	88	60
100%	98%	94%	87%	79%	70%	60%	50%	41%	33%	26%	20%	15%	12%	9%	7%	6%	5%	3%	2%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
28.3°	55.1°	75.3°	99.5%	98.9%