


Photometric / Colorimetric / Electric Report

Fixture Model:
804S-J2S-WD-4-25-PR1-8-350-FS-LG-P-1-WH-NL

Trim Model:
FS-LG-P-1-WH/NL

Date:
8/6/2024

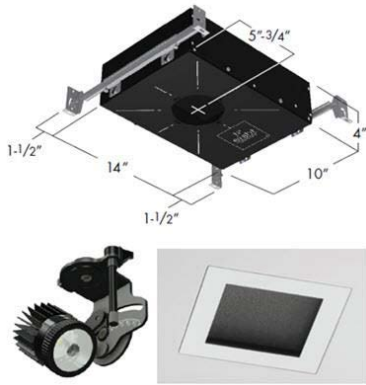

Light efficiency:
53 Lumen/Watt


Light quality:
CRI: 96.5

Color temperature:
3012 K



CIE 1931:
x: 0.433
y: 0.397

Output:	769 lm
Peak:	2533 cd
Power:	14.5 W
PF:	0.99


Spectra:

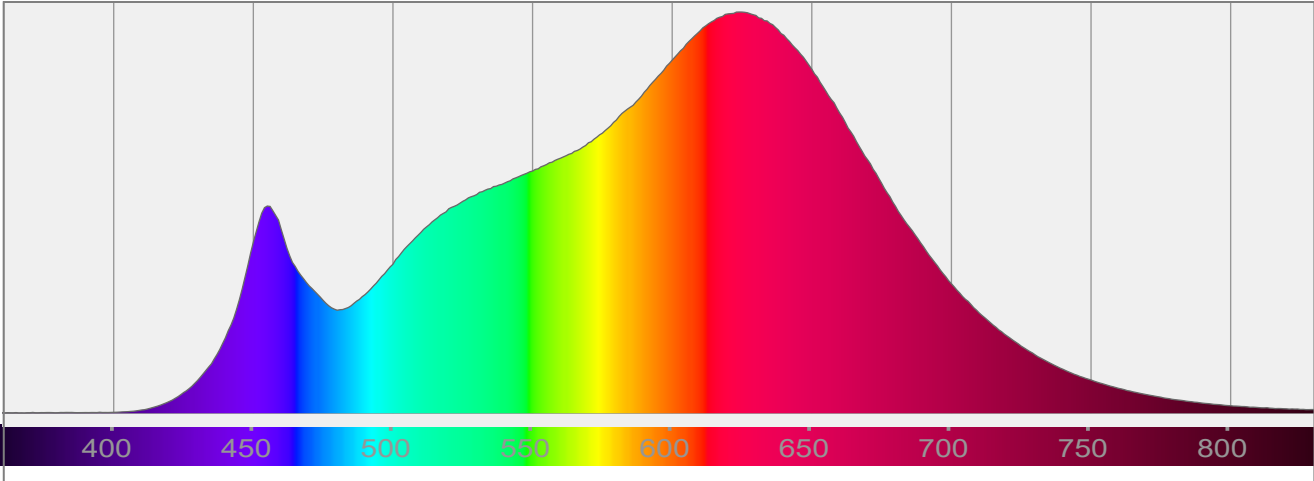


Color Details

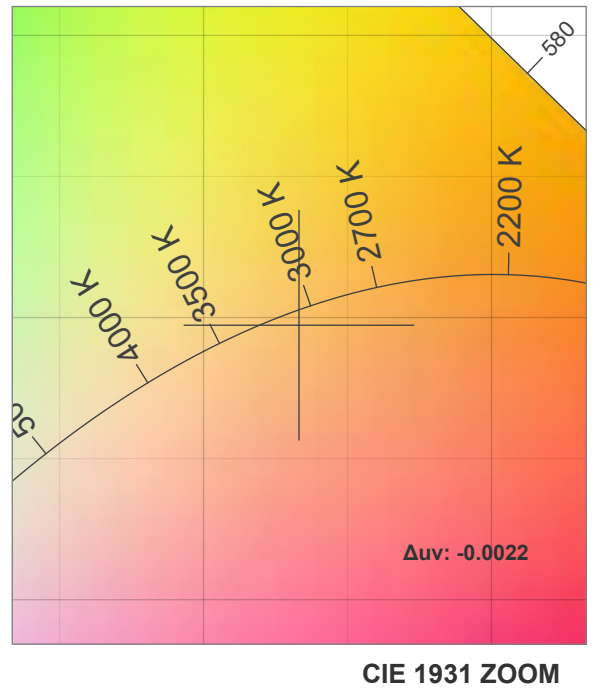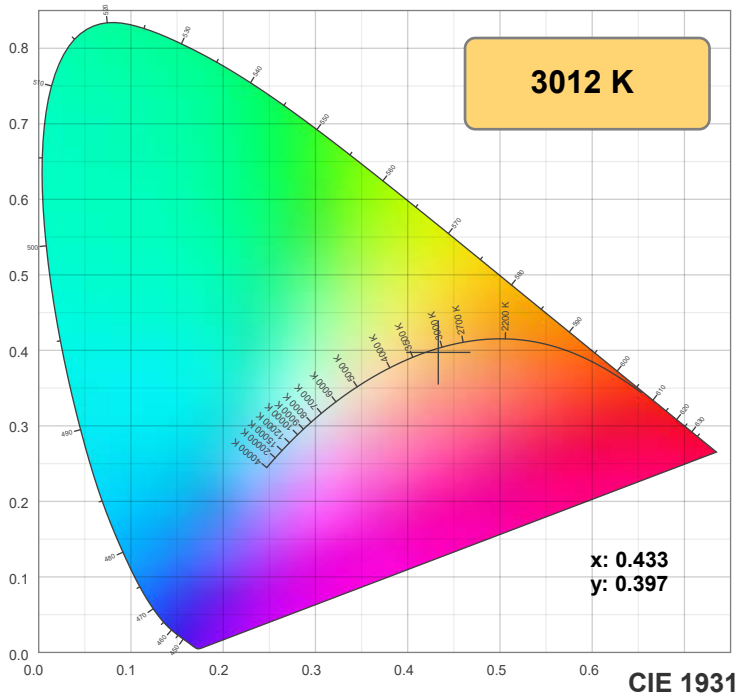

TM-30: 93.7

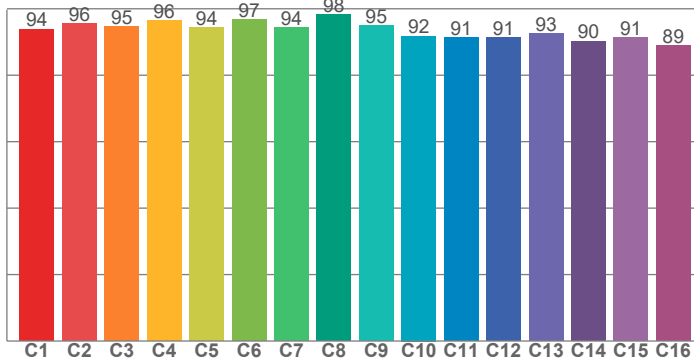

CRI: 96.5 (R1-R8)

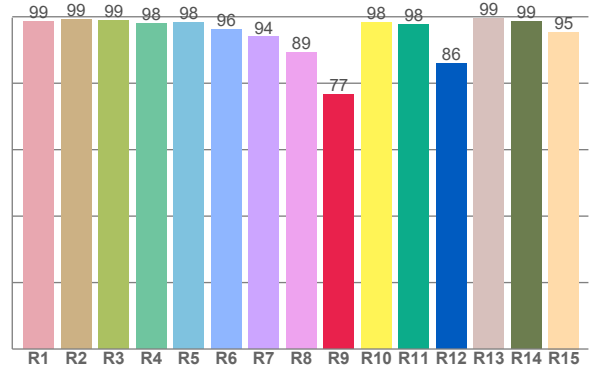

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.5	99.2	98.9	98.1	98.3	96.2	93.9	89.1	76.5	98.4	97.7	86.1	99.4	98.7	95.4


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93.9	95.5	94.6	96.3	94.3	96.7	94.3	98.3	94.9	91.8	91.3	91.4	92.6	90.3	91.3	88.8

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91.5	96.1	91.5	91.7	94.8	96.7	93.6	94.5	98.1	95.9	95.8	95.3	94.9	91.7	91.6

CQS: 93.7

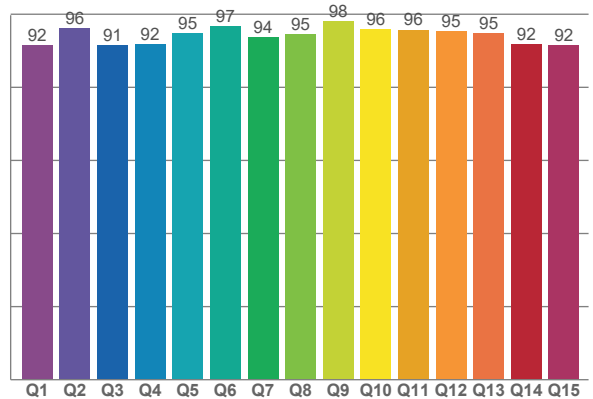

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3012 K	96.5	76.5	93.7	100.3	93.7	0.433	0.397	0.251	0.345	-0.0022

TM-30 Details







Rf 93.7

Fidelity index Rf


Rg 100.3

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	94	-3%	1%
2	96	-1%	1%
3	95	0%	2%
4	96	-1%	0%
5	94	-3%	1%
6	97	1%	1%
7	94	-2%	1%
8	98	0%	0%
9	95	0%	3%
10	92	1%	5%
11	91	3%	6%
12	91	5%	-1%
13	93	2%	-5%
14	90	3%	-7%
15	91	-1%	-4%
16	89	-1%	-9%

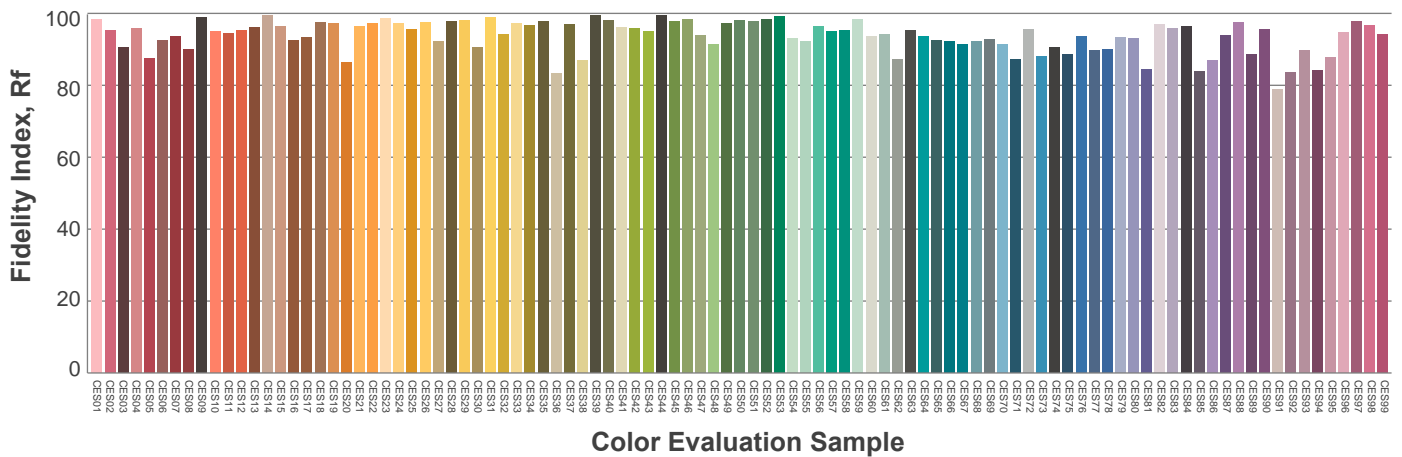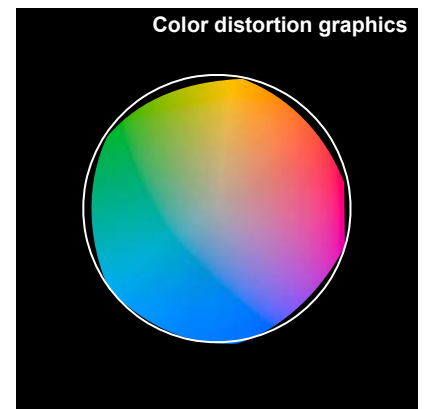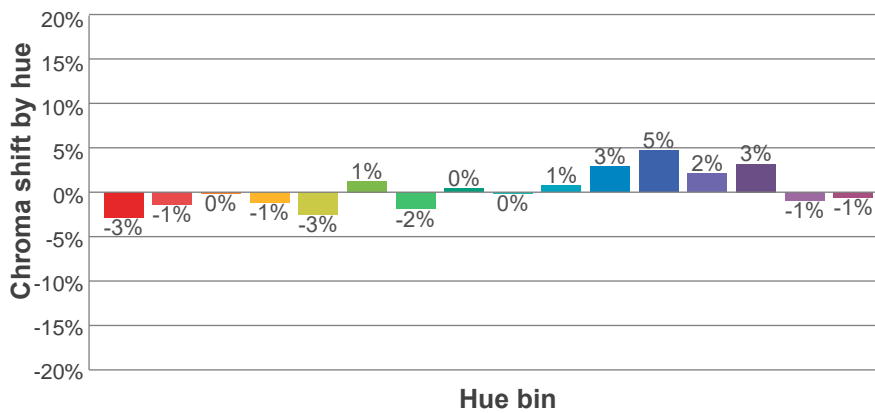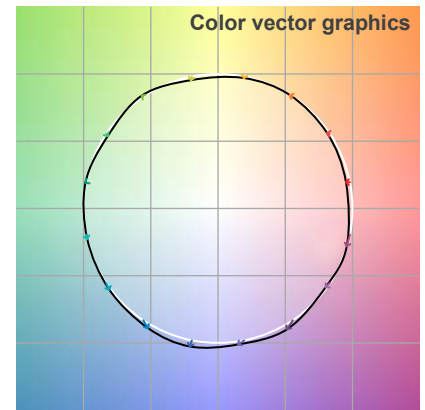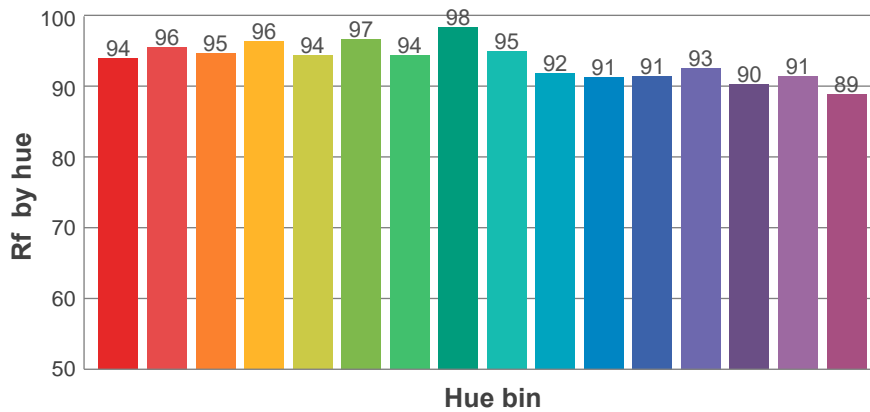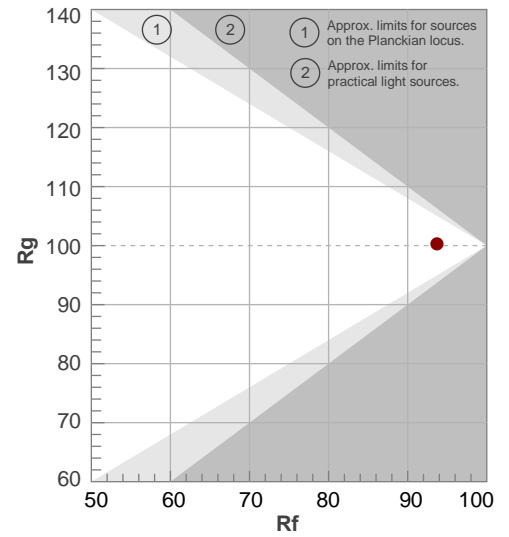

Beam Details

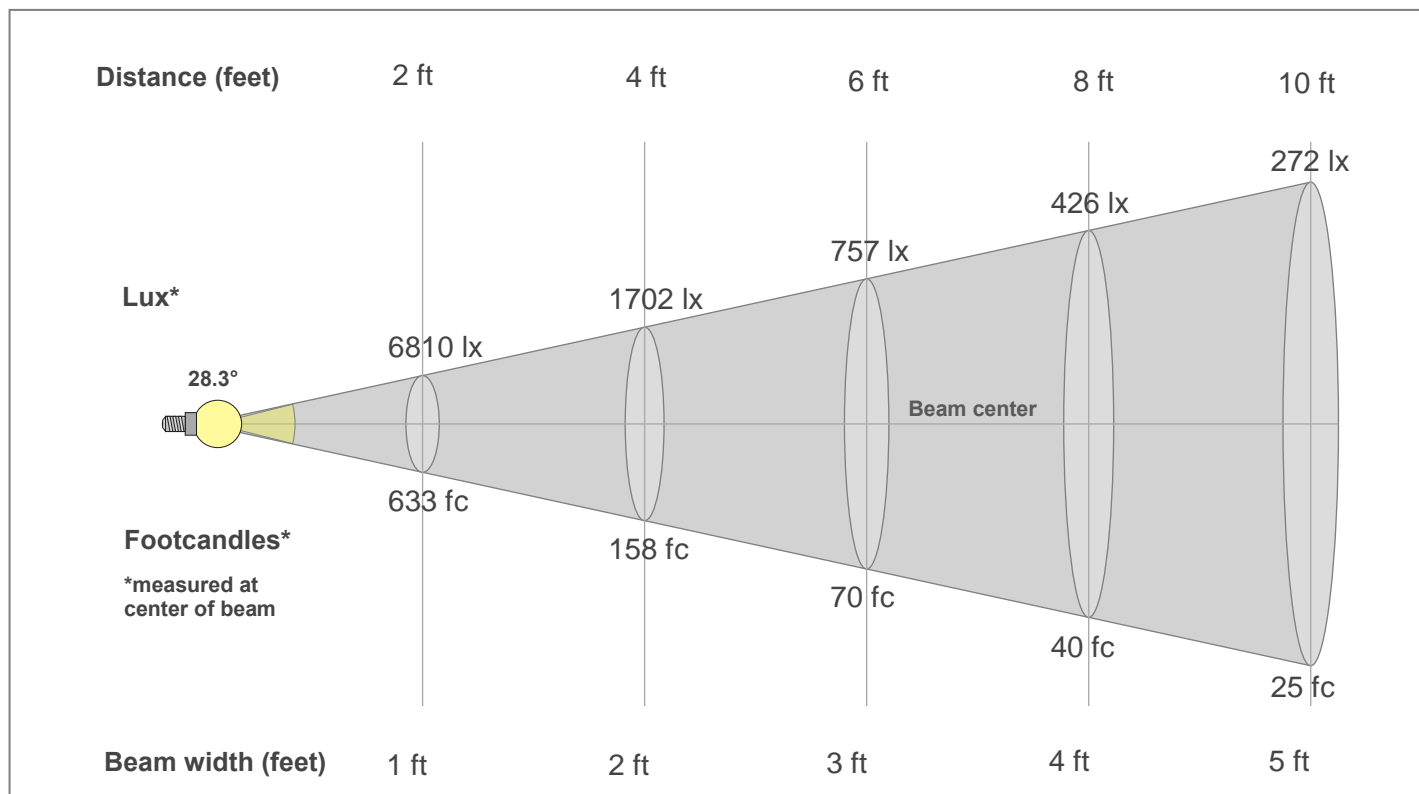

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2531lx	633lx	281lx	158lx	101lx	70lx	52lx	40lx	31lx	25lx	21lx	18lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx	6lx
235.1fc	58.8fc	26.1fc	14.7fc	9.4fc	6.5fc	4.8fc	3.7fc	2.9fc	2.4fc	1.9fc	1.6fc	1.4fc	1.2fc	1fc	0.9fc	0.8fc	0.7fc	0.7fc	0.6fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2531	2498	2392	2227	2021	1790	1543	1296	1061	848	668	518	405	313	246	195	155	122	92	66
100%	99%	95%	88%	80%	71%	61%	51%	42%	34%	26%	20%	16%	12%	10%	8%	6%	5%	4%	3%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2531	2495	2386	2216	2006	1772	1525	1273	1037	825	646	497	386	299	234	184	147	118	92	65
100%	99%	94%	88%	79%	70%	60%	50%	41%	33%	26%	20%	15%	12%	9%	7%	6%	5%	4%	3%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2531	2498	2392	2227	2021	1790	1543	1296	1061	848	668	518	405	313	246	195	155	122	92	66
100%	99%	95%	88%	80%	71%	61%	51%	42%	34%	26%	20%	16%	12%	10%	8%	6%	5%	4%	3%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2531	2495	2386	2216	2006	1772	1525	1273	1037	825	646	497	386	299	234	184	147	118	92	65
100%	99%	94%	88%	79%	70%	60%	50%	41%	33%	26%	20%	15%	12%	9%	7%	6%	5%	4%	3%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
28.3°	55.1°	76.3°	99.7%	99.1%