

Photometric / Colorimetric / Electric Report

Fixture Model:


804S-J2S-WD-15-DIM1-8-350-FS-P-1-WH

Trim Model:

FS-P-1-WH

Date:

4/8/2022

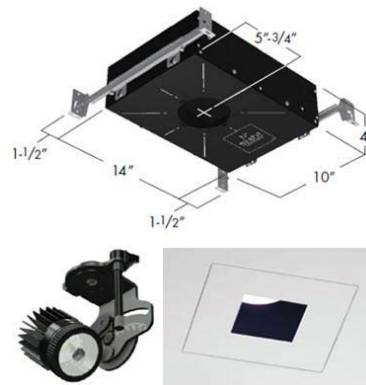

Light efficiency:

51 Lumen/Watt

Light quality:

CRI: 97.0

Color temperature:

3113 K

CIE 1931:

**x: 0.426
y: 0.395**


Output: 735 lm

Peak: 3498 cd



Power: 14.5 W

PF: 0.99


Spectra:

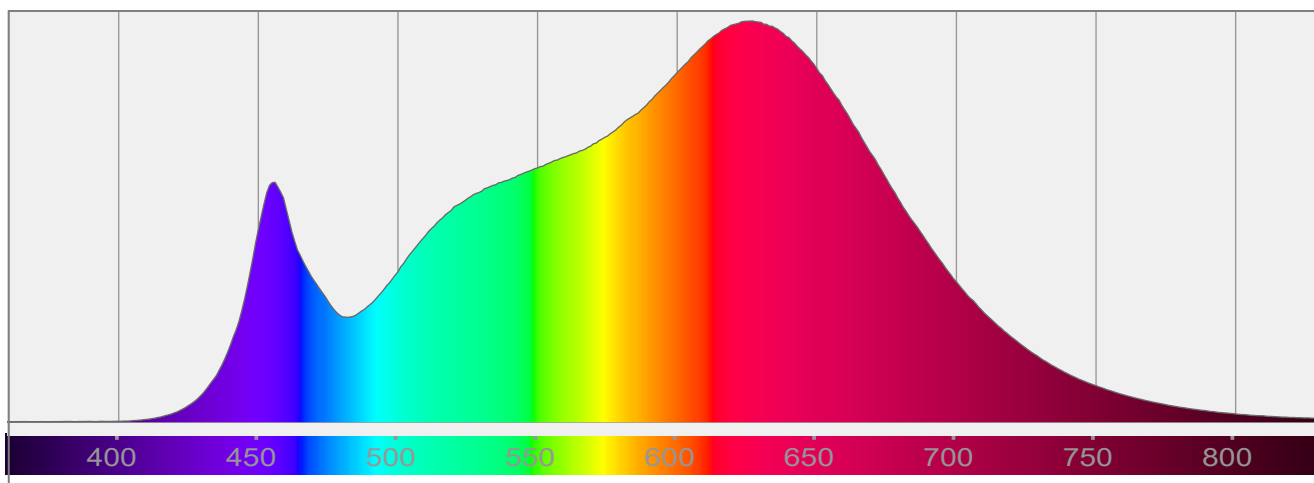


Color Details

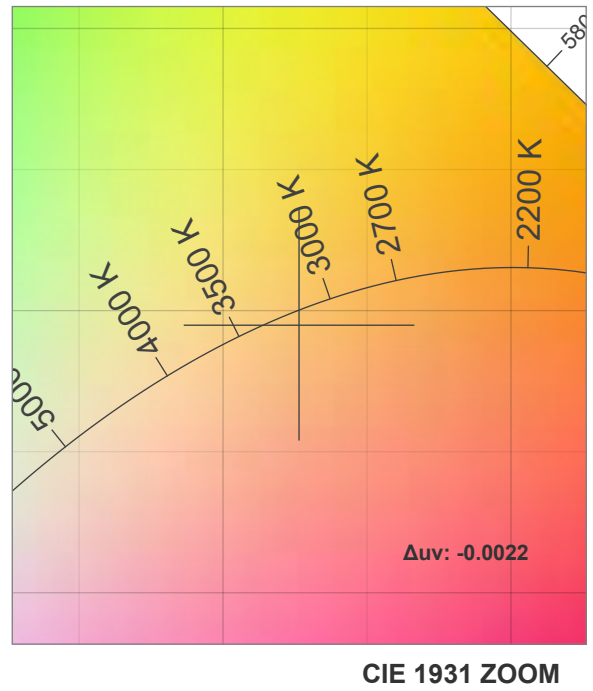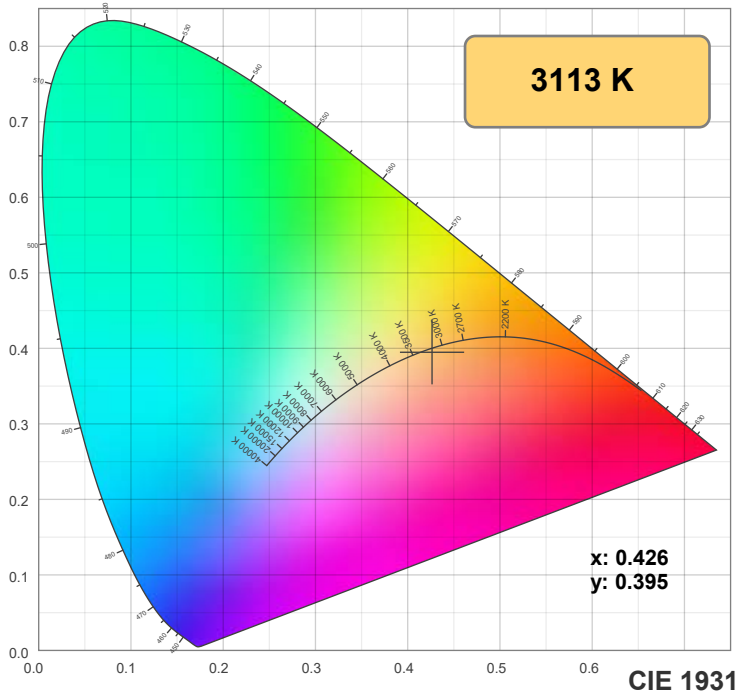

TM-30: 93.3

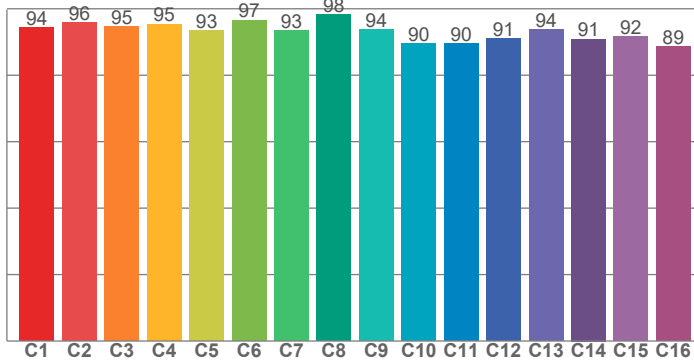

CRI: 97.0 (R1-R8)

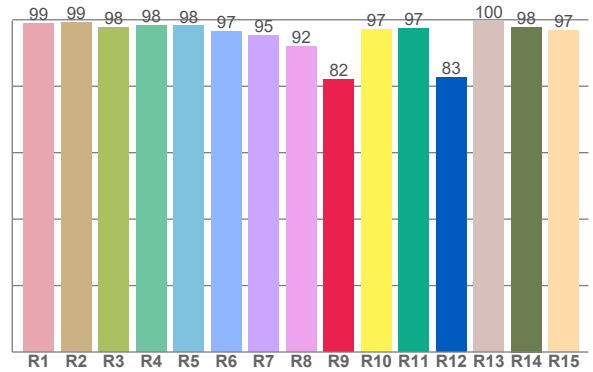

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.8	99.2	97.8	98.3	98.1	96.5	95.4	92.0	82.1	97.2	97.4	82.6	99.6	97.8	96.8


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.4	95.9	94.6	95.4	93.4	96.6	93.5	98.4	93.8	89.5	89.6	91.1	93.8	90.9	91.6	88.6

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.7	96.7	89.9	90.1	93.9	96.4	93.2	94.8	97.8	95.5	95.5	95.6	95.7	93.3	93.1

CQS: 93.8

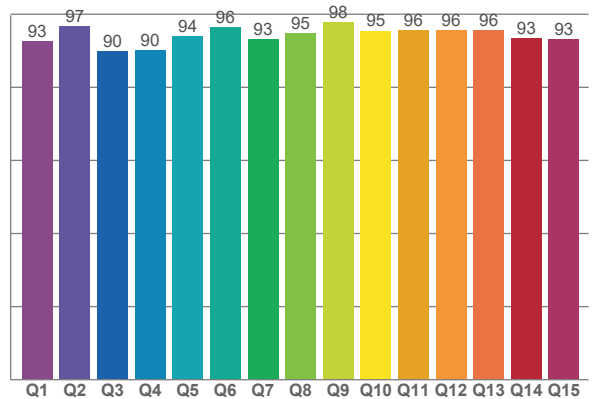

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3113 K	97.0	82.1	93.3	100.6	93.8	0.426	0.395	0.248	0.344	-0.0022

TM-30 Details







Rf 93.3

Fidelity index Rf


Rg 100.6

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	94	-2%	1%
2	96	-1%	1%
3	95	0%	2%
4	95	-2%	0%
5	93	-3%	1%
6	97	1%	1%
7	93	-2%	1%
8	98	0%	0%
9	94	0%	4%
10	90	0%	6%
11	90	3%	7%
12	91	6%	0%
13	94	2%	-4%
14	91	4%	-6%
15	92	0%	-4%
16	89	1%	-9%

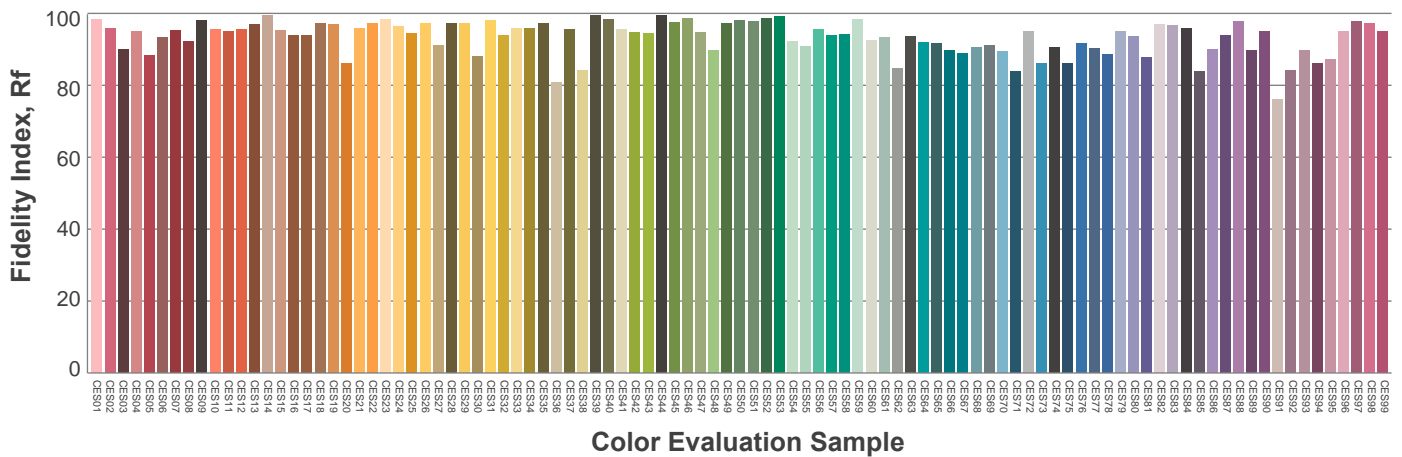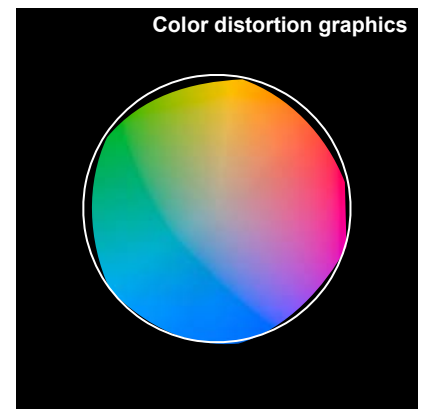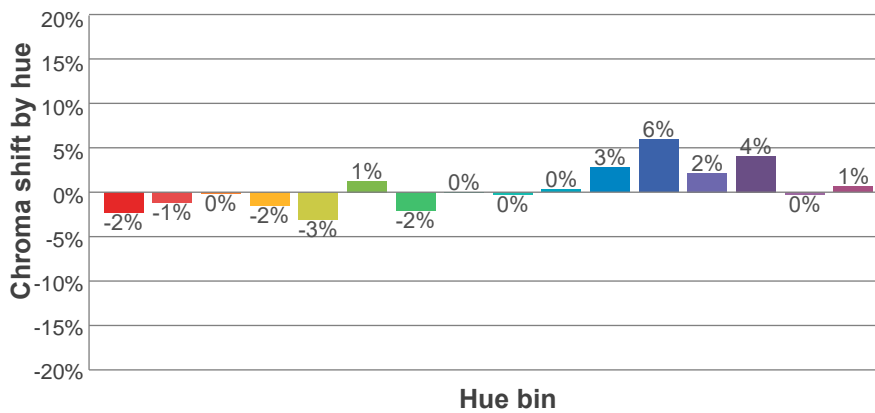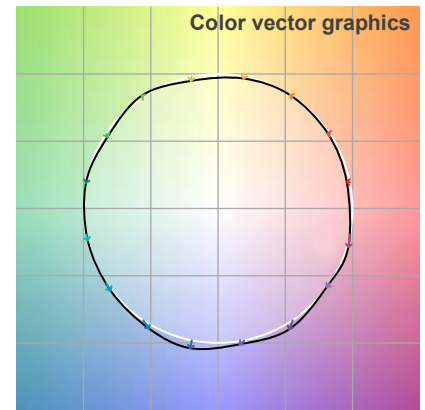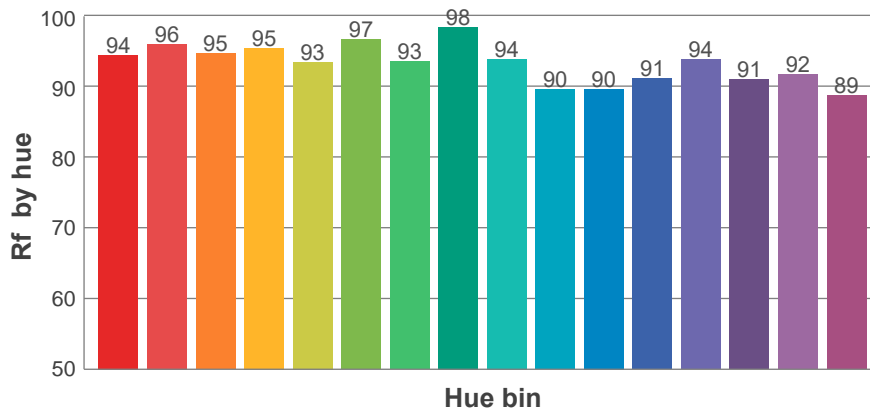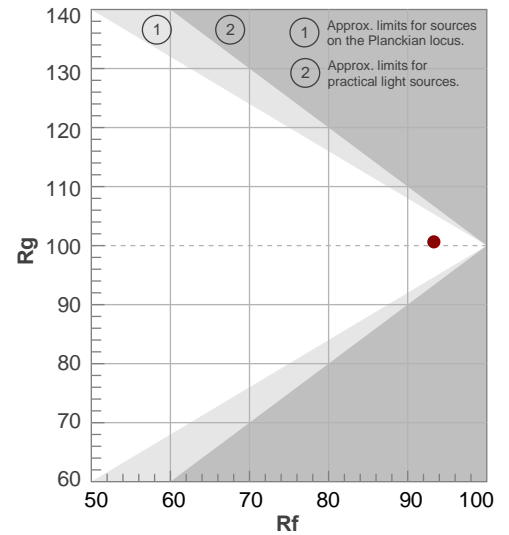

Beam Details

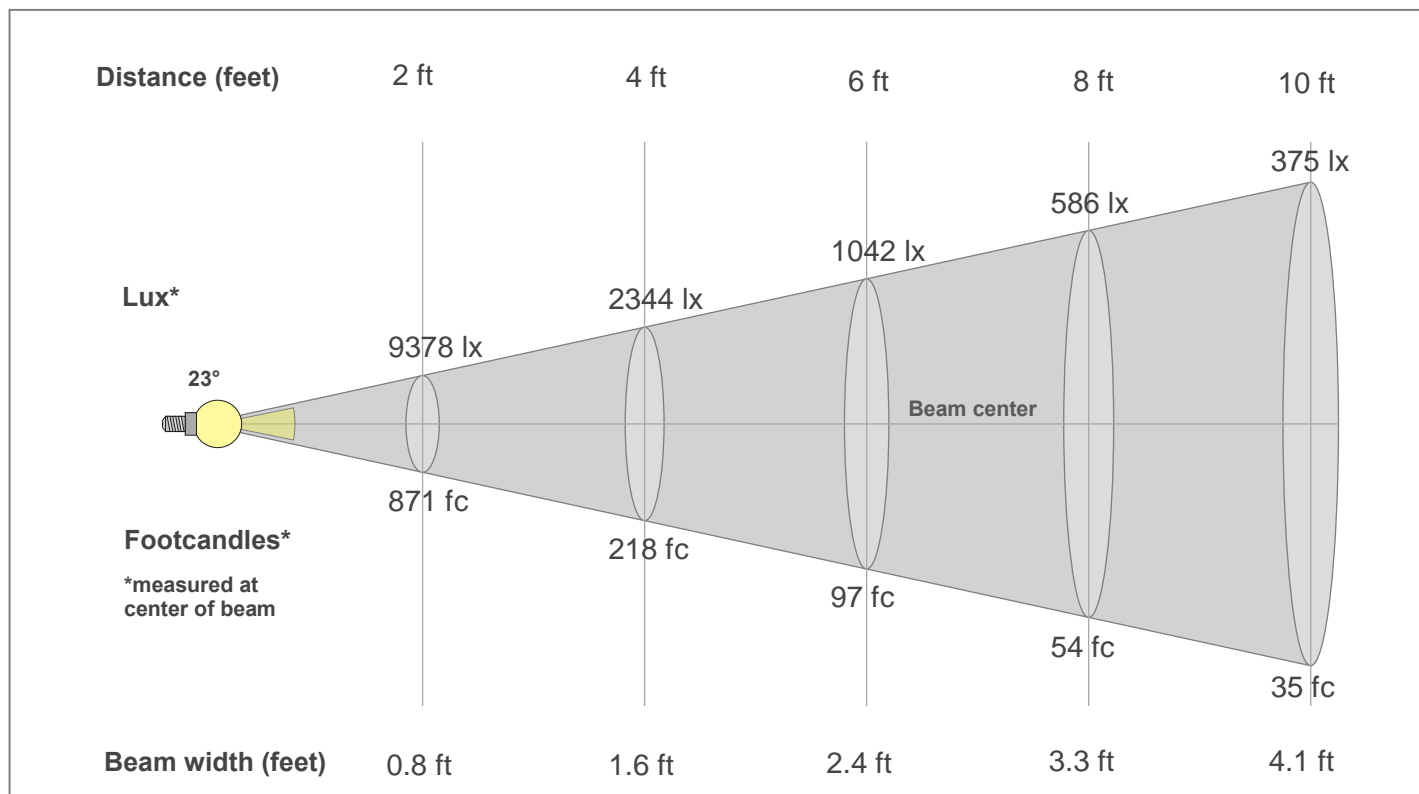

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3485lx	871lx	387lx	218lx	139lx	97lx	71lx	54lx	43lx	35lx	29lx	24lx	21lx	18lx	15lx	14lx	12lx	11lx	10lx	9lx
323.8fc	80.9fc	36fc	20.2fc	13fc	9fc	6.6fc	5.1fc	4fc	3.2fc	2.7fc	2.2fc	1.9fc	1.7fc	1.4fc	1.3fc	1.1fc	1fc	0.9fc	0.8fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3485	3426	3222	2903	2497	2056	1630	1271	988	766	588	444	330	241	160	99	63	37	21	14
100%	98%	92%	83%	72%	59%	47%	36%	28%	22%	17%	13%	9%	7%	5%	3%	2%	1%	1%	0%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3485	3418	3263	2969	2575	2107	1654	1256	956	740	575	436	319	226	158	100	55	30	20	14
100%	98%	94%	85%	74%	60%	47%	36%	27%	21%	16%	13%	9%	6%	5%	3%	2%	1%	1%	0%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3485	3426	3222	2903	2497	2056	1630	1271	988	766	588	444	330	241	160	99	63	37	21	14
100%	98%	92%	83%	72%	59%	47%	36%	28%	22%	17%	13%	9%	7%	5%	3%	2%	1%	1%	0%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3485	3418	3263	2969	2575	2107	1654	1256	956	740	575	436	319	226	158	100	55	30	20	14
100%	98%	94%	85%	74%	60%	47%	36%	27%	21%	16%	13%	9%	6%	5%	3%	2%	1%	1%	0%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
23°	47.1°	61.1°	99.5%	99.4%