

## Photometric / Colorimetric / Electric Report

Fixture Model:


**804S-J2S-WD-25-DIM1-8-350-FS-P-1-WH**

Trim Model:

**FS-P-1-WH**

Date:

**4/8/2022**

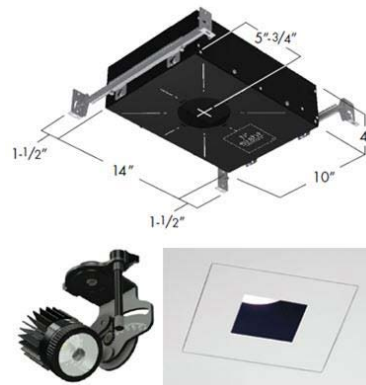

Light efficiency:

**41 Lumen/Watt**

Light quality:

**CRI: 97.0**

Color temperature:

**3112 K**

CIE 1931:

**x: 0.426  
y: 0.394**


**Output: 602 lm**

**Peak: 2136 cd**



**Power: 14.5 W**

**PF: 0.99**


Spectra:

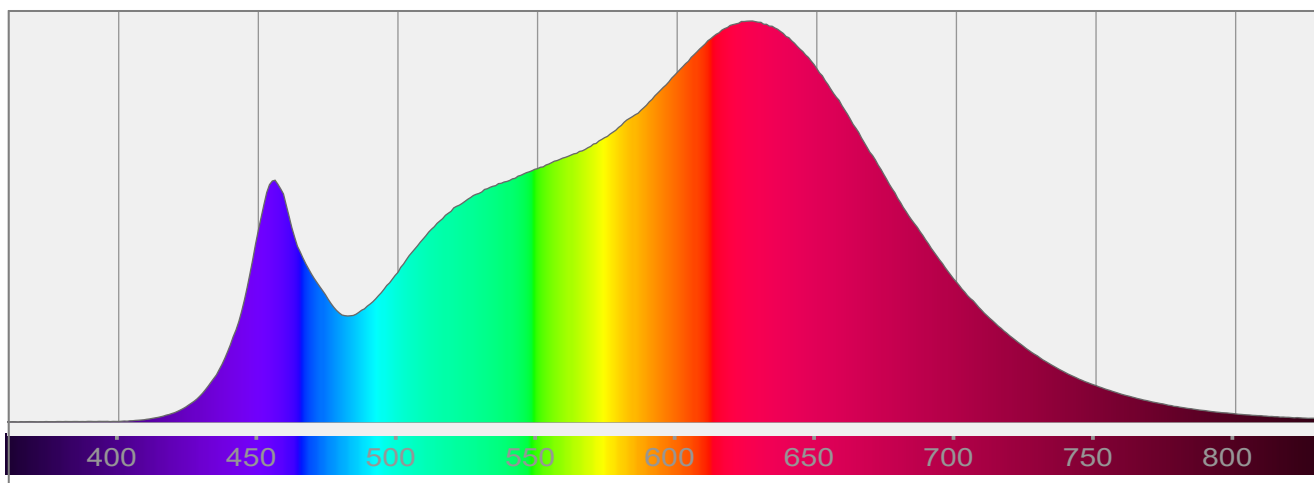


## Color Details

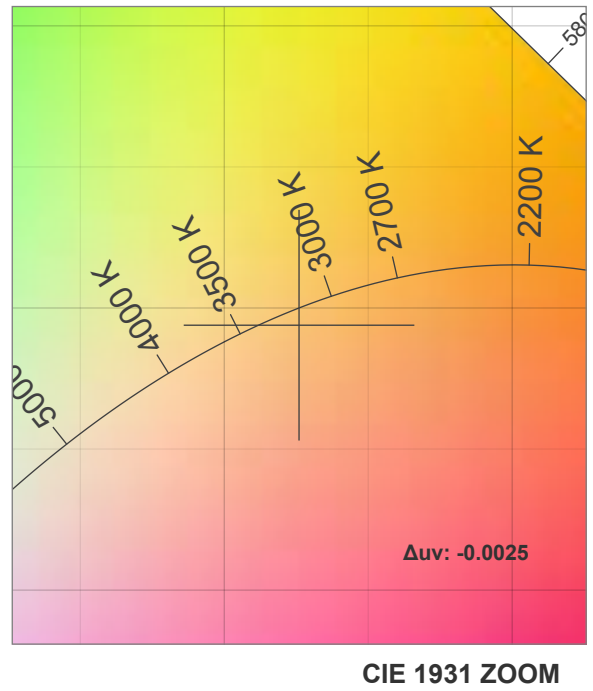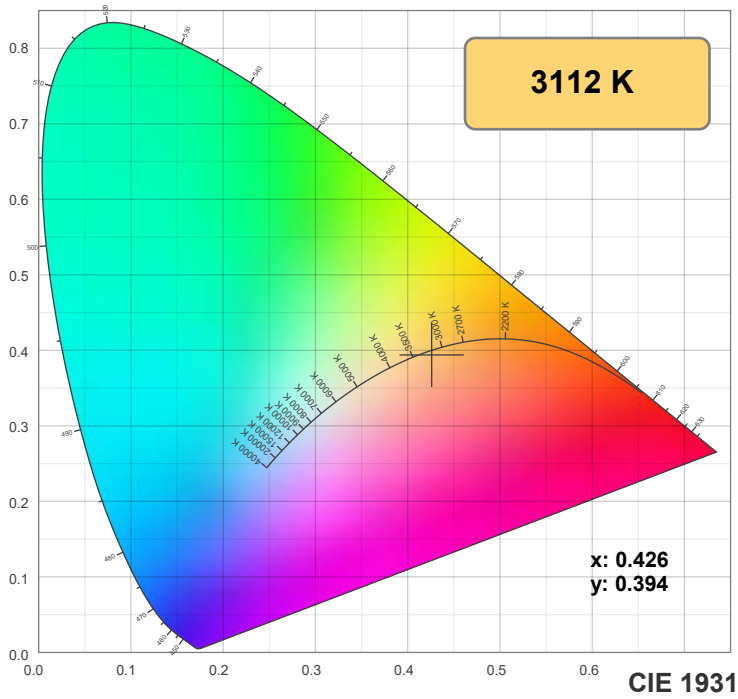

**TM-30: 93.3**

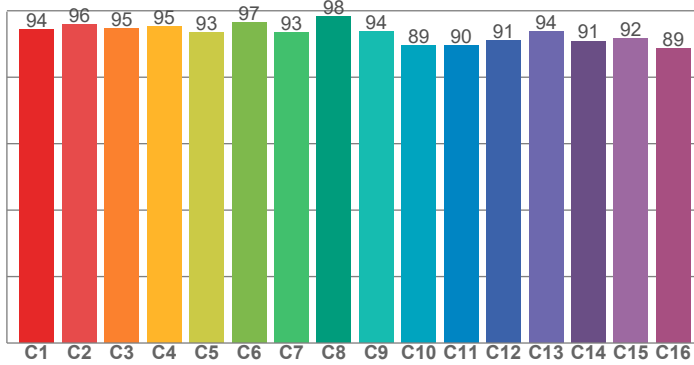

**CRI: 97.0 (R1-R8)**

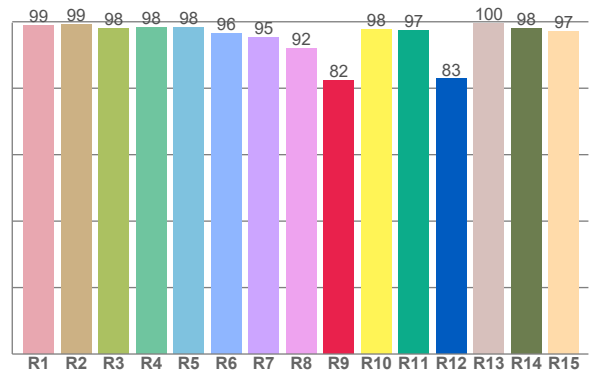

**CRI R Values:**

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.9	99.2	98.0	98.2	98.2	96.3	95.2	91.9	82.4	97.6	97.4	82.8	99.5	98.0	97.0


**TM30 C Values:**

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.4	95.9	94.5	95.4	93.4	96.5	93.4	98.3	93.8	89.5	89.6	91.0	93.7	90.9	91.6	88.7

**CQS Q values:**

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.7	96.7	89.9	90.0	93.8	96.4	93.1	94.6	97.8	95.5	95.4	95.4	95.5	93.3	93.1

**CQS: 93.7**

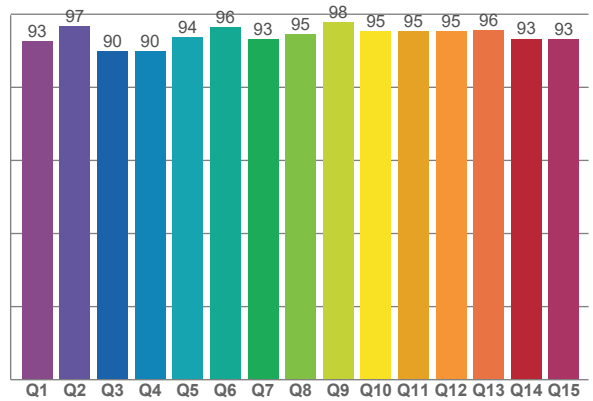

**Color Parameters:**

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3112 K	97.0	82.4	93.3	100.7	93.7	0.426	0.394	0.248	0.344	-0.0025

# TM-30 Details







**Rf 93.3**

Fidelity index Rf


**Rg 100.7**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	94	-2%	1%
2	96	-1%	1%
3	95	0%	2%
4	95	-1%	0%
5	93	-3%	1%
6	97	1%	1%
7	93	-2%	1%
8	98	0%	0%
9	94	0%	4%
10	89	0%	6%
11	90	3%	7%
12	91	6%	0%
13	94	2%	-4%
14	91	4%	-6%
15	92	0%	-4%
16	89	1%	-9%

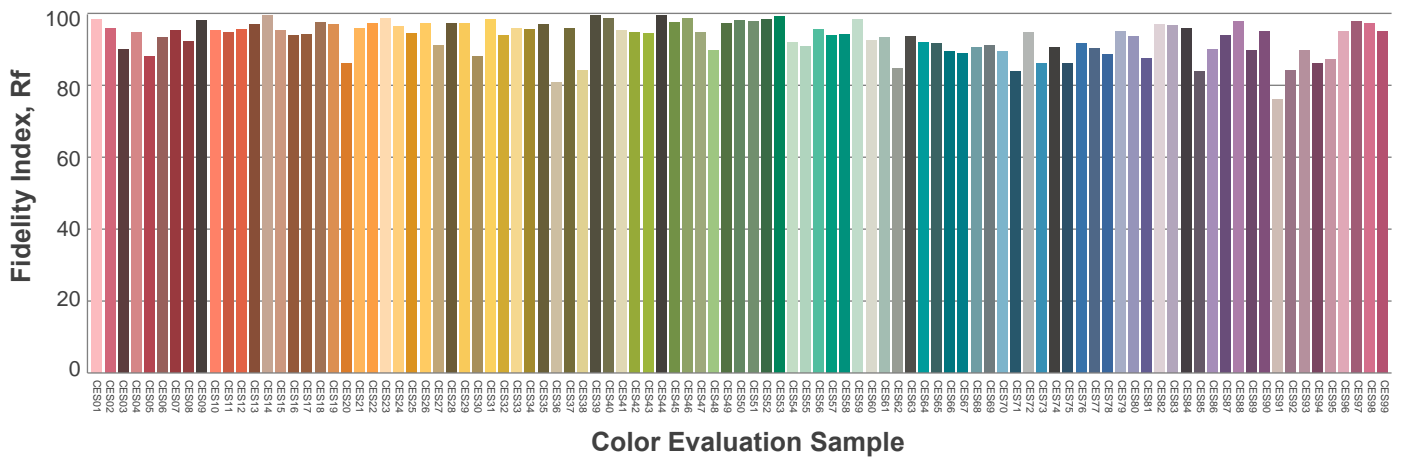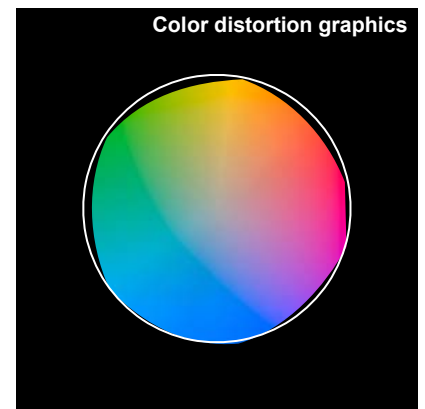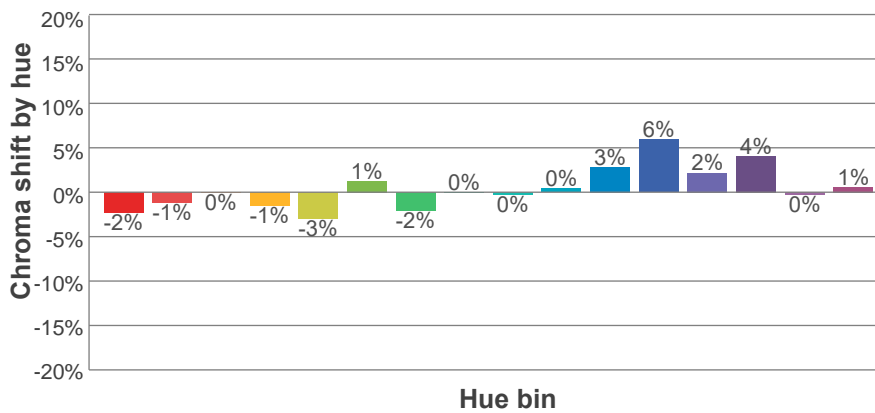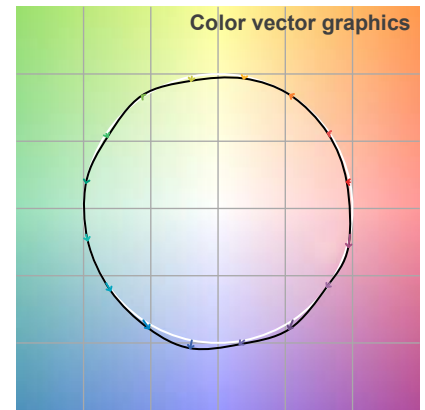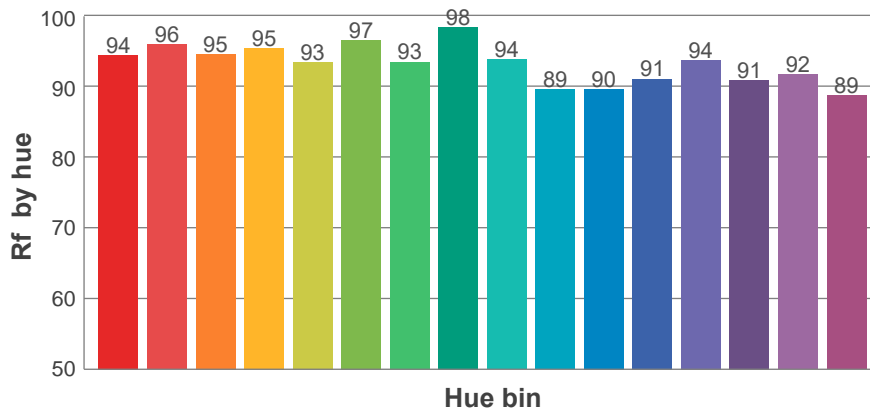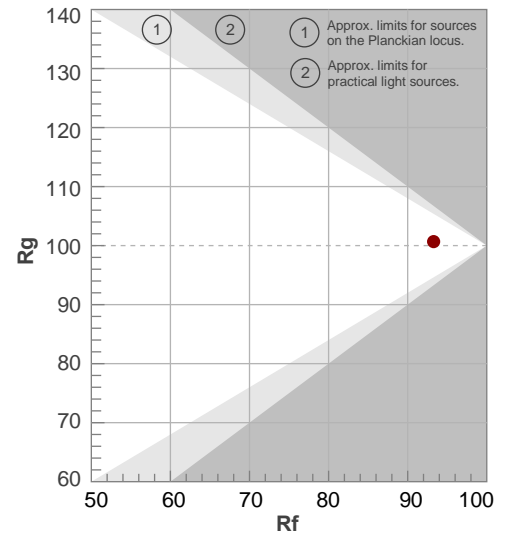

## Beam Details

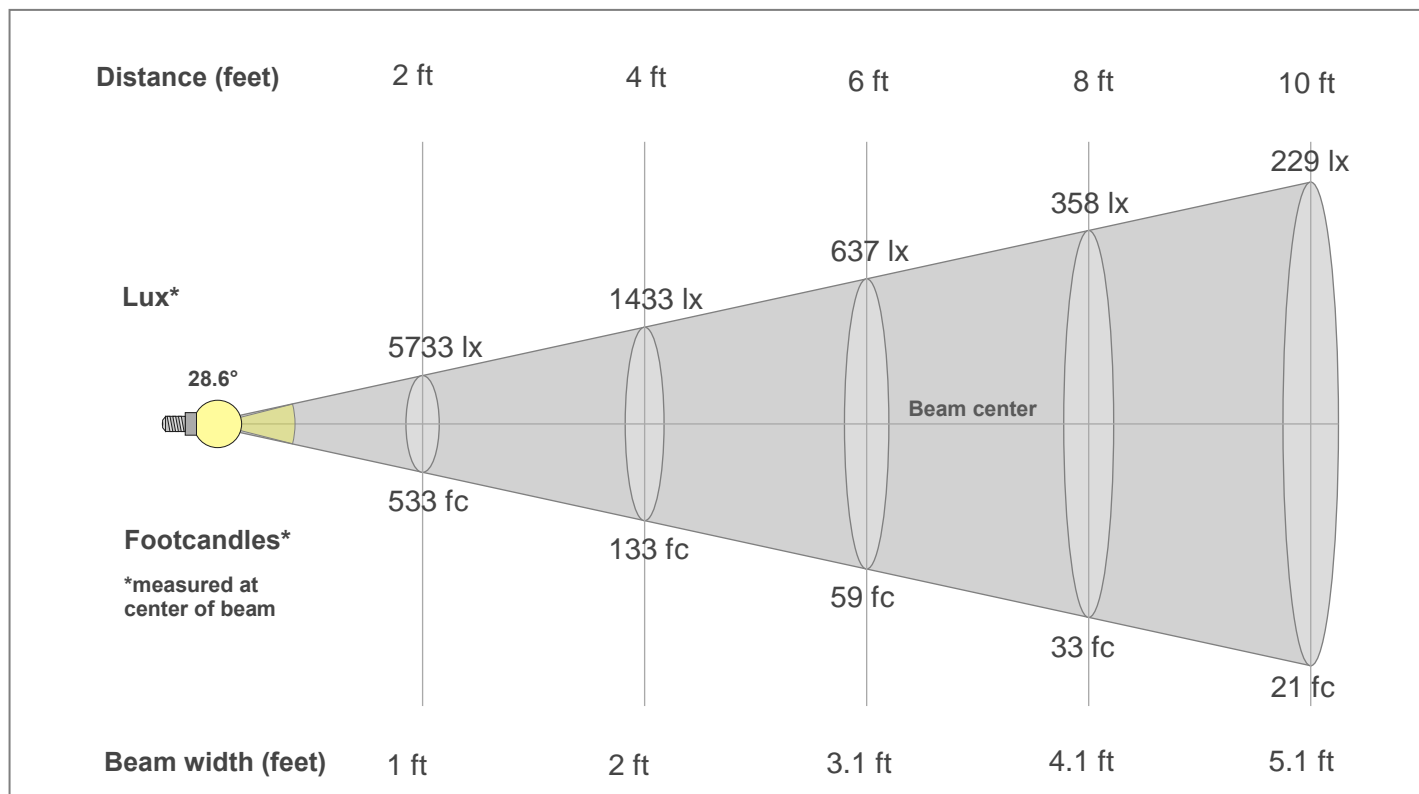

### Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2130lx	533lx	237lx	133lx	85lx	59lx	43lx	33lx	26lx	21lx	18lx	15lx	13lx	11lx	9lx	8lx	7lx	7lx	6lx	5lx
197.9fc	49.5fc	22fc	12.4fc	7.9fc	5.5fc	4fc	3.1fc	2.4fc	2fc	1.6fc	1.4fc	1.2fc	1fc	0.9fc	0.8fc	0.7fc	0.6fc	0.5fc	0.5fc

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2130	2106	2012	1871	1698	1504	1301	1096	902	726	570	432	321	232	159	105	66	40	24	14
100%	99%	94%	88%	80%	71%	61%	51%	42%	34%	27%	20%	15%	11%	7%	5%	3%	2%	1%	1%

### Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2130	2101	2017	1882	1712	1513	1305	1094	893	716	564	434	322	229	157	103	64	38	22	14
100%	99%	95%	88%	80%	71%	61%	51%	42%	34%	26%	20%	15%	11%	7%	5%	3%	2%	1%	1%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2130	2106	2012	1871	1698	1504	1301	1096	902	726	570	432	321	232	159	105	66	40	24	14
100%	99%	94%	88%	80%	71%	61%	51%	42%	34%	27%	20%	15%	11%	7%	5%	3%	2%	1%	1%

### Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2130	2101	2017	1882	1712	1513	1305	1094	893	716	564	434	322	229	157	103	64	38	22	14
100%	99%	95%	88%	80%	71%	61%	51%	42%	34%	26%	20%	15%	11%	7%	5%	3%	2%	1%	1%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
28.6°	52.9°	65.6°	99.6%	99.4%