

Photometric / Colorimetric / Electric Report

Fixture Model:

805-J5-WD-4-40-PR1-8.5-350-FR-LG-P-1-WH-NL

Trim Model:

FR-LG-P-1-WH/NL

Date:

8/2/2024



Light efficiency:

64 Lumen/Watt

Light quality:

CRI: 96.6

Color temperature:

2997 K

CIE 1931:

x: 0.436
y: 0.402


Output: 937 lm

Peak: 1875 cd



Power: 14.6 W

PF: 0.99


Spectra:

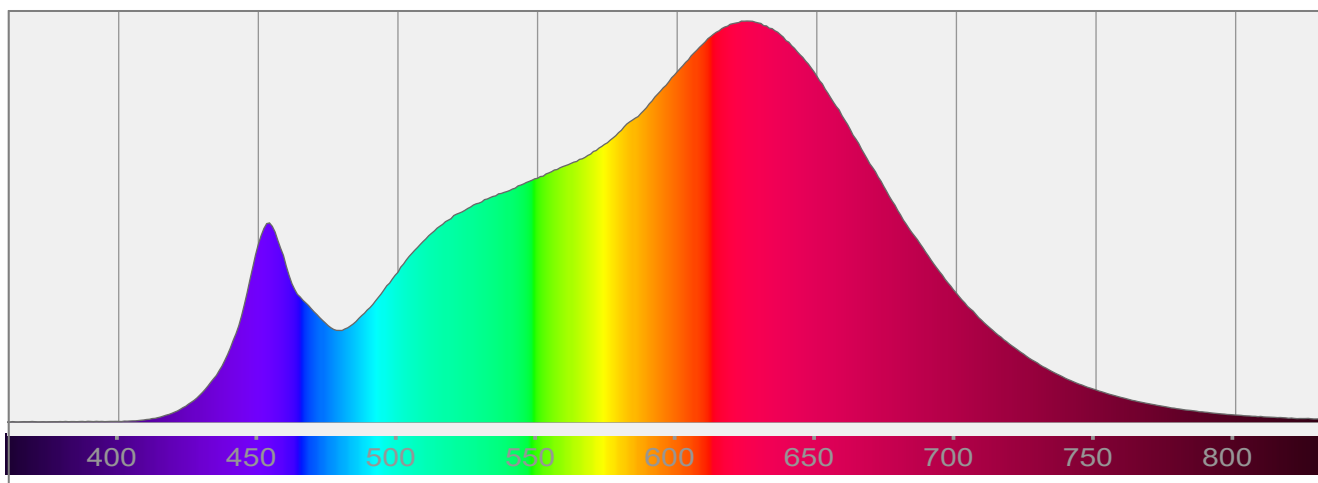


Color Details

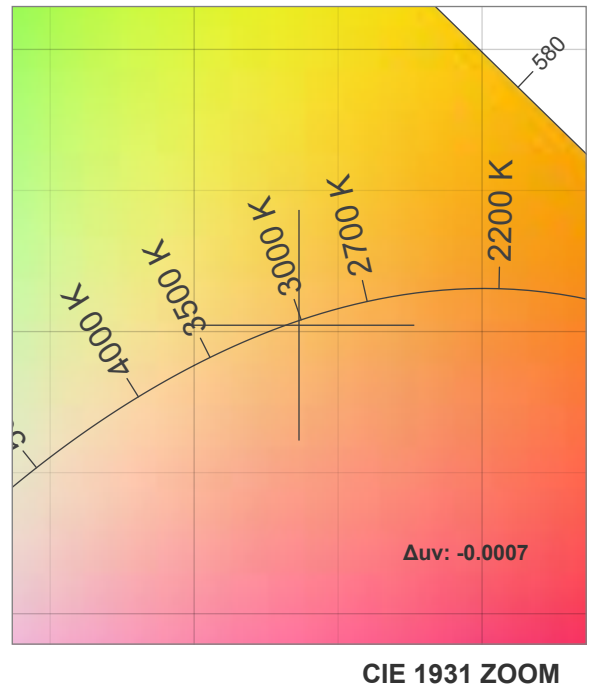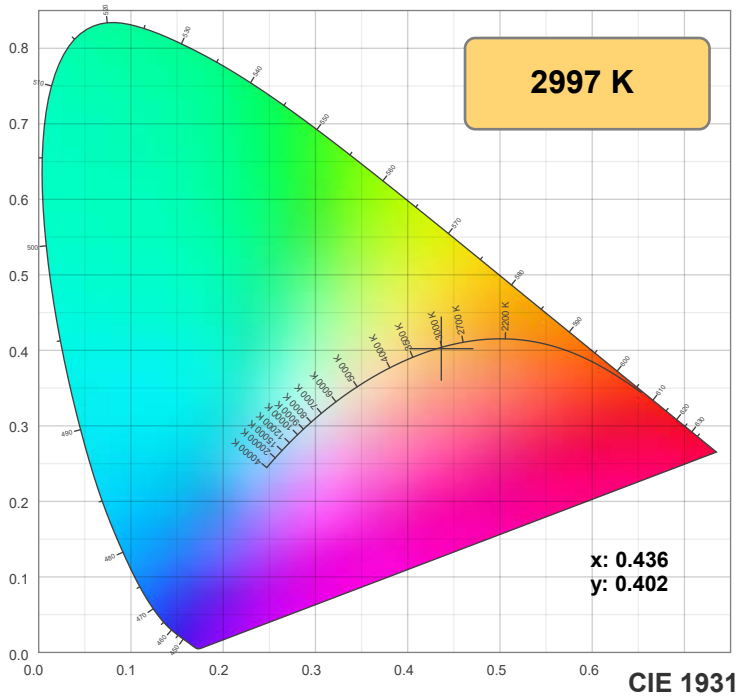

TM-30: 94.1

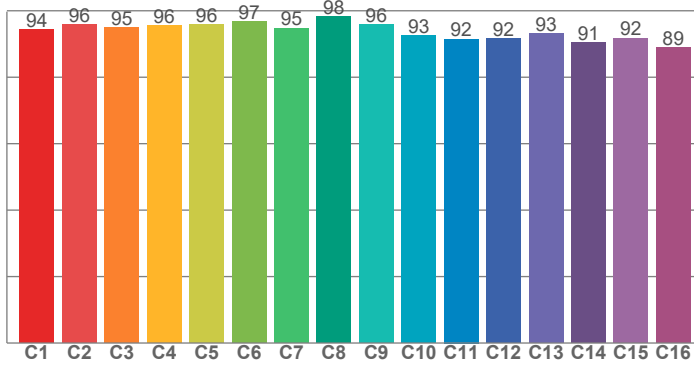

CRI: 96.6 (R1-R8)

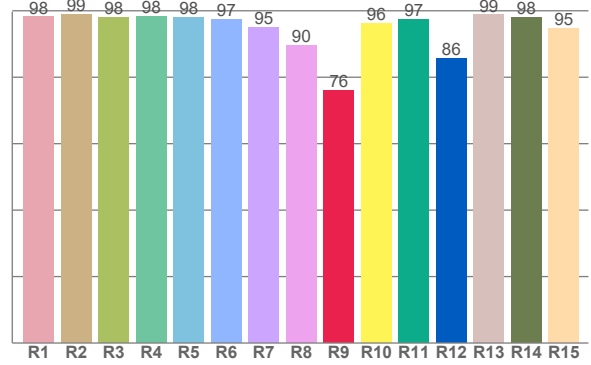

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.1	98.9	98.1	98.3	97.9	97.3	95.0	89.6	76.0	96.2	97.4	85.7	98.8	98.0	94.6


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.3	95.9	94.8	95.5	95.8	96.7	94.8	98.3	96.0	92.7	91.5	91.6	93.1	90.5	91.8	88.9

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91.7	96.2	91.6	92.5	95.6	96.0	93.9	95.3	98.1	96.0	96.5	96.4	96.1	91.8	91.7

CQS: 94.1

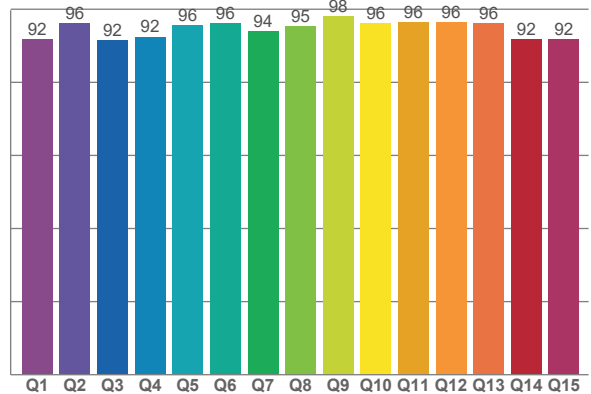

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2997 K	96.6	76.0	94.1	100.4	94.1	0.436	0.402	0.251	0.347	-0.0007

TM-30 Details







Rf 94.1

Fidelity index Rf


Rg 100.4

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	94	-3%	0%
2	96	-2%	1%
3	95	0%	2%
4	96	-2%	0%
5	96	-1%	2%
6	97	1%	1%
7	95	-1%	0%
8	98	1%	0%
9	96	0%	2%
10	93	0%	5%
11	92	2%	6%
12	92	4%	0%
13	93	2%	-5%
14	91	3%	-7%
15	92	-1%	-4%
16	89	0%	-9%

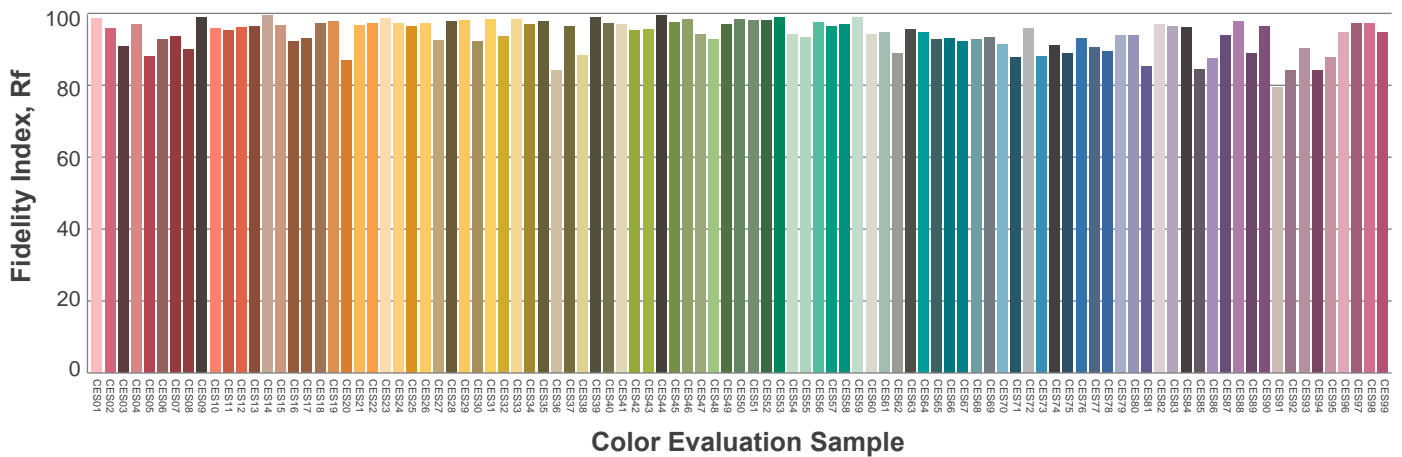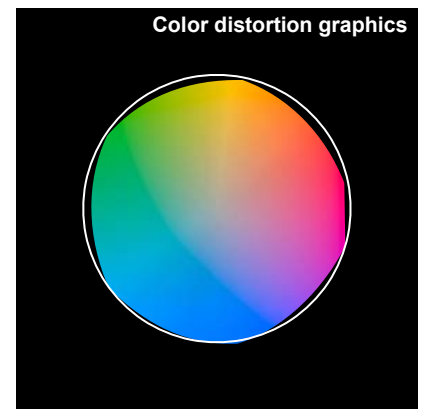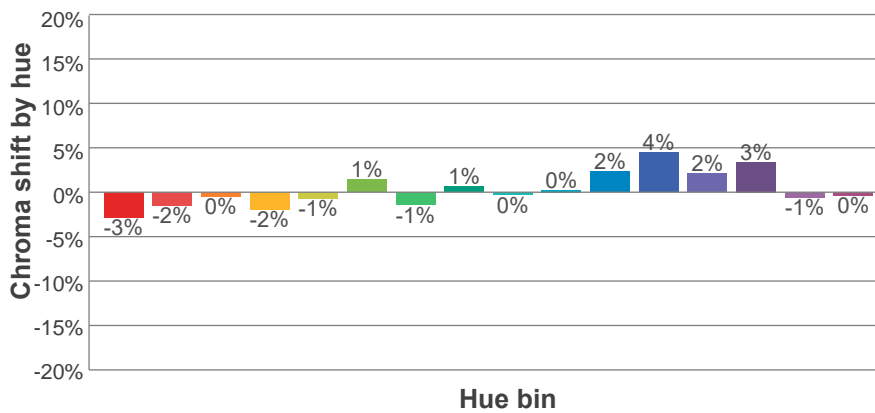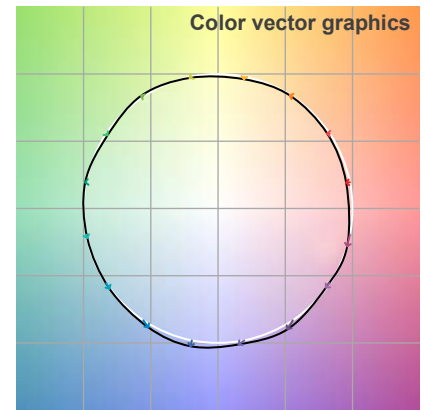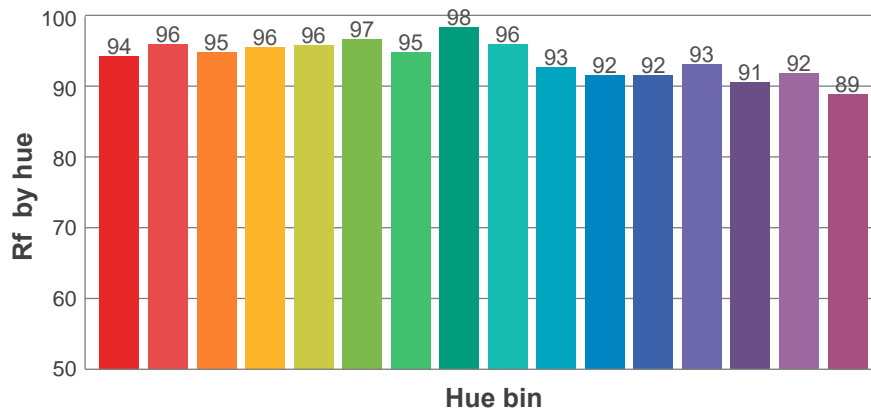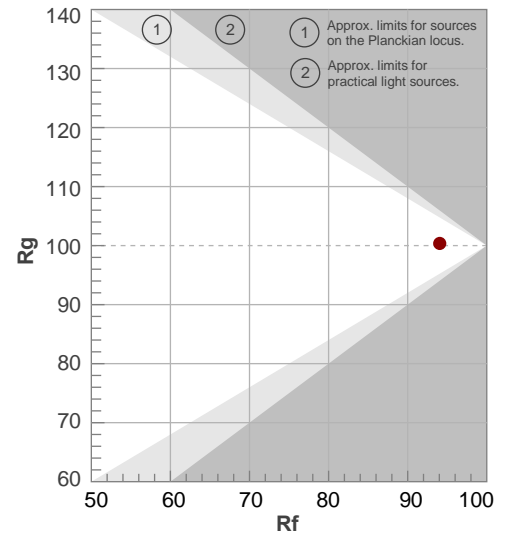

Beam Details

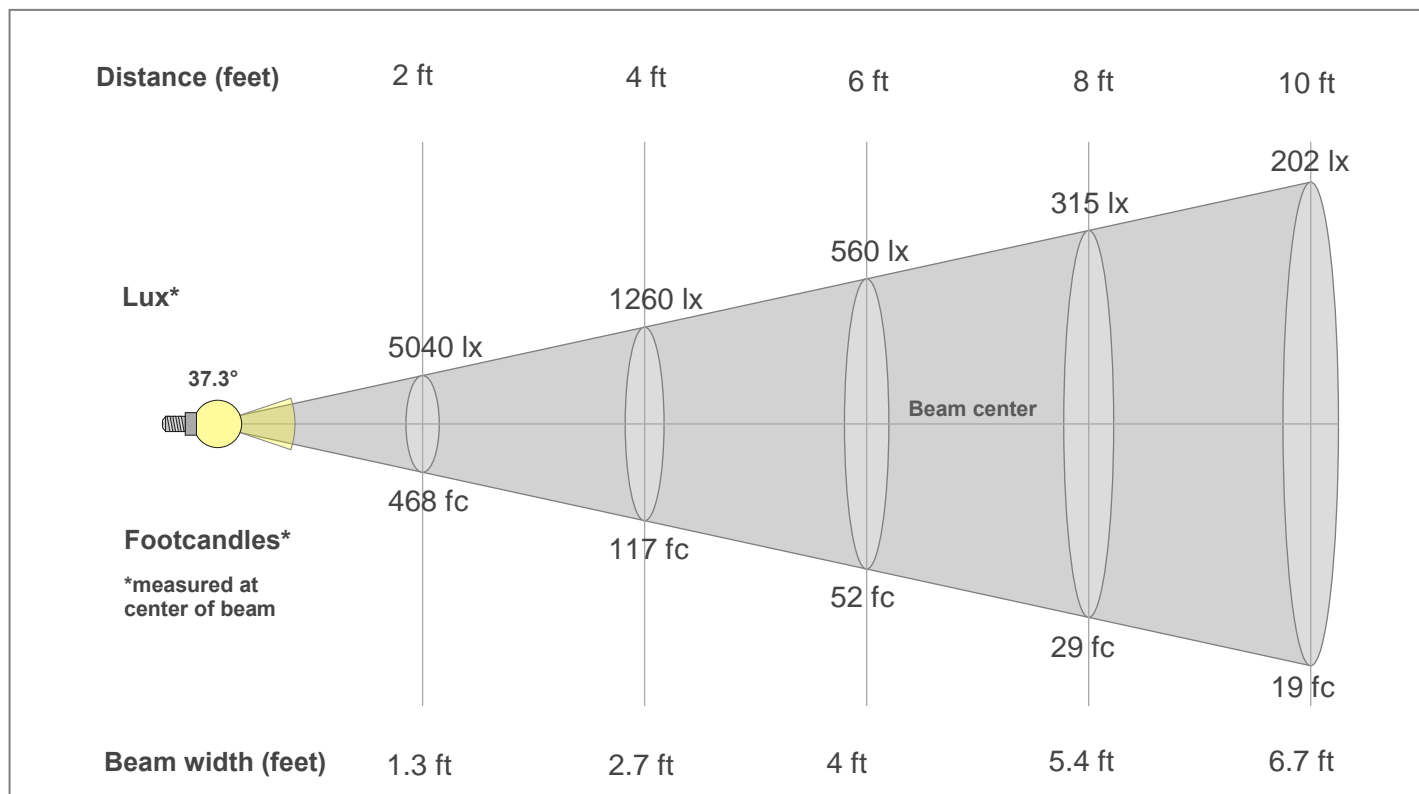

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1873lx	468lx	208lx	117lx	75lx	52lx	38lx	29lx	23lx	19lx	15lx	13lx	11lx	10lx	8lx	7lx	6lx	6lx	5lx	5lx
174fc	43.5fc	19.3fc	10.9fc	7fc	4.8fc	3.6fc	2.7fc	2.1fc	1.7fc	1.4fc	1.2fc	1fc	0.9fc	0.8fc	0.7fc	0.6fc	0.5fc	0.5fc	0.4fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1873	1861	1818	1748	1654	1542	1416	1279	1133	985	842	710	595	493	409	336	275	223	180	144
100%	99%	97%	93%	88%	82%	76%	68%	60%	53%	45%	38%	32%	26%	22%	18%	15%	12%	10%	8%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1873	1857	1814	1743	1650	1539	1412	1274	1128	980	839	708	591	488	404	332	271	219	177	142
100%	99%	97%	93%	88%	82%	75%	68%	60%	52%	45%	38%	32%	26%	22%	18%	14%	12%	9%	8%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1873	1861	1818	1748	1654	1542	1416	1279	1133	985	842	710	595	493	409	336	275	223	180	144
100%	99%	97%	93%	88%	82%	76%	68%	60%	53%	45%	38%	32%	26%	22%	18%	15%	12%	10%	8%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1873	1857	1814	1743	1650	1539	1412	1274	1128	980	839	708	591	488	404	332	271	219	177	142
100%	99%	97%	93%	88%	82%	75%	68%	60%	52%	45%	38%	32%	26%	22%	18%	14%	12%	9%	8%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
37.3°	71.1°	94.4°	99.4%	96.1%