

Photometric / Colorimetric / Electric Report

Fixture Model:


804S-K2S-WD-40-DIM1-8-350-FR-LG-P-1-WH-NL

Trim Model:

FR-LG-P-1-WH-NL

Date:

3/24/2022

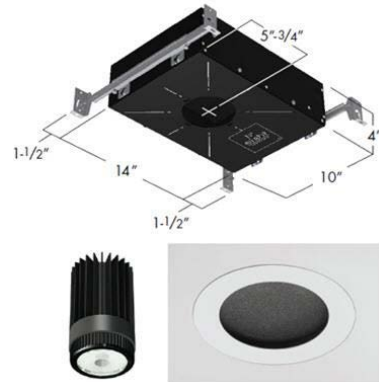

Light efficiency:

63 Lumen/Watt

Light quality:

CRI: 96.6

Color temperature:

3095 K

CIE 1931:

**x: 0.430
y: 0.401**


Output: 921 lm

Peak: 1741 cd



Power: 14.6 W

PF: 1.0


Spectra:

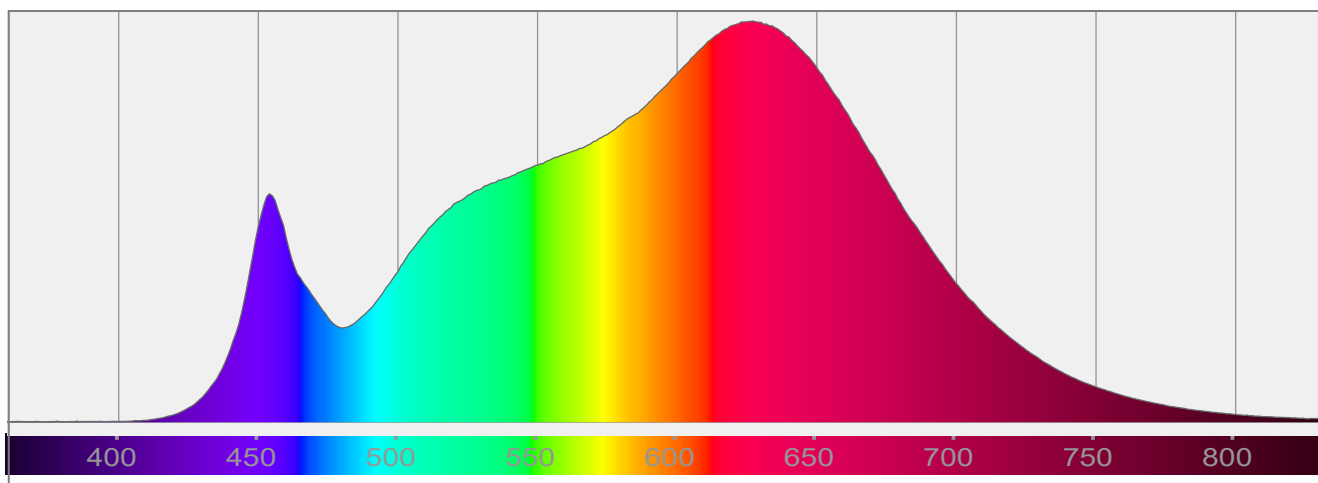


Color Details

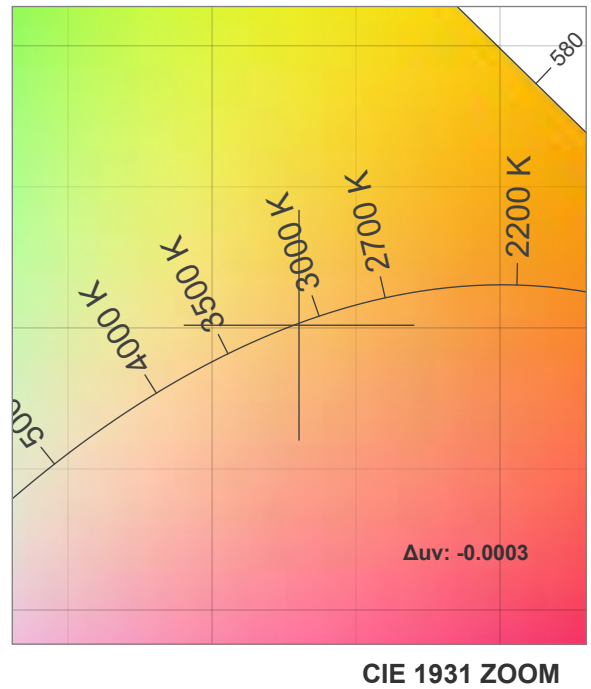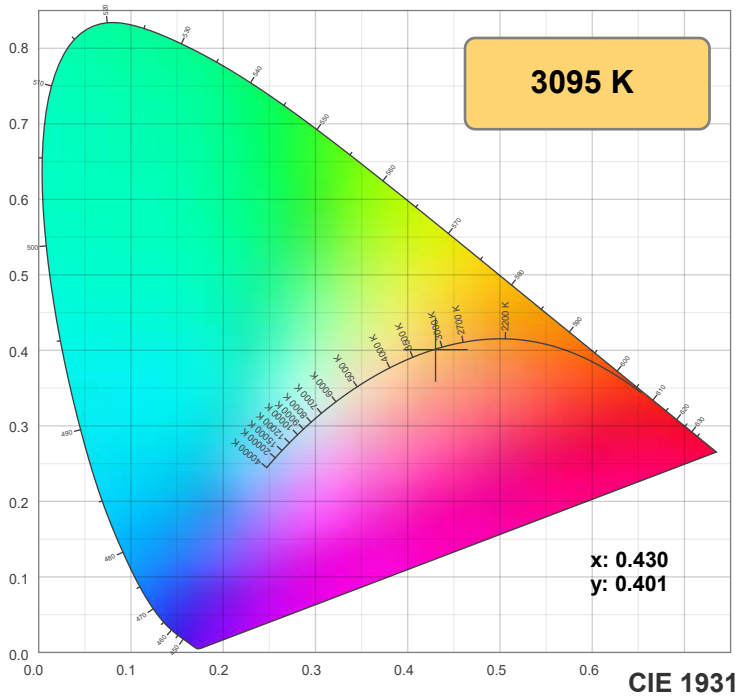

TM-30: 93.4

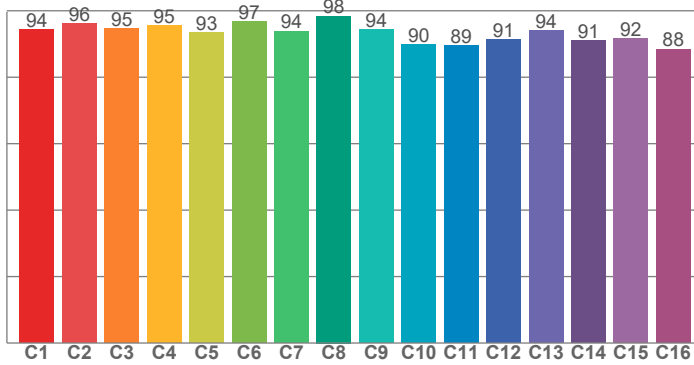

CRI: 96.6 (R1-R8)

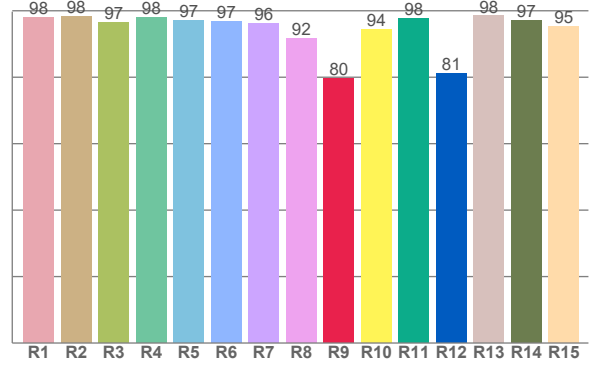

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.0	98.3	96.6	98.1	97.2	96.9	96.2	91.6	79.6	94.3	97.6	81.2	98.4	97.1	95.3


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.4	96.0	94.6	95.5	93.4	96.7	93.9	98.4	94.4	89.9	89.4	91.3	94.1	90.9	91.7	88.4

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.5	96.7	90.0	90.6	94.3	95.7	93.6	95.5	97.4	95.6	96.2	96.6	96.7	93.0	92.9

CQS: 93.9

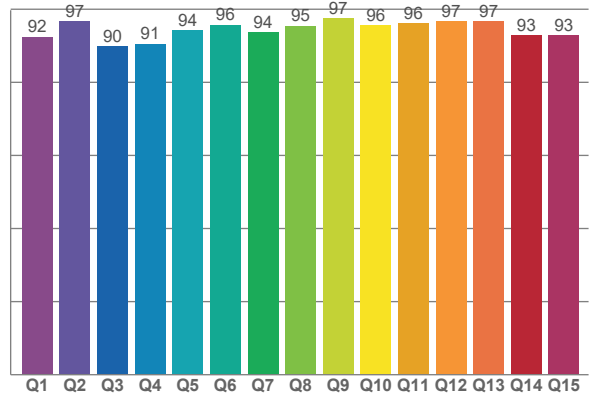

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3095 K	96.6	79.6	93.4	100.4	93.9	0.430	0.401	0.248	0.346	-0.0003

TM-30 Details







Rf 93.4

Fidelity index Rf


Rg 100.4

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	94	-2%	0%
2	96	-1%	1%
3	95	-1%	2%
4	95	-2%	0%
5	93	-3%	2%
6	97	1%	1%
7	94	-2%	1%
8	98	0%	0%
9	94	-1%	4%
10	90	0%	6%
11	89	2%	7%
12	91	6%	1%
13	94	2%	-3%
14	91	4%	-6%
15	92	0%	-4%
16	88	1%	-9%

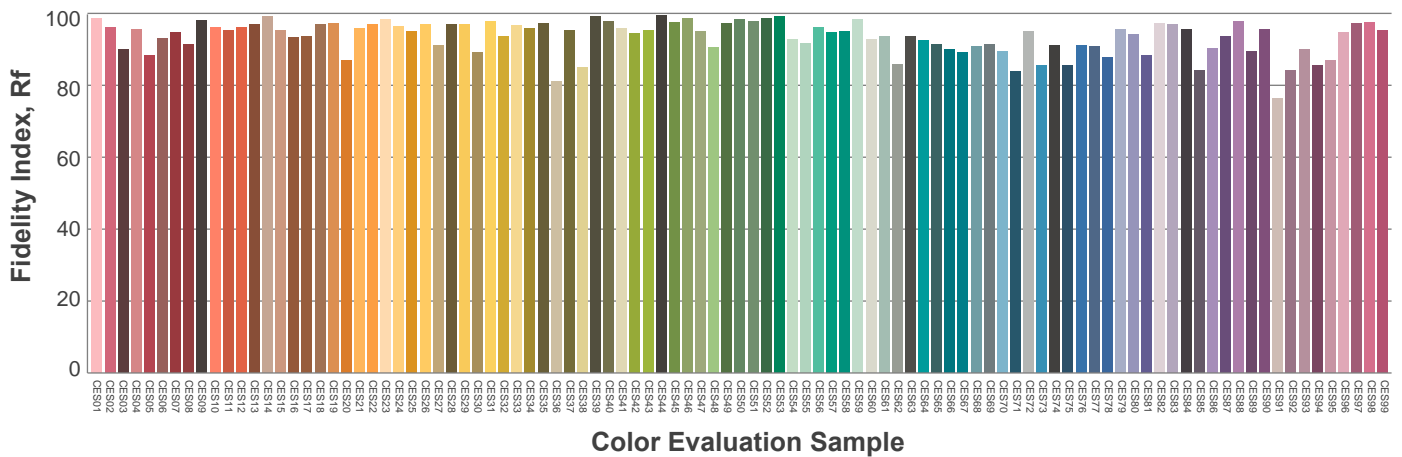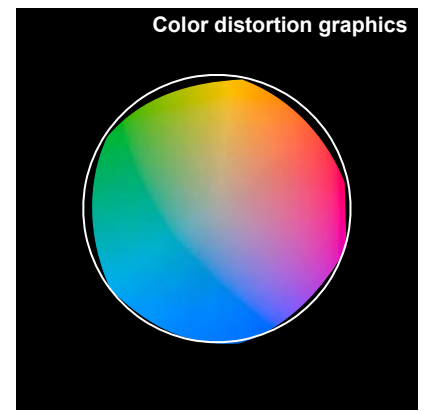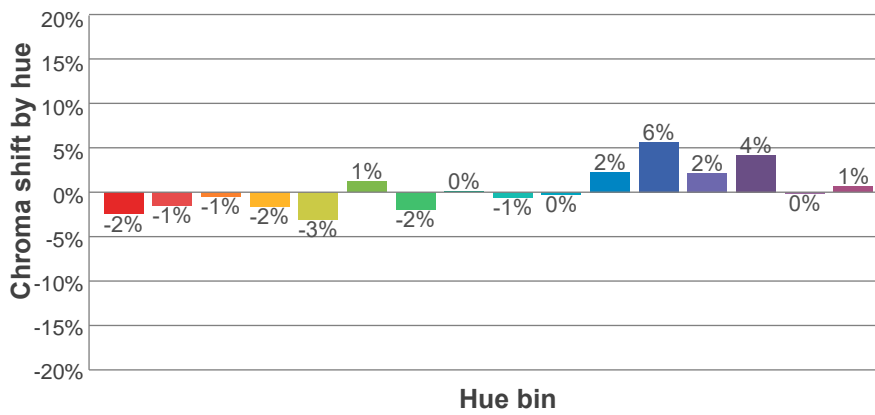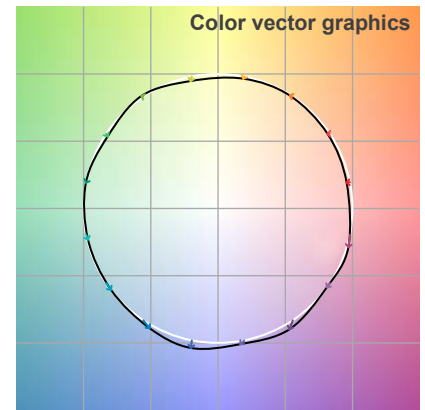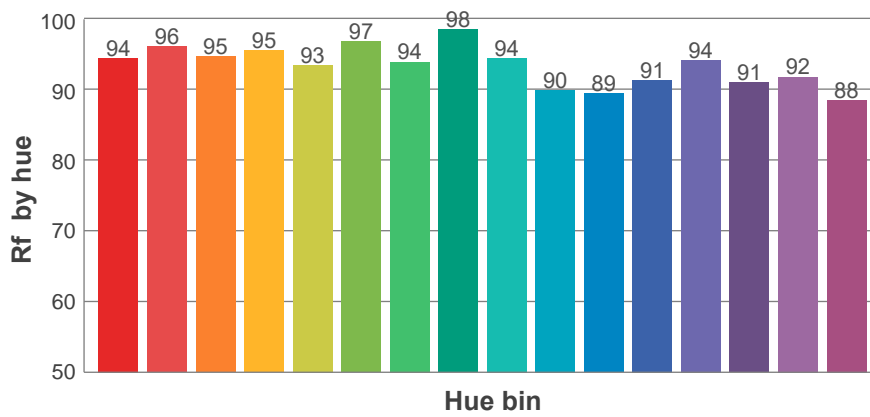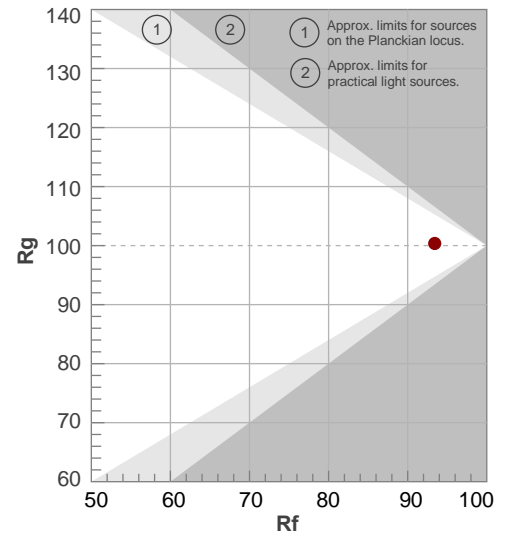

Beam Details

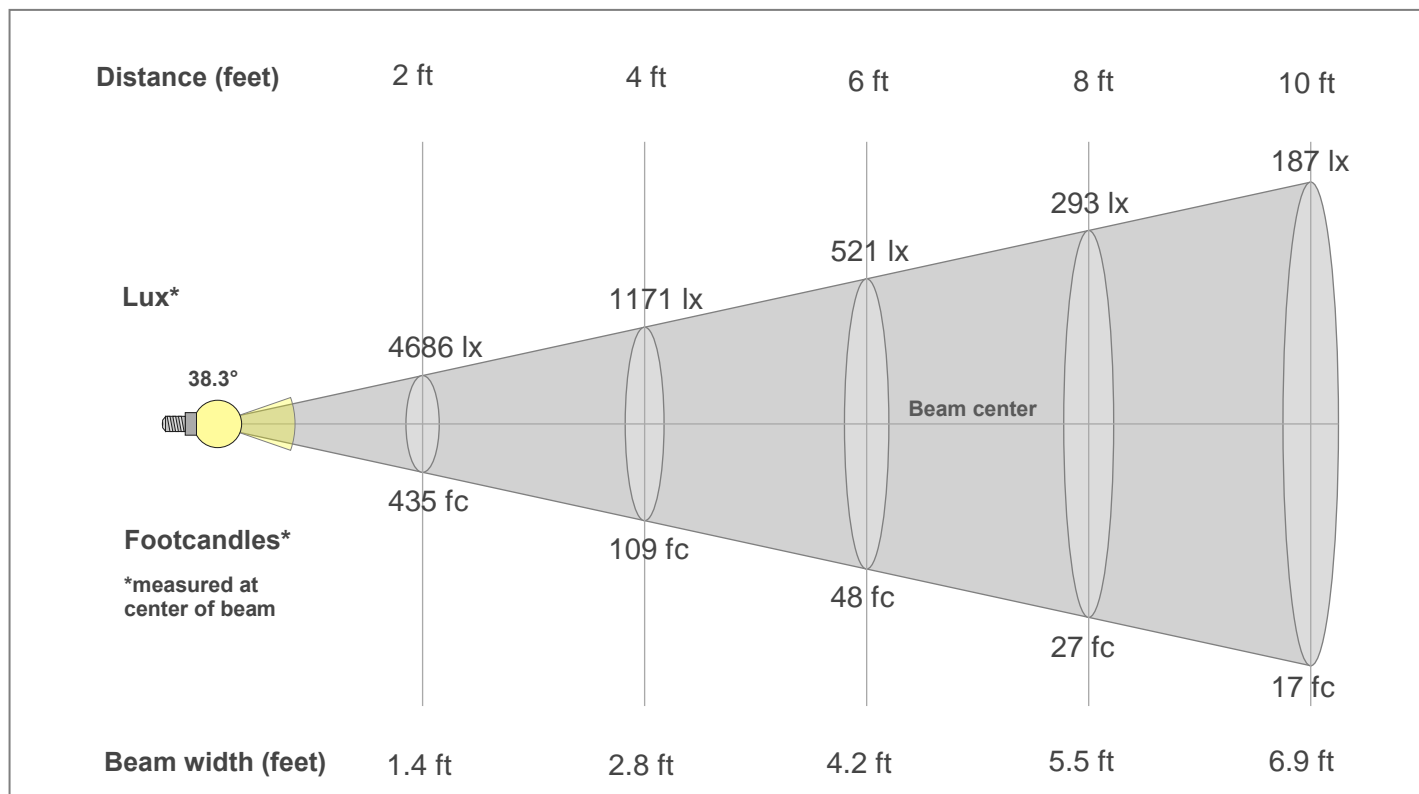

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1741lx	435lx	193lx	109lx	70lx	48lx	36lx	27lx	21lx	17lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	5lx	5lx	4lx
161.8fc	40.4fc	18fc	10.1fc	6.5fc	4.5fc	3.3fc	2.5fc	2fc	1.6fc	1.3fc	1.1fc	1fc	0.8fc	0.7fc	0.6fc	0.6fc	0.5fc	0.4fc	0.4fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1741	1731	1694	1634	1549	1447	1335	1210	1078	945	815	693	582	486	404	335	276	225	183	149
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	33%	28%	23%	19%	16%	13%	11%	9%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1741	1731	1694	1634	1549	1447	1335	1210	1078	945	815	693	582	486	404	335	276	225	183	149
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	33%	28%	23%	19%	16%	13%	11%	9%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1741	1731	1694	1634	1549	1447	1335	1210	1078	945	815	693	582	486	404	335	276	225	183	149
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	33%	28%	23%	19%	16%	13%	11%	9%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1741	1731	1694	1634	1549	1447	1335	1210	1078	945	815	693	582	486	404	335	276	225	183	149
100%	99%	97%	94%	89%	83%	77%	70%	62%	54%	47%	40%	33%	28%	23%	19%	16%	13%	11%	9%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
38.3°	73°	97.9°	99.2%	95.0%