


Tunable White LED

FEATURES

- **Dynamic Light Quality**
Independent Control of Color and Intensity for Ultimate Flexibility
- **4700-2200K Color Range**
Adaptable to the Most Demanding Lighting Applications
- **Driver Options**
DALI, DMX, or 0-10v
- **Optic Options**
15°, 25°, and 40°
- **Available with 800 Series Recessed and MPT3 Series Surface Mount LED**
- **CA JA8 2025 Compliant**

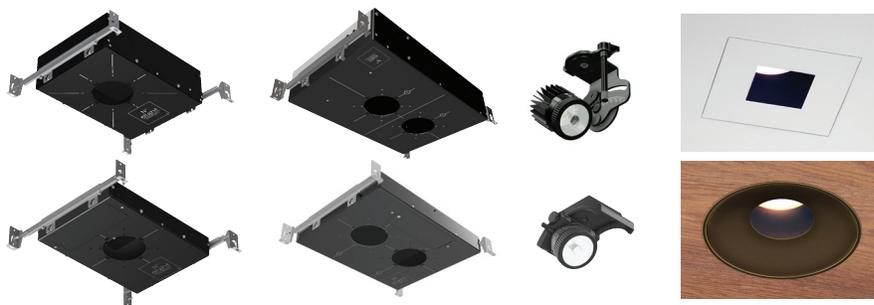

804 SERIES RECESSED LED



MPT3 SERIES SURFACE MOUNT LED

TUNABLE WHITE LED COLOR RANGE at 100% Output



TUNABLE WHITE LED COLOR RANGE at 1% Output



TUNABLE WHITE LED PERFORMANCE SUMMARY

Correlated Color Temperature:	4700K	4500K	4000K	3500K	3000K	2700K	2200K
Wattage:	14.5	14.7	14.6	14.4	14.3	14.3	14.1
Delivered Lumens:	1018	1130	1133	1112	1034	975	817
Delivered Lumens Per Watt:	70	77	78	77	72	68	58

Performance shown for Model 804S Single Lamp with J2S Lamp Module, 15° optic, and FR/FLR/INR-LG/NL trim. Performance varies for each model, beam spread, and trim type.



526 Portal Street
Cotati, CA 94931
USA
P 707.794.0888
www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.
© 2025 No. 8 Lighting

