


# 200 Series – New Construction LED

## FEATURES


- **Recessed New Construction**  
Type Non-IC / Airtight  
Type IC / Airtight / CP Rated
- **Light Engine Options**  
0-30° Adjustable  
Wall Wash
- **LED Options**  
Static White  
Warm Dimming
- **Optic Options**  
15°, 25°, 40°, and 60°
- **Optical Accessories**  
Five Beam Enhancing Lens Options
- **Driver Options**  
Integral: Forward/Reverse Phase,  
0-10V, DALL, EcoSystem
- **Trim Options**  
Flat: 1-7/8" aperture  
Bevel: 2-1/4" aperture  
Wall Wash: 2-3/4" aperture
- **Trim Mounting Options**  
Flanged (for multiple ceiling types)  
Flangeless for Sheetrock  
Flangeless for Wood
- **Three Trim Lens Options**
- **CA JA8 2025 Compliant**
- **Four Finish Options**



## 202/203 NEW CONSTRUCTION LIGHT ENGINES

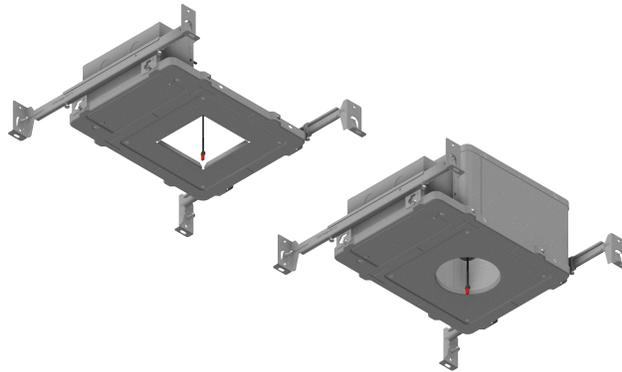

## 200 SERIES NEW CONSTRUCTION HOUSINGS for ROUND or SQUARE LIGHT ENGINES



WHITE



SATIN ALUMINUM



SATIN ALUMINUM w/ WHITE FLANGE



OIL-RUBBED BRONZE

## 200 SERIES PERFORMANCE SUMMARY

LED Options	Static White				Warm Dimming		
	HI-2700	HI-3000	HI-3500	HI-4000	WD	WD-2	WD-4
Delivered Lumens	1094	1151	1197	1232	760	737	769
CRI	92+	92+	92+	92+	97+	95+	95
R9	61	57	61	58	81	74	69
Efficacy	76	80	83	86	50	48	54
CCT Options	2700K	3000K	3500K	4000K	3000K-1800K	2800K-2200K	3000K-2200K

Performance data shown for 202-S-BV with FLS-2-BV Trim.  
Warm Dimming data shown for 3000K and 2800K.



526 Portal Street  
Cotati, CA 94931  
USA  
P 707.794.0888  
www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2025 No. 8 Lighting

