

200-RM Series – Remodel LED

FEATURES


- **Recessed Remodel**
Type Non-IC / Airtight
- **Light Engine Options**
0-30° Adjustable
Wall Wash
- **LED Options**
Static White
Warm Dimming
- **Optic Options**
15°, 25°, 40°, and 60°
- **Optical Accessories**
Five Beam Enhancing Lens Options
- **Driver Options**
INTEGRAL or REMOTE: Forward/
Reverse Phase, 0-10V, DALI,
EcoSystem
- **Trim Options**
Flat: 1-7/8" aperture
Bevel: 2-1/4" aperture
Wall Wash: 2-3/4" aperture
- **Trim Mounting Options**
Flanged (for multiple ceiling types)
Flangeless for Sheetrock
- **Three Trim Lens Options**
- **Four Finish Options**



202-RM/203-RM
REMODEL LIGHT ENGINES
with INTEGRAL POWER SUPPLY



202-RM-RT/203-RM-RT
REMODEL LIGHT ENGINES
for REMOTE POWER SUPPLY

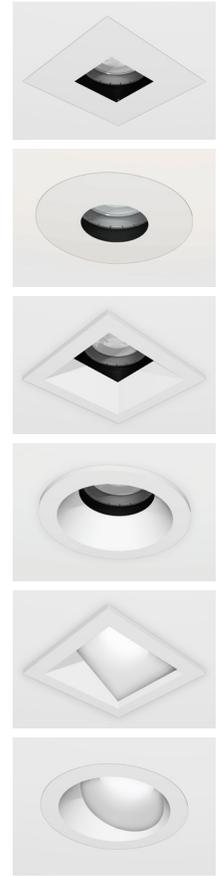

WHITE



SATIN ALUMINUM



SATIN ALUMINUM w/ WHITE FLANGE



OIL-RUBBED BRONZE

200-RM SERIES PERFORMANCE SUMMARY

LED Options	Static White				Warm Dimming		
	HI-2700	HI-3000	HI-3500	HI-4000	WD	WD-2	WD-4
Delivered Lumens	1094	1151	1197	1232	760	737	769
CRI	92+	92+	92+	92+	97+	95+	95
R9	61	57	61	58	81	74	69
Efficacy	76	80	83	86	50	48	54
CCT Options	2700K	3000K	3500K	4000K	3000K-1800K	2800K-2200K	3000K-2200K

Performance data shown for 202-S-BV-RM with FLS-2-BV Trim.
Warm Dimming data shown for 3000K and 2800K.



526 Portal Street
Cotati, CA 94931
USA
P 707.794.0888
www.8lighting.com

All No. 8 Lighting fixtures and components are UL listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2025 No. 8 Lighting

