


MPT3 – LED Monopoint Gen 3

FEATURES

- Multi-Position Adjustment**
 Position 1: 0-110° Adjustable
 Position 2: 0-50° Adjustable
 Position 3: 0° Fixed
- Housing Options**
 Square: 2.5", Round: 2.5"
- Mounting Options** (Wall or Ceiling)
 Surface Mount Canopy: 2.5", 4"
 Flush Mount Canopy: 4" (Compatible with all 800 Series trim models)
- Stem Options**
 6, 12, 18, or 24
- LED Options**
 Static White, Warm Dimming, and Tunable White
- Optic Options**
 10°, 15°, 25°, and 40°
- Optical Accessories**
 Five beam enhancing lens options
 Three color filtering lens options
- Driver Options**
 INTEGRAL or REMOTE: Forward/Reverse Phase, 0-10V, DALI, DMX, EcoSystem
- CA JA8 2025 Compliant**
- Five Finish Options**



MPT3-S/R-SM – SQUARE or ROUND SURFACE MOUNT

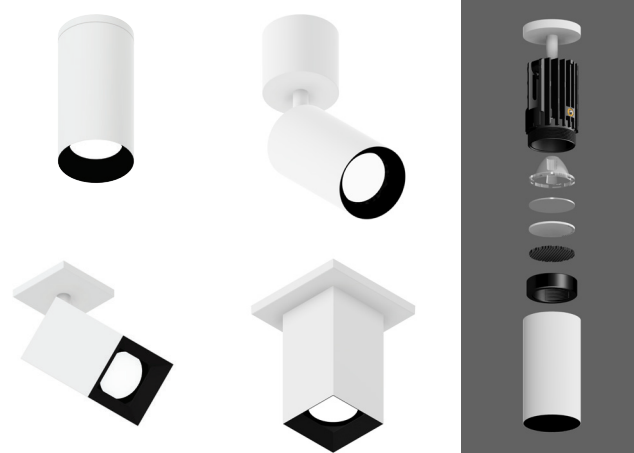

MPT3-S/R-FM – SQUARE or ROUND FLUSH MOUNT



MPT3 PERFORMANCE SUMMARY

LED Options	Static White			Warm Dimming			Tunable White
	HI	HI-2	HI-3	WD	WD-2	WD-4	TW
Delivered Lumens	1220/1489	998	1003	1024	940	1057	1087
CRI	92	94	98	95	96	95	95
R9	55/53	62	97	73	73	69	76
Efficacy	85/75	68	69	70	64	73	72
CCT Options	2700K, 3000K			3000K-1800K	2800K-2200K	3000-2200K	4700-2200K

Static White and Tunable White LED data shown for 3000K.
 Warm Dimming LED data shown for 3000K and 2800K.



526 Portal Street
 Cotati, CA 94931
 USA
 P 707.794.0888
 www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.
 © 2026 No. 8 Lighting

