

HOUSING: **804S** – LOW PROFILE  
 LAMP MODULE: **J2S** – ADJUSTABLE | LED

Project Name	
Date	Type
Prepared By	
Comments	
Catalog # <b>804S/J2S</b> –     –     –     /     –     /	





526 Portal Street  
 Cotati, CA 94931  
 USA  
 P 707.794.0888  
 www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. Select 804S Series fixtures and components are also CE Certified. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2026 No. 8 Lighting  
 Doc # 91170-13.5




PRODUCT FEATURES

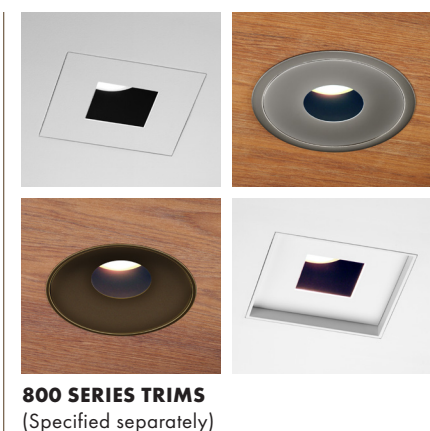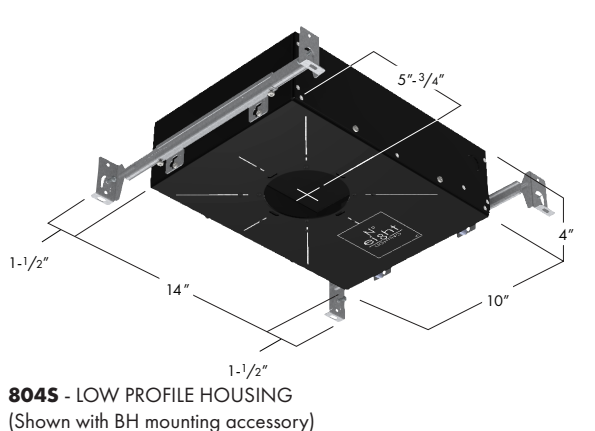

**804S/J2S SPECIFICATION SUMMARY**

	Static White Standard Output			Static White High Output	Warm Dimming			Tunable White
	HI	HI-2	HI-3	HI	WD	WD-2	WD-4	TW
LED Option	HI	HI-2	HI-3	HI	WD	WD-2	WD-4	TW
Delivered Lumens	1041	1044	949	1357	837	834	867	1018
System Wattage	14	14.5	14.7	20	14.5	14.5	14.5	14
Efficacy	74	72	64	68	58	58	58	73
CRI	94	94	97	93	97	97	97	95
R9	60	63	98	58	82	77	77	79
CCT Options	2700K, 3000K				3000-1800K	2800-2200K	3000-2200K	4700-2200K
Optic Options	15, 25, 40	10	10, 15, 25, 40	15, 25, 40	15, 25, 40			15T, 25, 40
Color Consistency	2-Step				3-Step			
Optical Accessories	Narrow, Medium, Wide, Extra Wide, Linear Spread, and 2400K, 2700K, 3500K Color Filters							
Adjustability	0-45° Tilt, 360° Rotation, Lockable							
Driver Options	<1% Forward/Reverse Phase (120v), 0.1/1% 0-10v (120-277v), 0.1/1% DALI (120-277v), 0.1% DMX (120-277v), 0.1/1% EcoSystem (120 or 277v)							
Trim Options	Round/Square Flat, Round/Square Bevel, Round/Square Inset, Round/Square Wall-Wash							
Finish Options	White, Oil-Rubbed Bronze, Pewter, Satin Nickel, Black							
Trim Mounting Options	Flanged, Flangeless Sheetrock, Flangeless Wood							
Trim Accessories	UL Wet Listed and IP54 Rated Lens Options - Clear, Soft Focus, Wall-Wash							
Housing Options	New Construction: Type Non-IC Air-Tight, Type IC-CP Rated CCEA Approved Air-Tight							

Data shown for J2S Lamp Module with FS/FLS/INS-LG/NL trim.  
 Static White data shown for 3000K.  
 Warm Dimming data shown for 3000K and 2800K.  
 Tunable White data shown for 3000K.  
 See Performance Summaries for additional information.  
 800 Series Trims specified separately.

PRODUCT SPECIFIER/PRODUCT ORDER NUMBER

**804S** / **J2S** - - - - - / - - - - - /

HOUSING

LAMP MODULE

LED OPTIONS


OPTIC OPTIONS

OPTICAL ACCESSORIES (Optional)

DRIVER OPTIONS

OUTPUT

MOUNTING ACCESSORIES



**804S**  
New Construction – Low Profile AIRTIGHT-IC and Non-IC Rated  
10"W\* x 14"L\* x 4"H†  
\*Add 3" to length or width to accommodate mounting accessories.  
†Minimum 4 -1/2" ceiling space required when used with INSET and BEVEL Series trim assemblies.

LED ADJUSTABLE



**J2S**  
45° tilt, full 360° rotation with tool-less locking vertical and horizontal adjustment

**HI-27**  
2700K White LED  
**HI**  
3000K White LED  
**HI-2-27\***†  
2700K White LED  
**HI-2\***†  
3000K White LED  
**HI-3-27†**  
2700K White High R9 LED  
**HI-3†**  
3000K White High R9 LED  
**WD†**  
3000-1800K Warm Dim LED  
**WD-2†**  
2800-2200K Warm Dim LED  
**WD-4†**  
3000-2200K Warm Dim LED  
**TW†**  
4700-2200K Tunable White LED  
\*For use with 10° optic only.  
†Available in standard output only.

**10\***  
10° Very Narrow Spot  
**15†**  
15° Narrow Spot  
**15T\*\***  
15° Narrow Spot - Tunable White  
**25††**  
25° Narrow Flood  
**40††**  
40° Flood  
\*For use with HI-2 or HI-3 LED options only.  
†For use with HI, HI-3, WD, WD-2 or WD-4 LED options only.  
\*\*For use with TW LED option only.  
†† Not for use with HI-2 led options.

**NSP**  
Narrow Softening Lens  
**NFL**  
Medium Softening Lens  
**FL**  
Wide Softening Lens  
**WFL**  
Extra Wide Softening Lens  
**LS**  
Linear Spread Softening Lens  
**CF24\***  
2400K Color Filtering Lens  
**CF27\*\***  
2700K Color Filtering Lens  
**CF35\*\***  
3500K Color Filtering Lens  
\*For use with HI, HI-2, and HI-3 2700K LED options only.  
\*\*For use with HI, HI-2, and HI-3 3000K LED options only.

**PR1-8**  
Premium Forward or Reverse-Phase <1% Dimming  
**DMX1-8**  
DMX 0.1% Dimming  
**DMX2-8\***  
2-channel DMX 0.1% Dimming  
**EL1-8†**  
EldoLED 0-10v 1% Dimming  
**EL1-01-8†**  
EldoLED 0-10v 0.1% Dimming  
**EL2-8†**  
EldoLED DALI 1% Dimming  
**EL2-01-8†**  
EldoLED DALI 0.1% Dimming  
**EL3-8\***  
EldoLED 2-channel DALI 0.1% Dimming  
**EL5-8\***  
EldoLED 2-channel 0-10v 0.1% Dimming  
**LU2-8**  
Lutron Hi-Lume LDE1 Eco-System 1% Dimming  
**LU4-8**  
Lutron Hi-Lume PEQOE EcoSystem 0.1% Dimming  
\*Available with TW LED option only.  
†Also CE Certified with HI or HI-2 LED options.

**350**  
Standard output for HI-3, HI-3-27, WD, WD-2, or WD-4 LED Options  
**700†**  
Standard output for TW LED Option  
**1000**  
Standard output for HI, HI-27, HI-2, or HI-2-27 LED Options  
**1400\***  
High output for HI or HI-27 LED Options  
†For use with DMX2-8, EL3-8, or EL5-8 dimming options only.  
\*Non-IC only. Not available w/ DMX1-8, LU2-8, or LU4-8 dimming options.

**BH**  
Bar Hangers for joist mounting  
**BB**  
Butterfly Brackets for c-channel or bar mounting  
**TBC-BH**  
T-Bar Mounting Clips + Bar Hangers for T-Bar mounting  
**PMB**  
Panel Mounting Brackets (set of two) for direct mounting to wood panels

**Housing and Installation Notes**

**804S** Low Profile universal IC and Non-IC Rated housing available with two output options. Meets Washington State Airtight Standard WAC 51-11-0502 and in accordance with ASTM E283 to reduce energy loss. CCEA plenum rated for City of Chicago environmental air spaces. Standard output options are IC-Rated for direct contact with standard or spray-foam thermal insulation with a max combined R-Value of R42. High output options are Non-IC rated for use where insulation can be kept a minimum of 3" away from all sides. For standard output models, ambient temperatures in ceiling space should not exceed 40°C (104°F) during normal operation. For high output models and all models with **LU2-8** dimming option, ambient temperatures should not exceed 25°C (77°F). Accepts **J2S**, **K2S**, and **M2S** LED Lamp Modules and all **800 Series** Trim Assemblies. For **800 Series** Trims (specified separately), see [8lighting.com/products-800-series-led](http://8lighting.com/products-800-series-led).

**Lamp Module, LED, Optic Option, and Accessory Notes**

**J2S** Fully adjustable lamp module features patented tool-free adjustment mechanism. Use for adjustable accent, wall wash\*, and general lighting applications. \*For wall washing: specify 40° optic option with **HI**, **HI-3**, **WD**, **WD-2**, **WD-4**, or **TW** LED or 10° optic option and **FL** lens with **HI-2** LED. Requires **WW-8** wall wash accessory, specified with **FS/FR** or **FLS/FLR** (1.75" aperture) **800 Series** trims. To ensure fixture to fixture color consistency, use of the same LED option with adjacent fixtures is recommended. One field interchangeable optic option included standard. Up to two additional optical accessories can be accommodated.

**Driver and Output Option Notes**

0-10v and DMX driver options are configured for linear control. DALI driver options are configured for logarithmic control. No.8 Lighting conducts extensive testing to establish compatibility with many dimmer types. For a complete list of compatible dimmers, see [8lighting.com/resources-downloads](http://8lighting.com/resources-downloads). Outputs vary depending on LED type, trim type, and optical accessories used. For photometric files in PDF and IES formats, see [8lighting.com/800-series-photometry](http://8lighting.com/800-series-photometry).

**Warranty**

All No. 8 lighting products are covered by a 5 year limited warranty. Products installed in residential steam applications are covered by a 2 year limited warranty. For specific warranty details and limitations, see [8lighting.com/resources-downloads](http://8lighting.com/resources-downloads).

**JA8-2025 CA Title 24 Compliant**

### 804S/J2S w/ FS/FLS/INS 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	59	737-883	14	53-63
HI	1000	3000K	94	60	792-949	14	57-68
HI-27	1400	2700K	94	57	962-1141	20	48-57
HI	1400	3000K	93	58	1034-1227	20	52-61
HI-2-27	1000	2700K	94	62	955	14.5	66
HI-2	1000	3000K	94	63	1027	14.5	71
HI-3-27	350	2700K	97	96-98	666-811	14.7	45-55
HI-3	350	3000K	97	96-98	716-872	14.7	49-59
WD	350	3000-1800K	97	82	602-735	14.5	42-51
WD-2	350	2800-2200K	96	78	598-731	14.5	41-50
WD-4	350	3000-2200K	97	76	648-767	14.5	45-53
TW	700	4700-2200K	95	79	672-943	14	48-67

Performance summary for HI LED with 15°, 25°, and 40° optic options, HI-2 LED with 10° optic option, and HI-3 LED with 10°, 15°, 25°, and 40° optic options.  
 Performance summary for WD and WD-4 LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.  
 Performance summary for TW LED at 3000K with 15°, 25°, and 40° optic options.

### 804S/J2S w/ FR/FLR/INR 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	59	714-875	14	51-63
HI	1000	3000K	94	60	768-941	14	55-67
HI-27	1400	2700K	94	57	933-1156	20	47-58
HI	1400	3000K	93	58	1003-1243	20	50-62
HI-2-27	1000	2700K	94	62	946	14.5	65
HI-2	1000	3000K	94	63	1017	14.5	70
HI-3-27	350	2700K	97	96-98	646-804	14.7	44-55
HI-3	350	3000K	97	96-98	695-865	14.7	48-59
WD	350	3000-1800K	97	81	600-739	14.5	41-51
WD-2	350	2800-2200K	97	77	595-739	14.5	41-51
WD-4	350	3000-2200K	97	76	628-750	14.5	43-52
TW	700	4700-2200K	95	79	645-918	14	46-66

Performance summary for HI LED with 15°, 25°, and 40° optic options, HI-2 LED with 10° optic option, and HI-3 LED with 10°, 15°, 25°, and 40° optic options.  
 Performance summary for WD and WD-4 LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.  
 Performance summary for TW LED at 3000K with 15°, 25°, and 40° optic options.

### 804S/J2S w/ 1.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	25°	44°	47°	13° x 39°
10° Very Narrow Spot	HI-3	14°	23°	40°	46°	14° x 41°
15° Narrow Spot	HI	21°	30°	45°	51°	21° x 40°
15° Narrow Spot	HI-3	17°	26°	42°	50°	17° x 43°
15° Narrow Spot	WD/WD-2/WD-4	24°	31°	36°	50°	25° x 41°
15° Narrow Spot	TW	21°	27°	37°	38°	25° x 30°
25° Narrow Flood	HI	28°	34°	47°	52°	30° x 39°
25° Narrow Flood	HI-3	24°	30°	47°	52°	24° x 49°
25° Narrow Flood	WD/WD-2/WD-4	29°	34°	46°	52°	32° x 38°
25° Narrow Flood	TW	28°	37°	46°	50°	29° x 43°
40° Flood	HI	41°	43°	43°	59°	40° x 52°
40° Flood	HI-3	33°	37°	49°	54°	32° x 51°
40° Flood	WD/WD-2/WD-4	37°	40°	49°	54°	37° x 47°
40° Flood	TW	37°	40°	49°	54°	36° x 48°

\*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

# 804S/J2S w/ FS/FLS/INS 1.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

STANDARD OUTPUT	<p><b>10° - Very Narrow Spot</b></p> <p><b>804S/J2S-HI-2-10/1000</b></p> <p>2 ft - 3,938 fc      Ø0.4 ft 4 ft - 985 fc      Ø0.8 ft 6 ft - 438 fc      Ø1.2 ft 8 ft - 246 fc      Ø1.5 ft 10 ft - 158 fc      Ø1.9 ft</p> <p>CBCP: 15,774 cd</p>	<p><b>15° - Narrow Spot</b></p> <p><b>804S/J2S-HI-15/1000</b></p> <p>2ft - 1,426 fc      Ø0.07 ft 4ft - 356 fc      Ø1.3 ft 6ft - 158 fc      Ø2.0 ft 8ft - 89 fc      Ø2.6 ft 10ft - 57 fc      Ø3.3 ft</p> <p>CBCP: 5,723 cd</p>	<p><b>25° - Narrow Flood</b></p> <p><b>804S/J2S-HI-25/1000</b></p> <p>2ft - 736 fc      Ø1.0 ft 4ft - 184 fc      Ø1.9 ft 6ft - 82 fc      Ø2.9 ft 8ft - 46 fc      Ø3.9 ft 10ft - 29 fc      Ø4.8 ft</p> <p>CBCP: 2,952 cd</p>	<p><b>40° - Flood</b></p> <p><b>804S/J2S-HI-40/1000</b></p> <p>2ft - 435 fc      Ø1.5 ft 4ft - 109 fc      Ø3.0 ft 6ft - 48 fc      Ø4.4 ft 8ft - 27 fc      Ø5.9 ft 10ft - 17 fc      Ø7.4 ft</p> <p>CBCP: 1,739 cd</p>	
		<p><b>15° - Narrow Spot</b></p> <p><b>804S/J2S-HI-15/1400</b></p> <p>2ft - 1,854 fc      Ø0.7 ft 4ft - 464 fc      Ø1.3 ft 6ft - 206 fc      Ø2.0 ft 8ft - 116 fc      Ø2.6 ft 10ft - 74 fc      Ø3.3 ft</p> <p>CBCP: 7,456 cd</p>	<p><b>25° - Narrow Flood</b></p> <p><b>804S/J2S-HI-25/1400</b></p> <p>2ft - 736 fc      Ø1.0 ft 4ft - 184 fc      Ø1.9 ft 6ft - 82 fc      Ø2.9 ft 8ft - 46 fc      Ø3.9 ft 10ft - 29 fc      Ø4.8 ft</p> <p>CBCP: 2,952 cd</p>	<p><b>40° - Flood</b></p> <p><b>804S/J2S-HI-40/1400</b></p> <p>2ft - 568 fc      Ø1.5 ft 4ft - 142 fc      Ø3.0 ft 6ft - 63 fc      Ø4.4 ft 8ft - 35 fc      Ø5.9 ft 10ft - 23 fc      Ø7.4 ft</p> <p>CBCP: 2,275 cd</p>	
	HIGH OUTPUT		<p><b>15° - Narrow Spot</b></p> <p><b>804S/J2S-HI-3-15/350</b></p> <p>2ft - 1,922 fc      Ø0.07 ft 4ft - 481 fc      Ø1.1 ft 6ft - 214 fc      Ø1.6 ft 8ft - 120 fc      Ø2.2 ft 10ft - 77 fc      Ø3.7 ft</p> <p>CBCP: 7,747 cd</p>	<p><b>25° - Narrow Flood</b></p> <p><b>804S/J2S-HI-3-25/350</b></p> <p>2ft - 917 fc      Ø0.8 ft 4ft - 229 fc      Ø1.6 ft 6ft - 102 fc      Ø2.4 ft 8ft - 57 fc      Ø3.3 ft 10ft - 37 fc      Ø4.1 ft</p> <p>CBCP: 3,675 cd</p>	<p><b>40° - Flood</b></p> <p><b>804S/J2S-HI-3-40/350</b></p> <p>2ft - 545 fc      Ø1.2 ft 4ft - 136 fc      Ø2.4 ft 6ft - 61 fc      Ø3.5 ft 8ft - 34 fc      Ø4.7 ft 10ft - 22 fc      Ø5.9 ft</p> <p>CBCP: 2,183 cd</p>
		STANDARD OUTPUT - HI-3	<p><b>10° - Very Narrow Spot</b></p> <p><b>804S/J2S-HI-3-10/350</b></p> <p>2 ft - 3,109 fc      Ø0.4 ft 4 ft - 777 fc      Ø0.9 ft 6 ft - 345 fc      Ø1.3 ft 8 ft - 194 fc      Ø1.7 ft 10 ft - 124 fc      Ø2.2 ft</p> <p>CBCP: 12,463 cd</p>		
STANDARD OUTPUT - WARM DIM		<p><b>15° - Narrow Spot</b></p> <p><b>804S/J2S-WD-15/350</b></p> <p>2ft - 871 fc      Ø0.8 ft 4ft - 218 fc      Ø1.6 ft 6ft - 97 fc      Ø2.4 ft 8ft - 54 fc      Ø3.3 ft 10ft - 35 fc      Ø4.1 ft</p> <p>CBCP: 3,498 cd</p>	<p><b>25° - Narrow Flood</b></p> <p><b>804S/J2S-WD-25/350</b></p> <p>2ft - 533 fc      Ø1.0 ft 4ft - 133 fc      Ø2.0 ft 6ft - 59 fc      Ø3.1 ft 8ft - 33 fc      Ø4.1 ft 10ft - 21 fc      Ø5.1 ft</p> <p>CBCP: 2,136 cd</p>	<p><b>40° - Flood</b></p> <p><b>804S/J2S-WD-40/350</b></p> <p>2ft - 401 fc      Ø1.3 ft 4ft - 100 fc      Ø2.6 ft 6ft - 45 fc      Ø4.0 ft 8ft - 25 fc      Ø5.3 ft 10ft - 16 fc      Ø6.6 ft</p> <p>CBCP: 1,605 cd</p>	
	STANDARD OUTPUT - TUNABLE WHITE	<p><b>15° - Narrow Spot</b></p> <p><b>804S/J2S-TW-15T/700</b></p> <p>2ft - 1,730 fc      Ø0.8 ft 4ft - 432 fc      Ø1.5 ft 6ft - 192 fc      Ø2.3 ft 8ft - 108 fc      Ø3.1 ft 10ft - 69 fc      Ø3.9 ft</p> <p>CBCP: 6,919 cd</p>	<p><b>25° - Narrow Flood</b></p> <p><b>804S/J2S-TW-25/700</b></p> <p>2ft - 606 fc      Ø1.0 ft 4ft - 152 fc      Ø2.0 ft 6ft - 67 fc      Ø3.0 ft 8ft - 38 fc      Ø4.0 ft 10ft - 24 fc      Ø5.0 ft</p> <p>CBCP: 2,424 cd</p>	<p><b>40° - Flood</b></p> <p><b>804S/J2S-TW-40/700</b></p> <p>2ft - 430 fc      Ø1.3 ft 4ft - 108 fc      Ø2.7 ft 6ft - 48 fc      Ø4.0 ft 8ft - 27 fc      Ø5.4 ft 10ft - 17 fc      Ø6.7 ft</p> <p>CBCP: 1,722 cd</p>	

Performance shown for 3000K. Output varies by CCT.

**804S/J2S w/ FS/FLS/INS-LG/NL 2.75" APERTURE TRIM - PERFORMANCE SUMMARY**

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	59	838-968	14	60-69
HI	1000	3000K	94	60	901-1041	14	64-74
HI-27	1400	2700K	94	57	1098-1262	20	55-63
HI	1400	3000K	93	58	1181-1357	20	59-68
HI-2-27	1000	2700K	94	62	971	14.5	67
HI-2	1000	3000K	94	63	1044	14.5	72
HI-3-27	350	2700K	97	96-98	760-883	14.7	52-60
HI-3	350	3000K	97	96-98	817-949	14.7	56-64
WD	350	3000-1800K	97	82	727-837	14.5	50-58
WD-2	350	2800-2200K	96	77	728-834	14.5	40-58
WD-4	350	3000-2200K	97	76	769-867	14.5	53-60
TW	700	4700-2200K	95	79	803-1018	14	57-73

Performance summary for HI LED with 15°, 25°, and 40° optic options, HI-2 LED with 10° optic option, and HI-3 LED with 10°, 15°, 25°, and 40° optic options.  
 Performance summary for WD and WD-4 LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.  
 Performance summary for TW LED at 3000K with 15°, 25°, and 40° optic options.

**804S/J2S w/ FR/FLR/INR-LG/NL 2.75" APERTURE TRIM - PERFORMANCE SUMMARY**

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	59	846-976	14	60-70
HI	1000	3000K	94	60	910-1049	14	65-75
HI-27	1400	2700K	94	57	1097-1256	20	55-63
HI	1400	3000K	93	58	1180-1350	20	59-68
HI-2-27	1000	2700K	94	62	976	14.5	67
HI-2	1000	3000K	94	63	1049	14.5	72
HI-3-27	350	2700K	97	96-98	766-856	14.7	52-58
HI-3	350	3000K	97	96-98	824-920	14.7	56-62
WD	350	3000-1800K	97	81	745-862	14.5	51-59
WD-2	350	2800-2200K	97	77	741-849	14.5	51-59
WD-4	350	3000-2200K	97	76	772-868	14.5	53-60
TW	700	4700-2200K	95	79	794-1034	14	57-74


Performance summary for HI LED with 15°, 25°, and 40° optic options and HI-2 LED with 10° optic option, and HI-3 LED with 10°, 15°, 25°, and 40° optic options.  
 Performance summary for WD and WD-4 LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.  
 Performance summary for TW LED at 3000K with 15°, 25°, and 40° optic options.

**804S/J2S w/ 2.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY**

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	24°	43°	47°	13° x 39°
10° Very Narrow Spot	HI-3	14°	24°	48°	58°	14° x 51°
15° Narrow Spot	HI	21°	31°	54°	67°	22° x 48°
15° Narrow Spot	HI-3	17°	27°	51°	62°	17° x 51°
15° Narrow Spot	WD/WD-2/WD-4	24°	33°	54°	66°	26° x 48°
15° Narrow Spot	TW	23°	30°	48°	54°	27° x 34°
25° Narrow Flood	HI	29°	37°	57°	71°	30° x 55°
25° Narrow Flood	HI-3	24°	32°	55°	65°	25° x 60°
25° Narrow Flood	WD/WD-2/WD-4	31°	38°	58°	70°	70° x 71°
25° Narrow Flood	TW	30°	37°	57°	69°	31° x 53°
40° Flood	HI	42°	45°	46°	80°	41° x 63°
40° Flood	HI-3	34°	35°	62°	71°	34° x 65°
40° Flood	WD/WD-2/WD-4	39°	44°	64°	77°	76° x 77°
40° Flood	TW	38°	43°	63°	76°	37° x 61°

\*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

# 804S/J2S w/ FS/FLS/INS-LG/NL 2.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

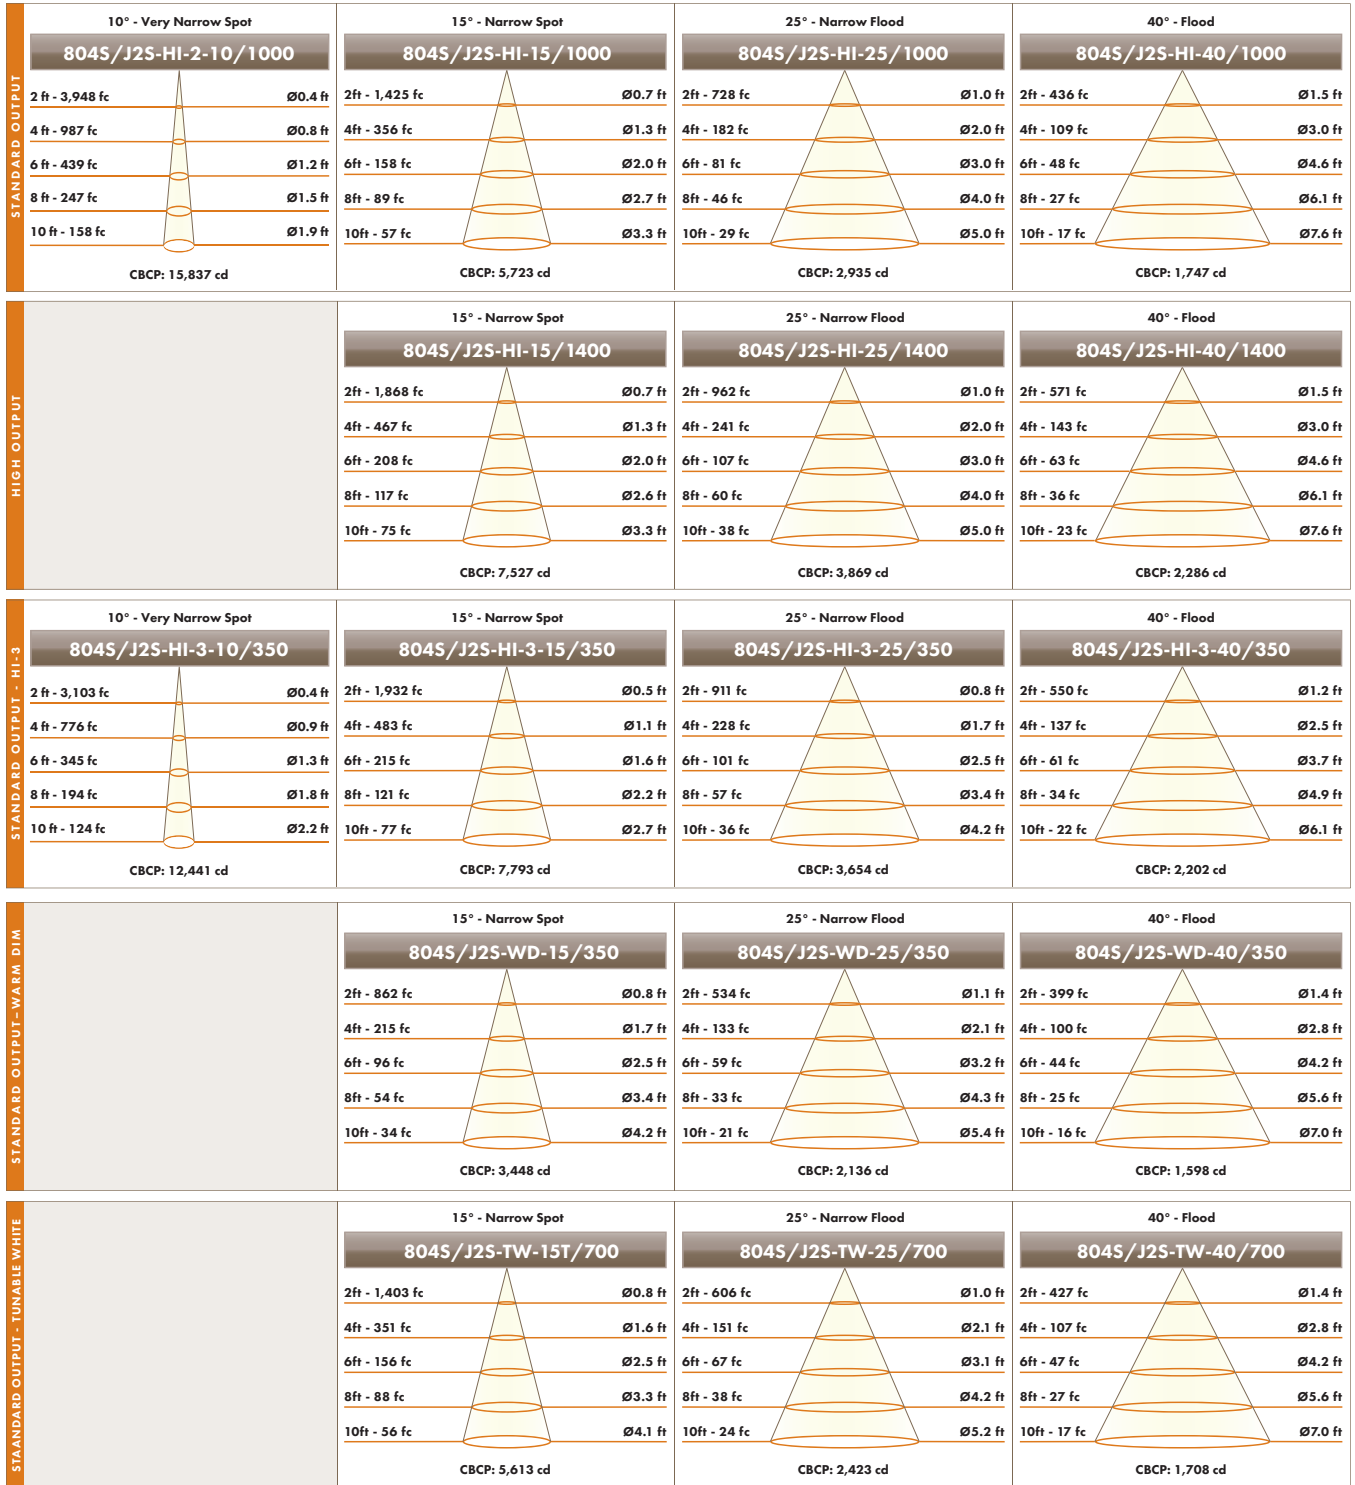

Performance shown for 3000K. Output varies by CCT.