

HOUSING: **804D-S** – LOW PROFILE DEEP CEILING / SQUARE
 LAMP MODULES: **J2S/K2S/M2S** | LED
 TRIM: **FS-P/FS-LG-P** SEAMLESS SERIES / SQUARE



526 Portal Street
 Cotati, CA 94931
 USA
 P 707.794.0888
 www.8lighting.com


All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. Select 804S Series fixtures and components are also CE Certified. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2026 No. 8 Lighting
 Doc # 91178-13.4




Project Name	
Date	Type
Prepared By	
Comments	
Catalog # 804D-S / - - - / - /	
- - -	


PRODUCT FEATURES

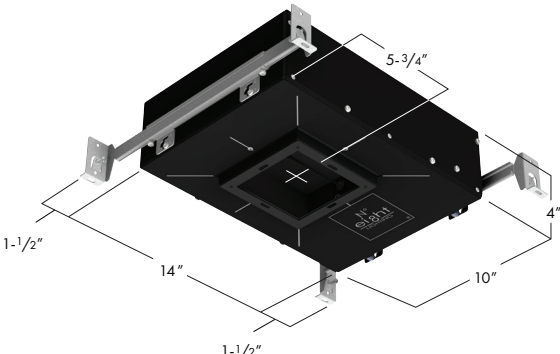


804D-S - LOW PROFILE DEEP CEILING HOUSING - SQUARE
 (Shown with BH mounting accessory)



J2S - LED ADJUSTABLE




K2S - LED FIXED POSITION




M2S-5 - LED MIRROR REFLECTOR - SQUARE


J2S/K2S/M2S - LAMP MODULES




FS-P



FS-P w/ WW-8



FS-LG-P



FS-P w/ M2S-5

FS-P/FS-LG-P SEAMLESS SERIES TRIMS





804D-S - SPECIFICATION SUMMARY

	Static White Standard Output				Static White High Output		Warm Dimming		Tunable White
	HI-2-27	HI-2	HI-27	HI	HI-27	HI	WD	WD-2	TW
LED Option	HI-2-27	HI-2	HI-27	HI	HI-27	HI	WD	WD-2	TW
Delivered Lumens	971-1050	1044-1129	968-1042	1041-1120	1262-1369	1357-1472	837-923	834-915	1018
System Wattage	14.5	14.5	14	14	20	20	14.5	14.5	14
Efficacy	67-72	72-78	69-74	74-80	63-68	68-74	58-64	58-63	73
CRI	94	94	94	94	94	93	97	97	95
R9	62	63	59	60	57	58	81	77	79
CCT	2700K	3000K	2700K	3000K	2700K	3000K	3000-1800K	2800-2200K	4700-2200K
Optic Options	10		15, 25, 40				15, 25, 40		15T, 25, 40
Color Consistency	2-Step					3-Step			
Optical Accessories	Narrow, Medium, Wide, Extra Wide, Linear Spread, and 2400K, 2700K, 3500K Color Filters								
Adjustability	J2S: 0-45° Tilt, 360° Rotation, Lockable / K2S: Fixed / M2S: 35-90° Tilt, 90° Rotation, Lockable								
Driver Options	<1% Forward/Reverse Phase (120v), 0.1/1% 0-10v (120-277v), 0.1/1% DALI (120-277v), 0.1% DMX (120-277v), 0.1/1% EcoSystem (120 or 277v)								
Trim Options	Square Flat, Square Wall-Wash								
Finish Options	White, Oil-Rubbed Bronze, Polished Nickel, Satin Nickel, Black								
Trim Mounting Options	Flangeless Sheetrock								
Trim Accessories	UL Wet Listed and IP54 Rated Lens Options - Clear, Soft Focus, Wall-Wash								
Housing Options	New Construction: Type Non-IC Air-Tight, Type IC-CP Rated CCEA Approved Air-Tight								



Performance data shown for J2S and K2S Lamp Modules with FS-P-1-LG/NL trim.
 Warm Dimming data shown for 3000K and 2800K.
 Tunable White data shown for 3000K.
 See Performance Summaries for additional information.

PRODUCT SPECIFIER/PRODUCT ORDER NUMBER

804D-S /

HOUSING	LAMP MODULE	LED OPTIONS	OPTIC OPTIONS	OPTICAL ACCESSORIES (Optional)	DRIVER OPTIONS	OUTPUT	MOUNTING ACCESSORIES
 <p>804D-S New Construction – Low Profile AIRTIGHT-IC and Non-IC Rated for Deep Ceiling Applications with SQUARE Trims 10"W* x 14"L* x 4"H *Add 3" to length or width to accommodate mounting accessories assemblies.</p>	 <p>J2S LED ADJUSTABLE 45° tilt, full 360° rotation with tool-less locking</p>  <p>K2S LED FIXED POSITION</p>  <p>M2S-S* LED MIRROR REFLECTOR 4" SQUARE module w/ integral trim plate *For use with FS trim only.</p>	<p>HI-27 2700K White LED</p> <p>HI 3000K White LED</p> <p>HI-2-27* 2700K White LED</p> <p>HI-2* 3000K White LED</p> <p>WD† 3000-1800K Warm Dim LED</p> <p>WD-2† 2800-2200K Warm Dim LED</p> <p>TW†† 4700-2200K Tunable White LED</p> <p>*For use with 10° optic only. Available in standard output only.</p> <p>†Available in standard output only.</p> <p>††Available in standard output only. Available with J2S LED lamp module only.</p>	<p>10* 10° Very Narrow Spot</p> <p>15† 15° Narrow Spot</p> <p>15T** 15° Narrow Spot - Tunable White</p> <p>25†† 25° Narrow Flood</p> <p>40†† 40° Flood</p> <p>*For use with HI-2 LED option only</p> <p>†For use with HI, WD, or WD-2 LED options only</p> <p>**For use with TW LED option only.</p> <p>††For use with HI, WD, 2, or TW LED options only.</p>	<p>NSP Narrow Softening Lens</p> <p>NFL Medium Softening Lens</p> <p>FL Wide Softening Lens</p> <p>WFL Extra Wide Softening Lens</p> <p>LS Linear Spread Softening Lens</p> <p>CF24* 2400K Color Filtering Lens</p> <p>CF27** 2700K Color Filtering Lens</p> <p>CF35** 3500K Color Filtering Lens</p> <p>*For use with HI and HI-2 2700K LED options only.</p> <p>**For use with HI and HI-2 3000K LED options only.</p>	<p>PR1-8 Premium Forward or Reverse-Phase <1% Dimming</p> <p>DMX1-8 DMX 0.1% Dimming</p> <p>DMX2-8* 2-channel DMX 0.1% Dimming</p> <p>EL1-8 EldoLED 0-10v 1% Dimming</p> <p>EL1-01-8 EldoLED 0-10v 0.1% Dimming</p> <p>EL2-8 EldoLED DALI 1% Dimming</p> <p>EL2-01-8 EldoLED DALI 0.1% Dimming</p> <p>EL3-8* EldoLED 2-channel DALI 0.1% Dimming</p> <p>EL5-8* EldoLED 2-channel 0-10v 0.1% Dimming</p> <p>LU2-8 Lutron Hi-Lume LDE1 Eco-System 1% Dimming</p> <p>LU4-8 Lutron Hi-Lume PEQOE EcoSystem 0.1% Dimming</p> <p>*Available with TW LED option only</p>	<p>350 Standard output for WD or WD-4 LED Options</p> <p>700† Standard output for TW LED Option</p> <p>1000 Standard output for HI, HI-27, HI-2, or HI-2-27 LED Options</p> <p>1400* High output for HI or HI-27 LED Options</p> <p>†For use with DMX2-8, EL3-8, or EL5-8 dimming options only.</p> <p>*Non-IC only. Not available w/ DMX1-8, LU2-8, or LU4-8 dimming options.</p>	<p>BH Bar Hangers for joist mounting</p> <p>BB Butterfly Brackets for c-channel or bar mounting</p> <p>TBC-BH T-Bar Mounting Clips + Bar Hangers for T-Bar mounting</p> <p>PMB Panel Mounting Brackets (set of two) for direct mounting to wood panels</p>

TRIM PRODUCT SPECIFIER/PRODUCT ORDER NUMBER

TRIM	TRIM APPLICATION	TRIM FINISH	TRIM ACCESSORY (for J2S or K2S lamp modules only)
 <p>FS* SQUARE flangeless trim 4" SQUARE trim plate w/ 1-3/4" aperture installs flush with finished ceiling *No trim plate included when specified with M2S LED lamp module</p>  <p>FS-LG† SQUARE flangeless trim 4" SQUARE trim plate w/ 2-3/4" aperture installs flush with finished ceiling †Includes solite soft focus lens installed standard</p>	<p>P-1 Flush Plaster/Sheetrock ceiling applications with 5/32" thick drywall compound or plaster finish</p> <p>P-2 Flush Plaster/Sheetrock ceiling applications with 5/16" thick drywall compound or plaster finish</p>	<p>WH WHITE</p> <p>PW PEWTER††</p> <p>SN SATIN NICKEL††</p> <p>OB OIL-RUBBED BRONZE*</p> <p>BK BLACK††</p> <p>*Specialty finish. ††Specialty finish. Not available with M2S lamp module.</p>	<p>CL* CLEAR LENS installed in trim plate</p> <p>SF* SOFT FOCUS LENS installed in trim plate</p> <p>NL NO LENS installed in trim plate</p> <p>WW-8* WALL WASH accessory (for use with J2S LED lamp module only) *UL WET LISTED and IP54 Rated for use in DRY, DAMP, or WET locations (covered ceiling applications only). Approved for use in residential steam applications. Not for use in commercial steam applications.</p>

804D-S/J2S w/ FS-P 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	59	737-883	14	53-63
HI	1000	3000K	94	60	792-949	14	57-68
HI-27	1400	2700K	94	57	962-1141	20	48-57
HI	1400	3000K	93	58	1034-1227	20	52-61
HI-2-27	1000	2700K	94	62	955	14.5	66
HI-2	1000	3000K	94	63	1027	14.5	71
WD	350	3000-1800K	97	82	602-735	14.5	42-51
WD-2	350	2800-2200K	96	78	598-731	14.5	41-50
TW	700	4700-2200K	95	79	672-943	14	48-67

Performance summary for **HI** LED with 15°, 25°, and 40° optic options and **HI-2** LED with 10° optic option.

Performance summary for **WD** LED at 3000K and **WD-2** LED at 2800K with 15°, 25°, and 40° optic options.

Performance summary for **TW** LED at 3000K with 15°, 25°, and 40° optic options.

804D-S/J2S w/ 1.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	25°	44°	47°	13° x 39°
15° Narrow Spot	HI	21°	30°	45°	51°	21° x 40°
15° Narrow Spot	WD/WD-2	24°	31°	36°	50°	25° x 41°
15° Narrow Spot	TW	21°	27°	37°	38°	25° x 30°
25° Narrow Flood	HI	28°	34°	47°	52°	30° x 39°
25° Narrow Flood	WD/WD-2	29°	34°	46°	52°	32° x 38°
25° Narrow Flood	TW	28°	37°	46°	50°	29° x 43°
40° Flood	HI	41°	43°	43°	59°	40° x 52°
40° Flood	WD/WD-2	37°	40°	49°	54°	37° x 47°
40° Flood	TW	37°	40°	49°	54°	36° x 48°

*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

804D-S/J2S w/ FS-P 1.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

	10° - Very Narrow Spot	15° - Narrow Spot	25° - Narrow Flood	40° - Flood		
STANDARD OUTPUT	804D-S/J2S-HI-2-10/1000 2ft - 3,938 fc Ø0.4 ft 4ft - 985 fc Ø0.8 ft 6ft - 438 fc Ø1.2 ft 8ft - 246 fc Ø1.5 ft 10ft - 158 fc Ø1.9 ft CBCP: 15,774 cd	804D-S/J2S-HI-15/1000 2ft - 1,426 fc Ø0.7 ft 4ft - 356 fc Ø1.3 ft 6ft - 158 fc Ø2.0 ft 8ft - 89 fc Ø2.6 ft 10ft - 57 fc Ø3.3 ft CBCP: 5,723 cd	804D-S/J2S-HI-25/1000 2ft - 736 fc Ø1.0 ft 4ft - 184 fc Ø1.9 ft 6ft - 82 fc Ø2.9 ft 8ft - 46 fc Ø3.9 ft 10ft - 29 fc Ø4.8 ft CBCP: 2,952 cd	804D-S/J2S-HI-40/1000 2ft - 435 fc Ø1.5 ft 4ft - 109 fc Ø3.0 ft 6ft - 48 fc Ø4.4 ft 8ft - 27 fc Ø5.9 ft 10ft - 17 fc Ø7.4 ft CBCP: 1,739 cd		
	HIGH OUTPUT	804D-S/J2S-HI-15/1400 2ft - 1,854 fc Ø0.7 ft 4ft - 464 fc Ø1.3 ft 6ft - 206 fc Ø2.0 ft 8ft - 116 fc Ø2.6 ft 10ft - 74 fc Ø3.3 ft CBCP: 7,456 cd	804D-S/J2S-HI-25/1400 2ft - 965 fc Ø1.0 ft 4ft - 241 fc Ø1.9 ft 6ft - 107 fc Ø2.9 ft 8ft - 60 fc Ø3.9 ft 10ft - 39 fc Ø4.8 ft CBCP: 3,881 cd	804D-S/J2S-HI-40/1400 2ft - 568 fc Ø1.5 ft 4ft - 142 fc Ø3.0 ft 6ft - 63 fc Ø4.4 ft 8ft - 35 fc Ø5.9 ft 10ft - 23 fc Ø7.4 ft CBCP: 2,275 cd		
		STANDARD OUTPUT - WARM DIM	804D-S/J2S-WD-15/350 2ft - 871 fc Ø0.8 ft 4ft - 218 fc Ø1.6 ft 6ft - 97 fc Ø2.4 ft 8ft - 54 fc Ø3.3 ft 10ft - 35 fc Ø4.1 ft CBCP: 3,498 cd	804D-S/J2S-WD-25/350 2ft - 533 fc Ø1.0 ft 4ft - 133 fc Ø2.0 ft 6ft - 59 fc Ø3.1 ft 8ft - 33 fc Ø4.1 ft 10ft - 21 fc Ø5.1 ft CBCP: 2,136 cd	804D-S/J2S-WD-40/350 2ft - 401 fc Ø1.3 ft 4ft - 100 fc Ø2.6 ft 6ft - 45 fc Ø4.0 ft 8ft - 25 fc Ø5.3 ft 10ft - 16 fc Ø6.6 ft CBCP: 1,605 cd	
			STANDARD OUTPUT - TUNABLE WHITE	804D-S/J2S-TW-15/700 2ft - 1,730 fc Ø0.8 ft 4ft - 432 fc Ø1.5 ft 6ft - 192 fc Ø2.3 ft 8ft - 108 fc Ø3.1 ft 10ft - 69 fc Ø3.9 ft CBCP: 6,919 cd	804D-S/J2S-TW-25/700 2ft - 606 fc Ø1.0 ft 4ft - 152 fc Ø2.0 ft 6ft - 67 fc Ø3.0 ft 8ft - 38 fc Ø4.0 ft 10ft - 24 fc Ø5.0 ft CBCP: 2,424 cd	804D-S/J2S-TW-40/700 2ft - 430 fc Ø1.3 ft 4ft - 108 fc Ø2.7 ft 6ft - 48 fc Ø4.0 ft 8ft - 27 fc Ø5.4 ft 10ft - 17 fc Ø6.7 ft CBCP: 1,722 cd

Performance shown for 3000K. Output varies by CCT.

804D-S/J2S w/ FS-LG-P/NL 2.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	59	838-968	14	60-69
HI	1000	3000K	94	60	901-1041	14	64-74
HI-27	1400	2700K	94	57	1098-1262	20	55-63
HI	1400	3000K	93	58	1181-1357	20	59-68
HI-2-27	1000	2700K	94	62	971	14.5	67
HI-2	1000	3000K	94	63	1044	14.5	72
WD	350	3000-1800K	97	82	727-837	14.5	50-58
WD-2	350	2800-2200K	96	77	728-834	14.5	40-58
TW	700	4700-2200K	95	79	803-1018	14	57-73

Performance summary for HI LED with 15°, 25°, and 40° optic options and HI-2 LED with 10° optic option.

Performance summary for WD LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.

Performance summary for TW LED at 3000K with 15°, 25°, and 40° optic options.

804D-S/J2S w/ 2.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	24°	43°	47°	13° x 39°
15° Narrow Spot	HI	21°	31°	54°	67°	22° x 48°
15° Narrow Spot	WD/WD-2	24°	33°	54°	66°	26° x 48°
15° Narrow Spot	TW	23°	30°	48°	54°	27° x 34°
25° Narrow Flood	HI	29°	37°	57°	71°	30° x 55°
25° Narrow Flood	WD/WD-2	31°	38°	58°	70°	70° x 71°
25° Narrow Flood	TW	30°	37°	57°	69°	31° x 53°
40° Flood	HI	42°	45°	46°	80°	41° x 63°
40° Flood	WD/WD-2	39°	44°	64°	77°	76° x 77°
40° Flood	TW	38°	43°	63°	76°	37° x 61°

*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

804D-S/J2S w/ FS-LG-P/NL 2.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

	10° - Very Narrow Spot	15° - Narrow Spot	25° - Narrow Flood	40° - Flood
STANDARD OUTPUT	804D-S/J2S-HI-2-10/1000 2ft - 3,948 fc Ø0.4 ft 4ft - 987 fc Ø0.8 ft 6ft - 439 fc Ø1.2 ft 8ft - 247 fc Ø1.5 ft 10ft - 158 fc Ø1.9 ft CBCP: 15,837 cd	804D-S/J2S-HI-15/1000 2ft - 1,425 fc Ø0.7 ft 4ft - 356 fc Ø1.3 ft 6ft - 158 fc Ø2.0 ft 8ft - 89 fc Ø2.7 ft 10ft - 57 fc Ø3.3 ft CBCP: 5,723 cd	804D-S/J2S-HI-25/1000 2ft - 728 fc Ø1.0 ft 4ft - 182 fc Ø2.0 ft 6ft - 81 fc Ø3.0 ft 8ft - 46 fc Ø4.0 ft 10ft - 29 fc Ø5.0 ft CBCP: 2,935 cd	804D-S/J2S-HI-40/1000 2ft - 436 fc Ø1.5 ft 4ft - 109 fc Ø3.0 ft 6ft - 48 fc Ø4.6 ft 8ft - 27 fc Ø6.1 ft 10ft - 17 fc Ø7.6 ft CBCP: 1,747 cd
		15° - Narrow Spot 804D-S/J2S-HI-15/1400 2ft - 1,868 fc Ø0.7 ft 4ft - 467 fc Ø1.3 ft 6ft - 208 fc Ø2.0 ft 8ft - 117 fc Ø2.6 ft 10ft - 75 fc Ø3.3 ft CBCP: 7,527 cd	25° - Narrow Flood 804D-S/J2S-HI-25/1400 2ft - 962 fc Ø1.0 ft 4ft - 241 fc Ø2.0 ft 6ft - 107 fc Ø3.0 ft 8ft - 60 fc Ø4.0 ft 10ft - 38 fc Ø5.0 ft CBCP: 3,869 cd	40° - Flood 804D-S/J2S-HI-40/1400 2ft - 571 fc Ø1.5 ft 4ft - 143 fc Ø3.0 ft 6ft - 63 fc Ø4.6 ft 8ft - 36 fc Ø6.1 ft 10ft - 23 fc Ø7.6 ft CBCP: 2,286 cd
		15° - Narrow Spot 804D-S/J2S-WD-15/350 2ft - 862 fc Ø0.8 ft 4ft - 215 fc Ø1.7 ft 6ft - 96 fc Ø2.5 ft 8ft - 54 fc Ø3.4 ft 10ft - 34 fc Ø4.2 ft CBCP: 3,448 cd	25° - Narrow Flood 804D-S/J2S-WD-25/350 2ft - 534 fc Ø1.1 ft 4ft - 133 fc Ø2.1 ft 6ft - 59 fc Ø3.2 ft 8ft - 33 fc Ø4.3 ft 10ft - 21 fc Ø5.4 ft CBCP: 2,136 cd	40° - Flood 804D-S/J2S-WD-40/350 2ft - 399 fc Ø1.4 ft 4ft - 100 fc Ø2.8 ft 6ft - 44 fc Ø4.2 ft 8ft - 25 fc Ø5.6 ft 10ft - 16 fc Ø7.0 ft CBCP: 1,598 cd
		15° - Narrow Spot 804D-S/J2S-TW-15T/700 2ft - 1,403 fc Ø0.8 ft 4ft - 351 fc Ø1.6 ft 6ft - 156 fc Ø2.5 ft 8ft - 88 fc Ø3.3 ft 10ft - 56 fc Ø4.1 ft CBCP: 5,613 cd	25° - Narrow Flood 804D-S/J2S-TW-25/700 2ft - 606 fc Ø1.0 ft 4ft - 151 fc Ø2.1 ft 6ft - 67 fc Ø3.1 ft 8ft - 38 fc Ø4.2 ft 10ft - 24 fc Ø5.2 ft CBCP: 2,423 cd	40° - Flood 804D-S/J2S-TW-40/700 2ft - 427 fc Ø1.4 ft 4ft - 107 fc Ø2.8 ft 6ft - 47 fc Ø4.2 ft 8ft - 27 fc Ø5.6 ft 10ft - 17 fc Ø7.0 ft CBCP: 1,708 cd

Performance shown for 3000K. Output varies by CCT.

804D-S/J2S w/ FS-P TRIM + WW-8 WALL WASH ACCESSORY - PERFORMANCE SUMMARY

LED	OUTPUT	OPTIC OPTION	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	40	2700K	94	57	617	14	44
HI	1000	40	3000K	94	58	663	14	47
HI-27	1400	40	2700K	94	55	801	20	40
HI	1400	40	3000K	93	56	861	20	43
HI-2-27	1000	10-FL	2700K	94	61	471	14.5	32
HI-2	1000	10-FL	3000K	94	62	506	14.5	35
WD	350	40	3000-1800K	97	83	532	14.5	37
WD-2	350	40	2800-2200K	97	78	528	14.5	36
TW	700	40	4700-2200K	96	80	568	14	41

Performance summary for **WD** LED at 3000K, **WD-2** LED at 2800K, and **TW** LED at 3000K.

804D-S/J2S-HI-40/1000 w/ FS-P TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft						
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft		
	DISTANCE FROM CEILING	0.5 ft	1.0	1.1	1.0	0.9	0.8	0.9	0.3	0.3	0.3	0.3	0.2	0.3
		1.5 ft	27.3	31.0	27.3	25.1	25.0	25.1	13.4	14.8	13.4	12.6	12.1	12.6
		2.5 ft	28.0	32.6	28.0	25.2	28.8	25.2	19.6	22.8	19.6	18.1	20.0	18.1
		3.5 ft	18.4	20.8	18.4	16.7	19.3	16.7	16.1	18.7	16.1	14.8	17.2	14.8
		4.5 ft	11.3	12.4	11.3	10.5	11.8	10.5	11.2	12.7	11.2	10.4	12.0	10.4
		5.5 ft	7.1	7.6	7.1	6.7	7.3	6.7	7.6	8.4	7.6	7.1	8.0	7.1
		6.5 ft	4.6	4.9	4.6	4.4	4.8	4.4	5.2	5.6	5.2	4.9	5.4	4.9
		7.5 ft	3.1	3.3	3.1	3.0	3.2	3.0	3.6	3.9	3.6	3.5	3.8	3.5
		8.5 ft	2.2	2.3	2.2	2.2	2.3	2.2	2.6	2.8	2.6	2.5	2.7	2.5
		9.5 ft	1.6	1.7	1.6	1.6	1.6	1.6	1.9	2.0	1.9	1.9	2.0	1.9

Note: With **HI** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

804D-S/J2S-HI-40/1400 w/ FS-P TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft						
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft		
	DISTANCE FROM CEILING	0.5 ft	1.3	1.5	1.3	1.3	1.0	1.3	0.4	0.4	0.4	0.4	0.3	0.4
		1.5 ft	35.4	40.2	35.4	32.5	32.4	32.5	17.3	19.2	17.3	16.3	15.7	16.3
		2.5 ft	36.3	42.4	36.3	32.8	37.4	32.8	25.5	29.6	25.5	23.5	26.0	23.5
		3.5 ft	23.9	27.1	23.9	21.7	25.1	21.7	20.9	24.2	20.9	19.2	22.3	19.2
		4.5 ft	14.7	16.1	14.7	13.6	15.3	13.6	14.6	16.5	14.6	13.5	15.6	13.5
		5.5 ft	9.2	9.9	9.2	8.7	9.5	8.7	9.9	10.9	9.9	9.3	10.4	9.3
		6.5 ft	6.0	6.4	6.0	5.8	6.2	5.8	6.8	7.3	6.8	6.4	7.1	6.4
		7.5 ft	4.1	4.3	4.1	3.9	4.2	3.9	4.7	5.0	4.7	4.6	4.9	4.6
		8.5 ft	2.9	3.0	2.9	2.8	2.9	2.8	3.4	3.6	3.4	3.3	3.5	3.3
		9.5 ft	2.1	2.2	2.1	2.0	2.1	2.0	2.5	2.6	2.5	2.5	2.6	2.5

Note: With **HI** LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

804D-S/J2S-HI-2-10-FL/1000 w/ FS-P TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft						
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft		
	DISTANCE FROM CEILING	0.5 ft	0.3	0.3	0.3	0.3	0.2	0.3	0.1	0.1	0.1	0.1	0.1	0.1
		1.5 ft	14.4	15.2	14.4	13.0	11.8	13.0	5.6	5.7	5.6	5.2	4.5	5.2
		2.5 ft	20.2	22.2	20.2	17.9	19.2	17.9	12.7	13.9	12.7	11.5	12.0	11.5
		3.5 ft	14.8	16.0	14.8	13.4	14.7	13.4	12.1	13.3	12.1	11.0	12.1	11.0
		4.5 ft	9.6	10.1	9.6	8.9	9.6	8.9	9.1	9.8	9.1	8.4	9.2	8.4
		5.5 ft	6.2	6.4	6.2	5.8	6.2	5.8	6.4	6.8	6.4	6.0	6.5	6.0
		6.5 ft	4.1	4.2	4.1	3.9	4.1	3.9	4.5	4.7	4.5	4.3	4.5	4.3
		7.5 ft	2.8	2.9	2.8	2.7	2.8	2.7	3.2	3.3	3.2	3.1	3.2	3.1
		8.5 ft	2.0	2.0	2.0	1.9	2.0	1.9	2.3	2.4	2.3	2.2	2.3	2.2
		9.5 ft	1.5	1.5	1.5	1.4	1.4	1.4	1.7	1.8	1.7	1.7	1.7	1.7

Note: With HI-2 LED option, use 10° optic + FL lens and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

804D-S/J2S-WD-40/350 w/ FS-P TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft						
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft		
	DISTANCE FROM CEILING	0.5 ft	1.1	1.4	1.1	1.0	0.9	1.0	0.3	0.4	0.3	0.3	0.3	0.3
		1.5 ft	21.8	25.5	21.8	19.8	20.3	19.8	10.5	12.0	10.5	9.7	9.8	9.7
		2.5 ft	23.8	28.4	23.8	21.2	24.9	21.2	16.3	19.5	16.3	14.9	17.0	14.9
		3.5 ft	16.0	18.2	16.0	14.4	16.9	14.4	13.8	16.3	13.8	12.6	14.9	12.6
		4.5 ft	9.8	10.8	9.8	9.1	10.3	9.1	11.1	11.1	11.1	9.0	10.5	9.0
		5.5 ft	6.2	6.6	6.2	5.8	6.4	5.8	7.3	7.3	7.3	6.2	7.0	6.2
		6.5 ft	4.0	4.2	4.0	3.8	4.1	3.8	4.9	4.9	4.9	4.3	4.7	4.3
		7.5 ft	2.7	2.8	2.7	2.7	2.8	2.7	3.4	3.4	3.4	3.0	3.3	3.0
		8.5 ft	1.9	2.0	1.9	1.9	2.0	1.9	2.4	2.4	2.4	2.2	2.4	2.2
		9.5 ft	1.4	1.4	1.4	1.4	1.4	1.4	1.7	1.8	1.7	1.6	1.7	1.6

Note: With WD or WD-2 LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

804D-S/J2S-TW-40/700 w/ FS-P TRIM + WW-8 WALL WASH ACCESSORY – FOOTCANDLES ON WALL

DISTANCE TO WALL		2.0 ft						2.5 ft						
ON CENTER SPACING			2.0 ft			2.5 ft			2.5 ft			3.0 ft		
	DISTANCE FROM CEILING	0.5 ft	1.0	1.3	1.0	0.6	0.6	0.6	0.2	0.2	0.2	0.2	0.2	
		1.5 ft	22.0	24.9	22.0	20.3	20.5	20.3	10.4	11.6	10.4	9.6	9.5	9.6
		2.5 ft	24.7	28.1	24.7	23.3	26.6	23.3	17.3	20.0	17.3	15.9	17.7	15.9
		3.5 ft	16.6	18.1	16.6	16.2	18.4	16.2	15.3	17.3	15.3	14.0	16.1	14.0
		4.5 ft	10.1	10.8	10.1	10.2	11.3	10.2	10.9	12.0	10.9	10.1	11.4	10.1
		5.5 ft	6.3	6.6	6.3	6.5	7.0	6.5	7.4	7.9	7.4	7.0	7.7	7.0
		6.5 ft	4.1	4.2	4.1	4.3	4.5	4.3	5.0	5.3	5.0	4.8	5.2	4.8
		7.5 ft	2.8	2.8	2.8	2.9	3.1	2.9	3.5	3.7	3.5	3.4	3.6	3.4
		8.5 ft	2.0	2.0	2.0	2.1	2.1	2.1	2.5	2.6	2.5	2.4	2.6	2.4
		9.5 ft	1.4	1.4	1.4	1.5	1.6	1.5	1.9	1.9	1.9	1.8	1.9	1.8

Note: With TW LED option, use 40° optic and 20° aiming angle for optimal performance. Data shown for 3000K CCT.

804D-S/K2S w/ FS-P 1.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	59	854-992	14	61-71
HI	1000	3000K	94	60	918-1067	14	66-76
HI-27	1400	2700K	94	57	1123-1309	20	56-65
HI	1400	3000K	93	58	1208-1408	20	60-70
HI-2-27	1000	2700K	94	62	1025	14.5	71
HI-2	1000	3000K	94	63	1102	14.5	76
WD	350	3000-1800K	97	81	740-871	14.5	51-60
WD-2	350	2800-2200K	97	78	739-861	14.5	51-59


Performance summary for HI LED with 15°, 25°, and 40° optic options and HI-2 LED with 10° optic option.
Performance summary for WD LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.

804D-S/K2S w/ 1.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	25°	42°	44°	13° x 37°
15° Narrow Spot	HI	21°	31°	49°	58°	22° x 39°
15° Narrow Spot	WD/WD-2	25°	33°	51°	61°	36° x 28°
25° Narrow Flood	HI	29°	36°	53°	64°	30° x 48°
25° Narrow Flood	WD/WD-2	30°	37°	54°	64°	32° x 45°
40° Flood	HI	42°	45°	63°	77°	46° x 52°
40° Flood	WD/WD-2	39°	43°	61°	72°	38° x 58°

*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

804D-S/K2S w/ FS-P 1.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

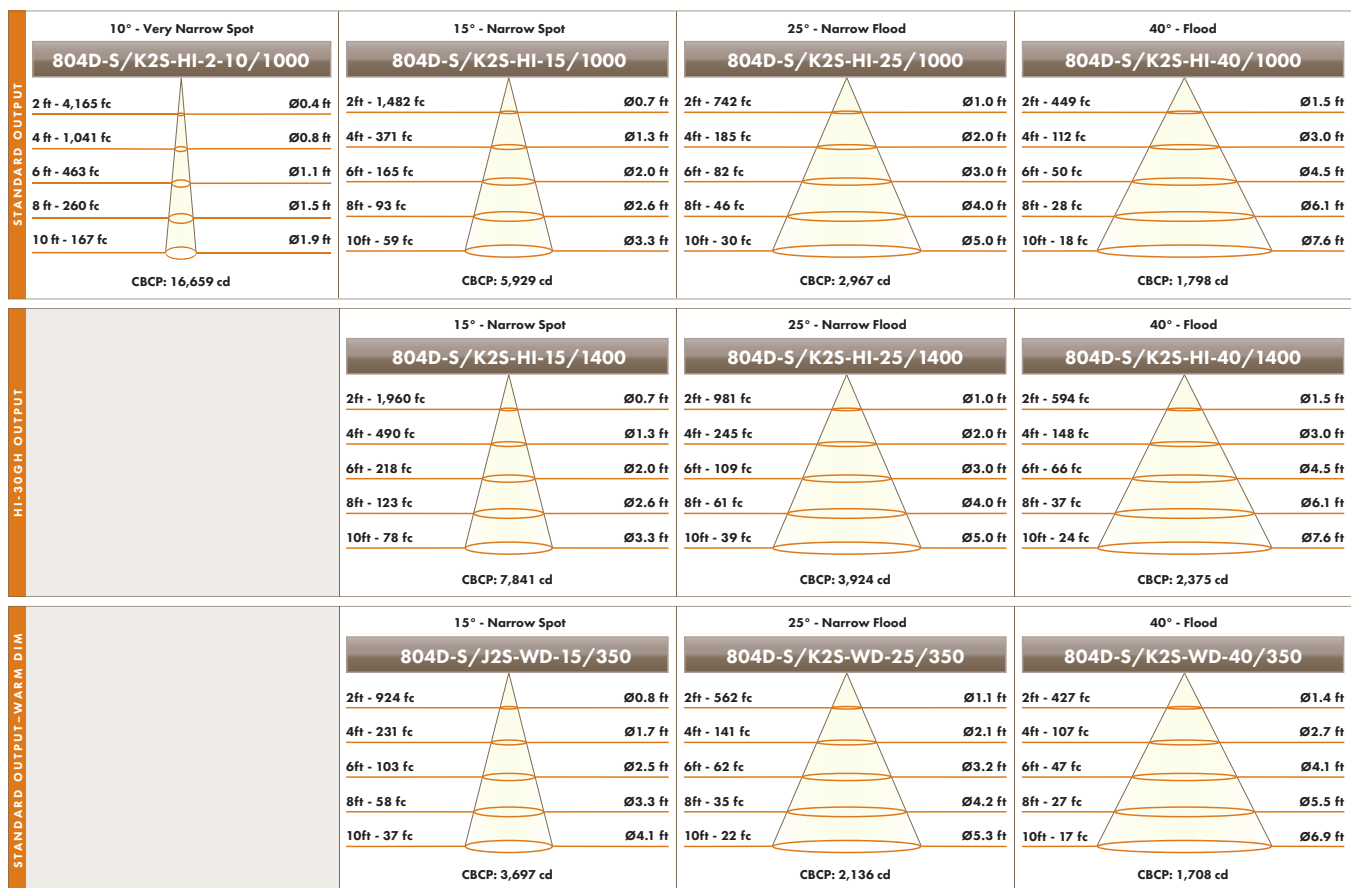

Performance shown for 3000K. Output varies by CCT.

804D-S/K2S w/ FS-LG-P/NL 2.75" APERTURE TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	94	59	924-1042	14	66-74
HI	1000	3000K	94	60	994-1120	14	71-80
HI-27	1400	2700K	94	57	1229-1369	20	61-68
HI	1400	3000K	93	58	1322-1472	20	66-74
HI-2-27	1000	2700K	94	62	1050	14.5	72
HI-2	1000	3000K	94	63	1129	14.5	78
WD	350	3000-1800K	97	81	821-923	14.5	57-64
WD-2	350	2800-2200K	97	78	819-915	14.5	56-63


Performance summary for HI LED with 15°, 25°, and 40° optic options and HI-2 LED with 10° optic option.
Performance summary for WD LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.

804D-S/K2S w/ 2.75" APERTURE TRIM - OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTIC OPTIONS	LED OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
		+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	HI-2	14°	25°	44°	47°	13° x 39°
15° Narrow Spot	HI	21°	31°	52°	65°	23° x 40°
15° Narrow Spot	WD/WD-2	25°	33°	54°	68°	26° x 36°
25° Narrow Flood	HI	30°	37°	57°	73°	30° x 53°
25° Narrow Flood	WD/WD-2	31°	38°	58°	76°	33° x 47°
40° Flood	HI	42°	46°	66°	88°	46° x 53°
40° Flood	WD/WD-2	39°	44°	64°	85°	39° x 60°

*Beam enhancing lens used in combination with 10°, 15°, 25°, or 40° optic to achieve desired beam spread.

804D-S/K2S w/ FS-LG-P/NL 2.75" APERTURE TRIM - CONE OF LIGHT DIAGRAMS

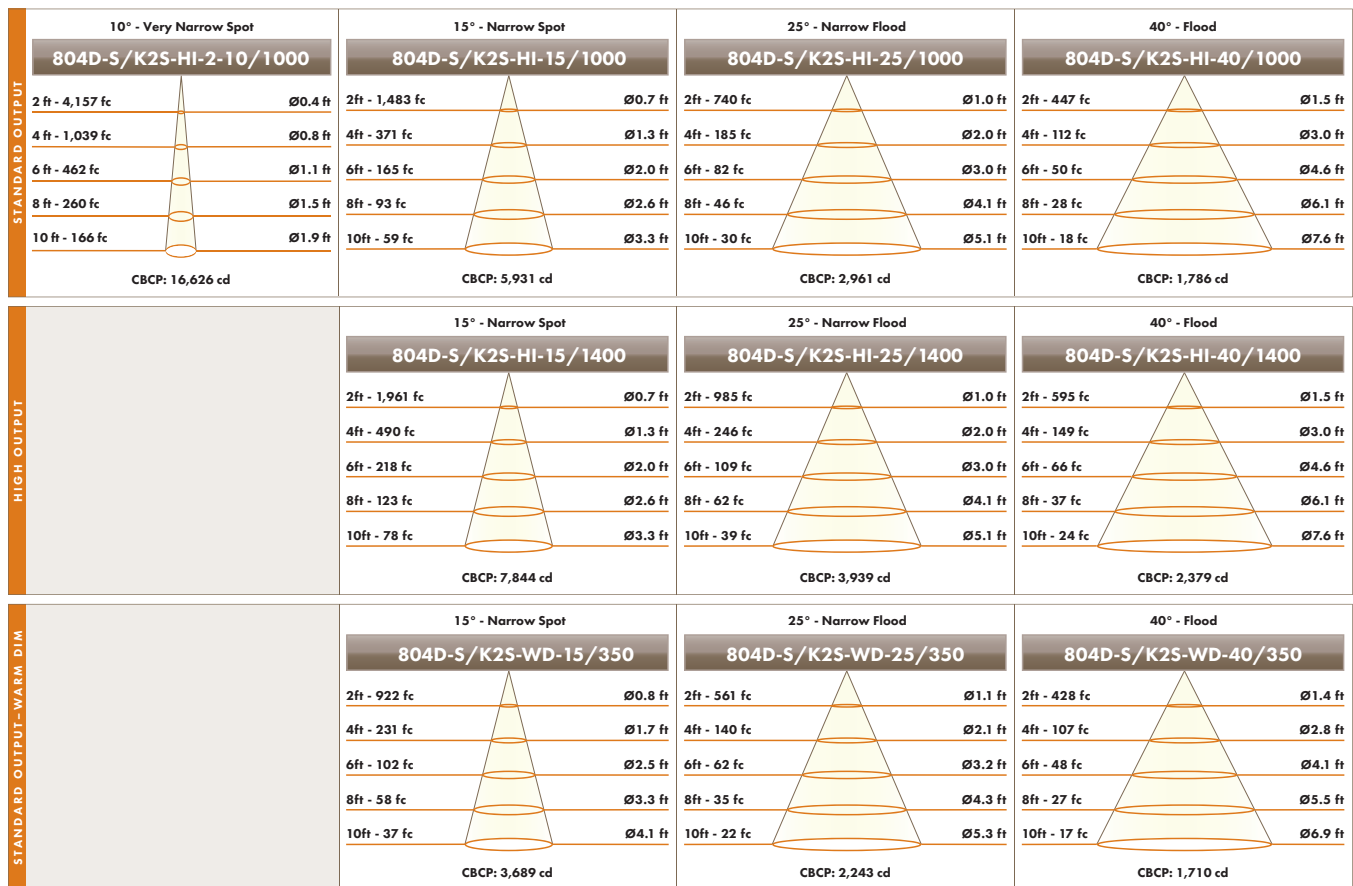

Performance shown for 3000K. Output varies by CCT.

804D-S/M2S-S w/ FS-P TRIM - PERFORMANCE SUMMARY

LED	OUTPUT	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	1000	2700K	93	55	565-686	14	40-49
HI	1000	3000K	93	56	607-738	14	43-53
HI-27	1400	3000K	93	53	734-884	20	37-44
HI	1400	3000K	93	53	786-951	20	39-48
HI-2-27	1000	2700K	93	58	797	14.5	55
HI-2	1000	3000K	93	59	857	14.5	59
WD	350	3000-1800K	97	78	470-569	14.5	32-39
WD-2	350	2800-2200K	96	74	469-560	14.5	32-39

Performance summary for HI LED with 15°, 25°, and 40° optic options and HI-2 LED with 10° optic option.
 Performance summary for WD LED at 3000K and WD-2 LED at 2800K with 15°, 25°, and 40° optic options.

804D-S/M2S-S w/ FS-P TRIM - VERTICAL AIMING RANGE

