

Photometric / Colorimetric / Electric Report

Fixture Model:

202-R-BV-HI-30-25-PR1-2-FLR-2-BV

Trim Model:

Date:

7/7/2026



Light efficiency:

70 Lumen/Watt

Light quality:

CRI: 93.3

Color temperature:

3039 K

CIE 1931:

**x: 0.434
y: 0.402**


Output: 935 lm

Peak: 3232 cd



Power: 13.3 W

PF: 0.99


Spectra:

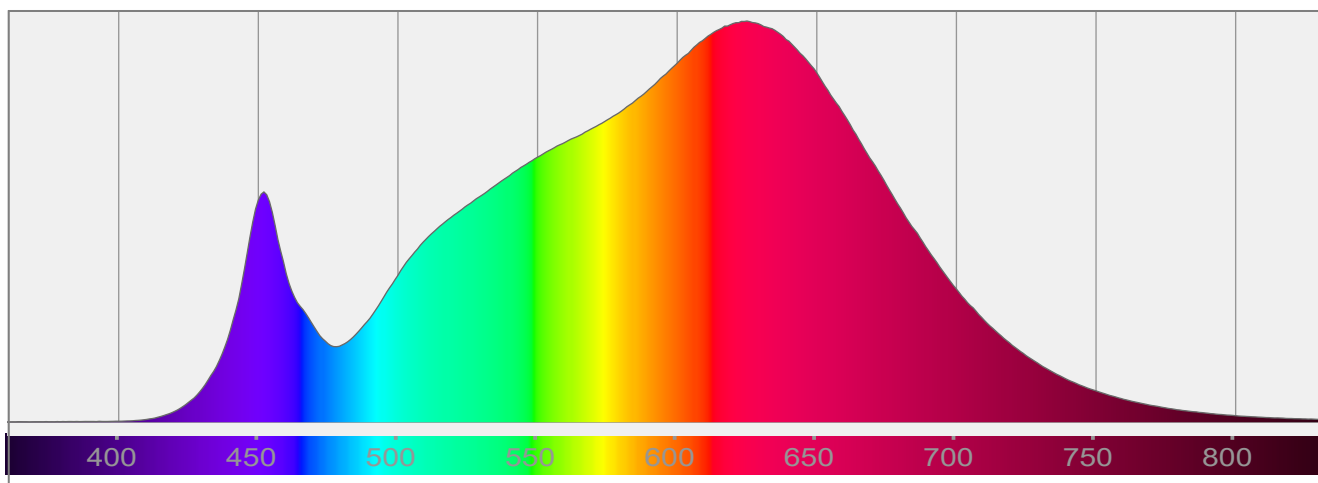


Color Details

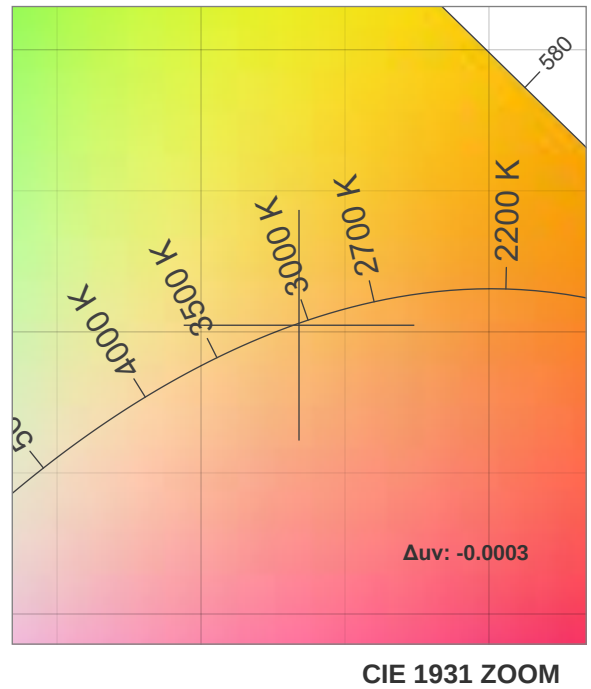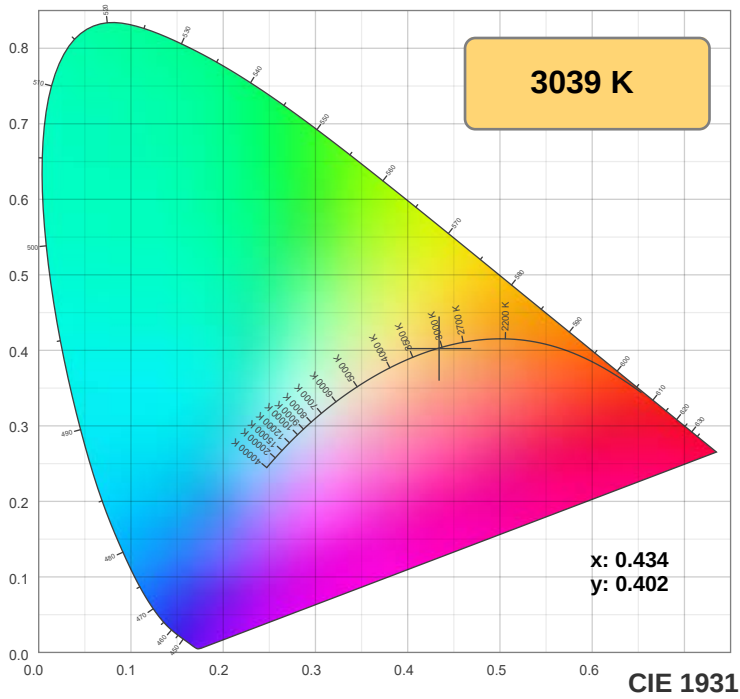

TM-30: 91.9

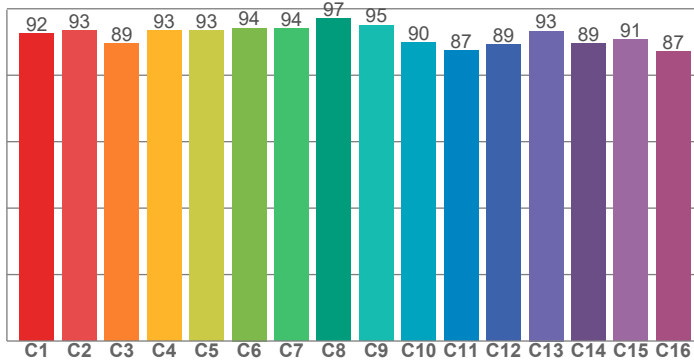

CRI: 93.3 (R1-R8)

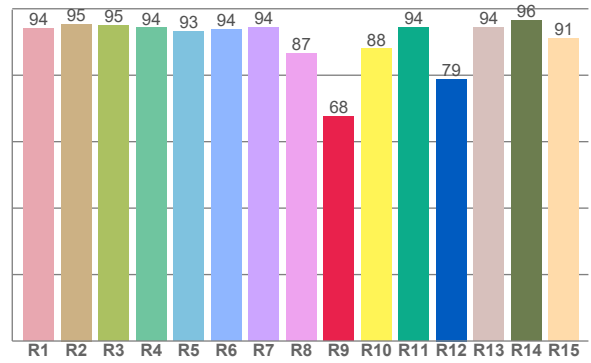

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94.0	95.4	95.0	94.2	93.1	93.7	94.3	86.5	67.6	87.9	94.5	78.9	94.3	96.4	91.1


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.5	93.4	89.5	93.4	93.3	94.2	93.9	97.0	95.1	89.7	87.3	89.3	93.3	89.4	90.8	87.2

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
90.6	97.1	86.7	87.8	91.4	91.0	89.8	92.8	96.9	92.8	92.7	93.1	93.5	89.2	89.5

CQS: 91.1

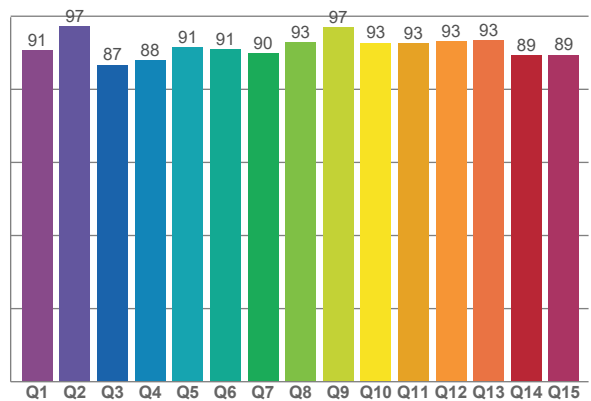

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3039 K	93.3	67.6	91.9	100.9	91.1	0.434	0.402	0.249	0.347	-0.0003

TM-30 Details







Rf 91.9

Fidelity index Rf


Rg 100.9

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	92	-4%	-1%
2	93	-3%	2%
3	89	-1%	5%
4	93	1%	4%
5	93	0%	3%
6	94	4%	0%
7	94	0%	-3%
8	97	0%	-2%
9	95	-2%	1%
10	90	-2%	5%
11	87	1%	9%
12	89	5%	4%
13	93	4%	-2%
14	89	6%	-6%
15	91	1%	-6%
16	87	0%	-10%

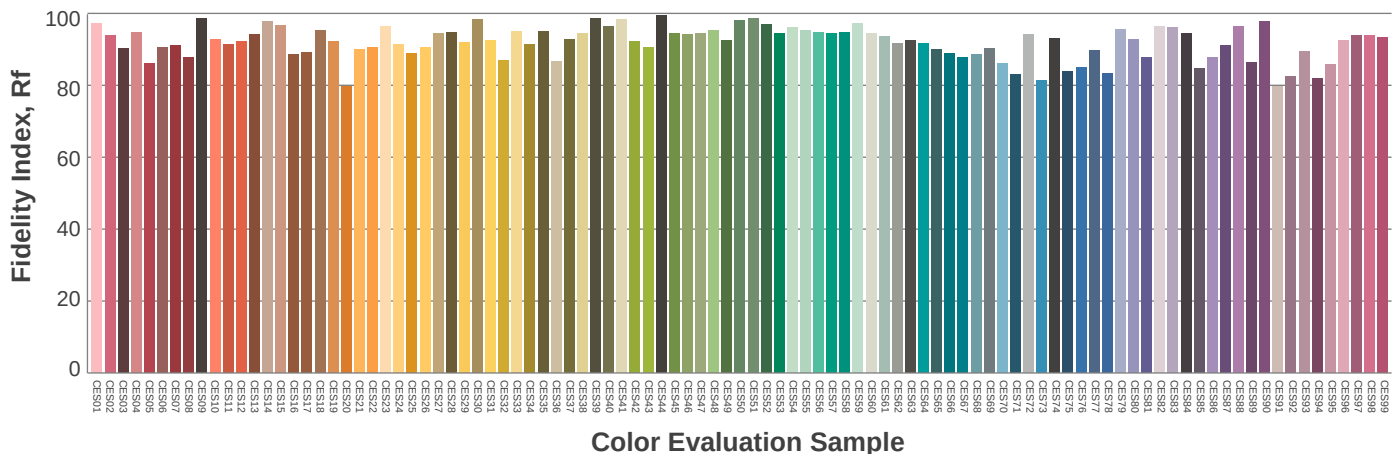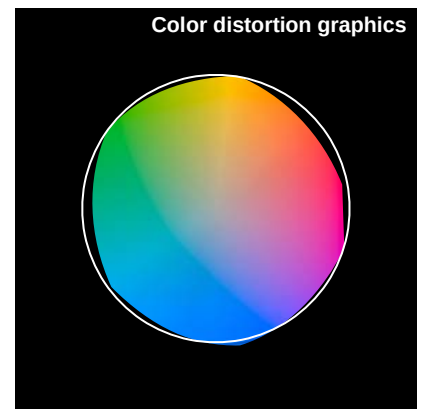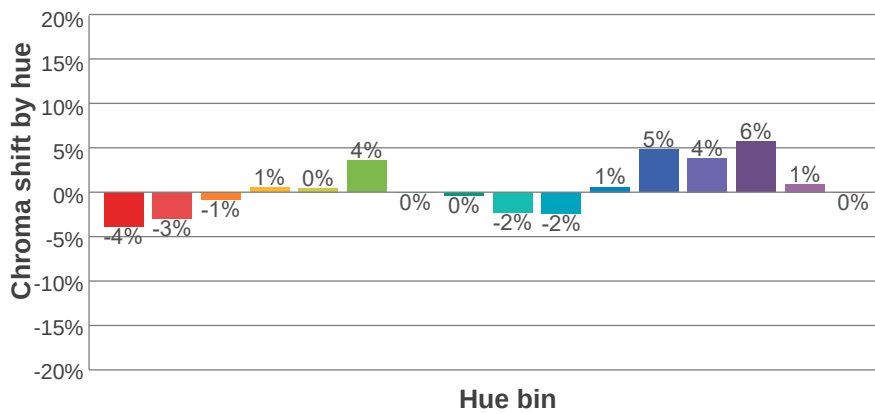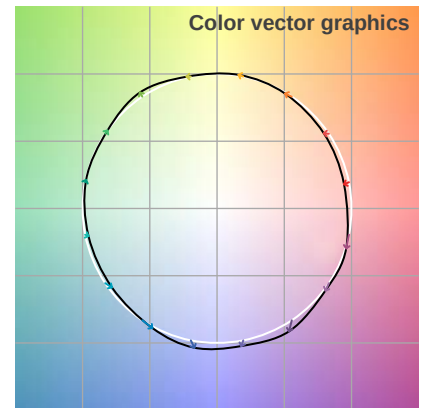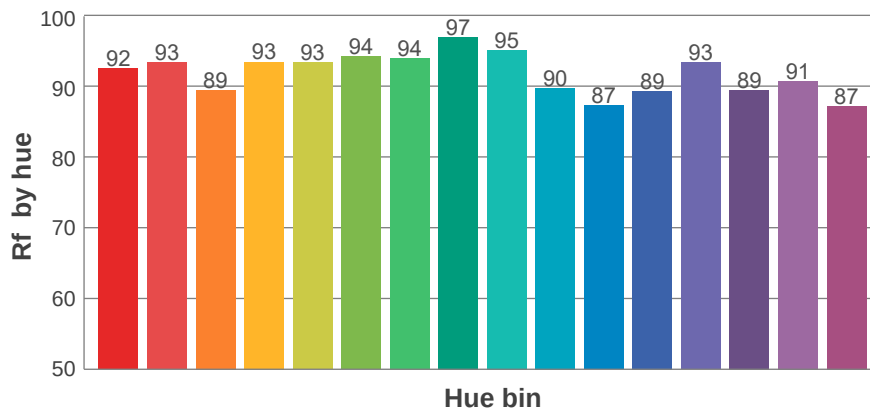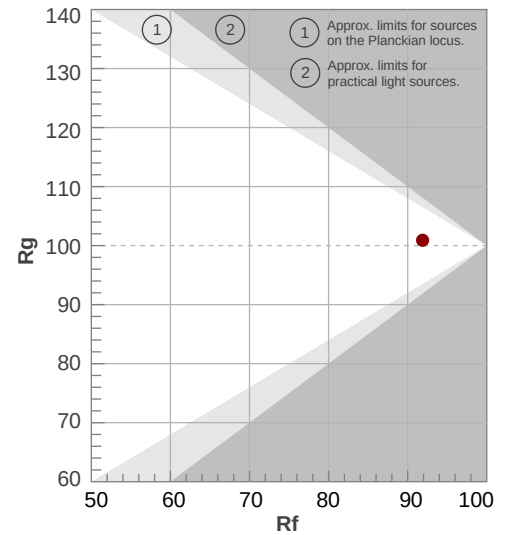

Beam Details

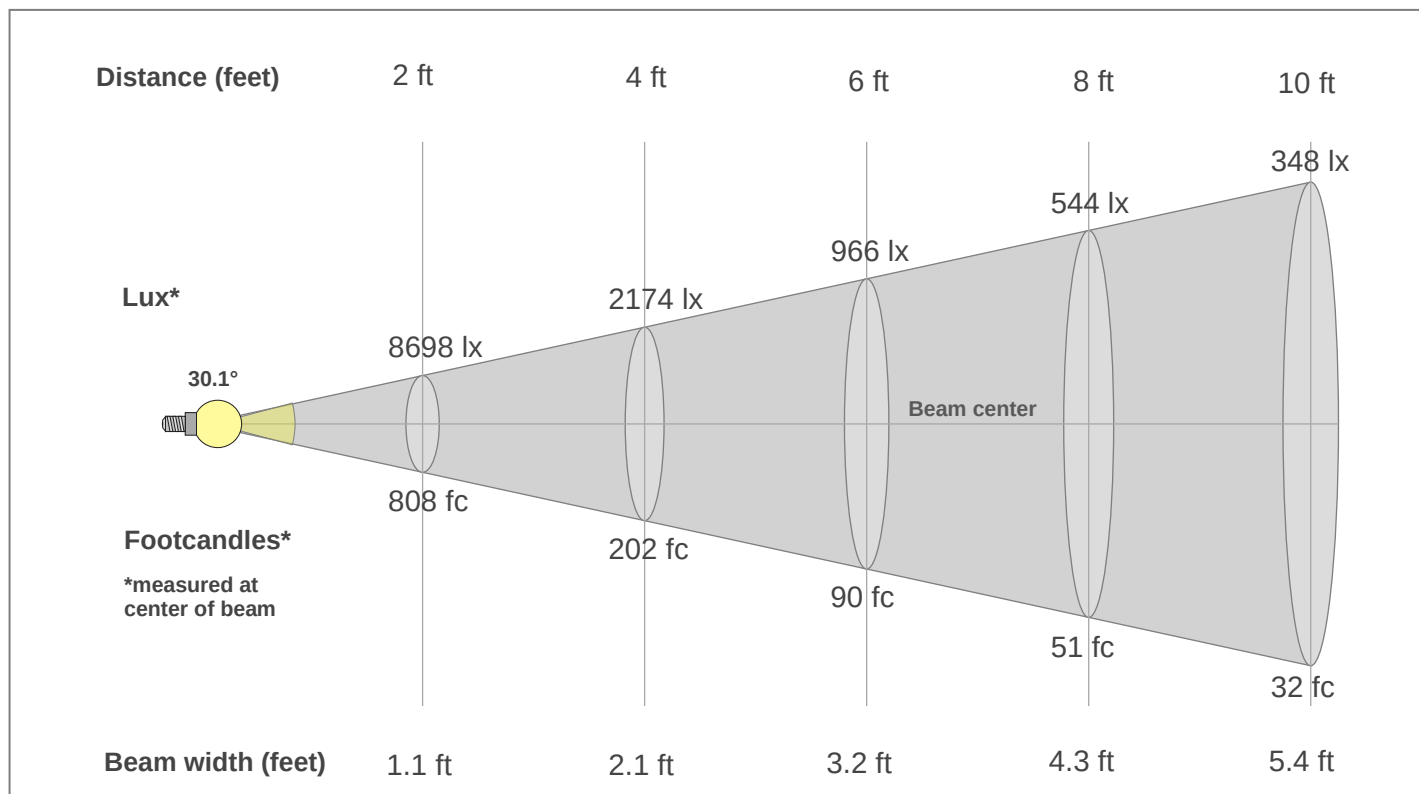

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3232lx	808lx	359lx	202lx	129lx	90lx	66lx	51lx	40lx	32lx	27lx	22lx	19lx	16lx	14lx	13lx	11lx	10lx	9lx	8lx
300.3fc	75.1fc	33.4fc	18.8fc	12fc	8.3fc	6.1fc	4.7fc	3.7fc	3fc	2.5fc	2.1fc	1.8fc	1.5fc	1.3fc	1.2fc	1fc	0.9fc	0.8fc	0.8fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3232	3204	3101	2934	2725	2465	2155	1809	1435	1061	740	513	370	278	214	166	126	91	62	42
100%	99%	96%	91%	84%	76%	67%	56%	44%	33%	23%	16%	11%	9%	7%	5%	4%	3%	2%	1%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3232	3204	3101	2934	2725	2465	2155	1809	1435	1061	740	513	370	278	214	166	126	91	62	42
100%	99%	96%	91%	84%	76%	67%	56%	44%	33%	23%	16%	11%	9%	7%	5%	4%	3%	2%	1%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3232	3204	3101	2934	2725	2465	2155	1809	1435	1061	740	513	370	278	214	166	126	91	62	42
100%	99%	96%	91%	84%	76%	67%	56%	44%	33%	23%	16%	11%	9%	7%	5%	4%	3%	2%	1%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
3232	3204	3101	2934	2725	2465	2155	1809	1435	1061	740	513	370	278	214	166	126	91	62	42
100%	99%	96%	91%	84%	76%	67%	56%	44%	33%	23%	16%	11%	9%	7%	5%	4%	3%	2%	1%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
30.1°	49.8°	69.3°	99.0%	98.3%