

Photometric / Colorimetric / Electric Report

Fixture Model:

202-S-BV-HI-30-40-PR1-2-FLS-2-BV

Trim Model:

Date:

7/31/2026



Light efficiency:

82 Lumen/Watt

Light quality:

CRI: 93.3

Color temperature:

3048 K

CIE 1931:

x: 0.433
y: 0.402


Output: 1095 lm

Peak: 2775 cd



Power: 13.3 W

PF: 0.99


Spectra:

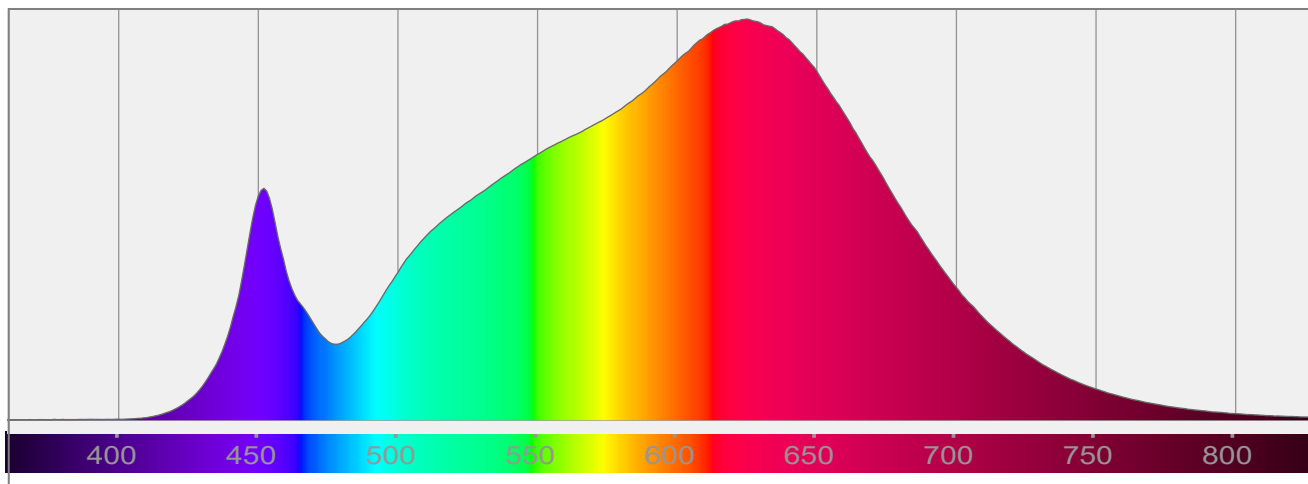


Color Details

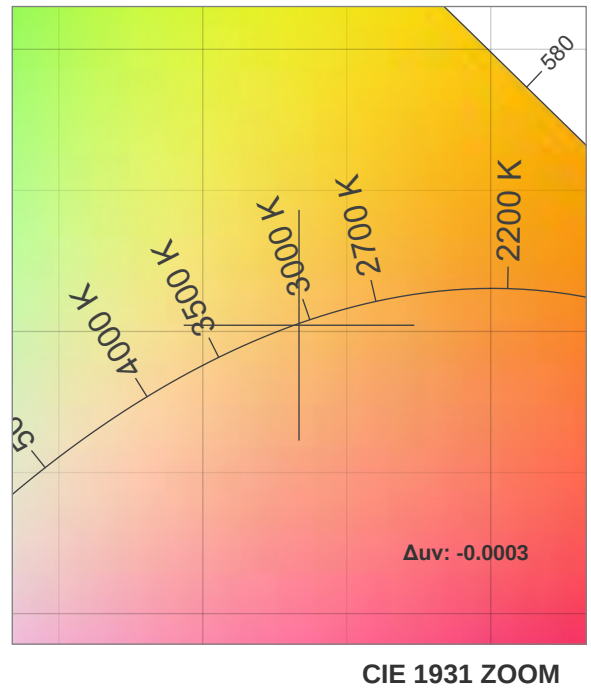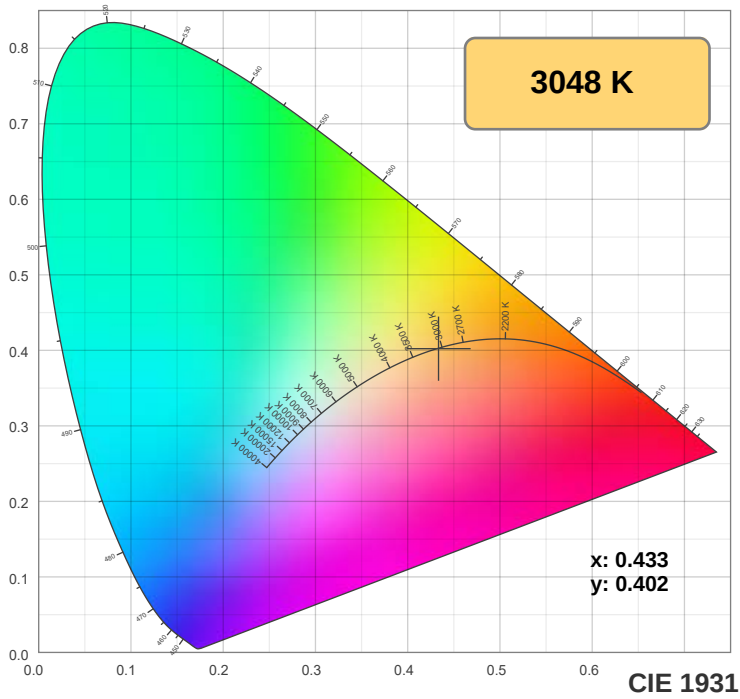

TM-30: 91.9

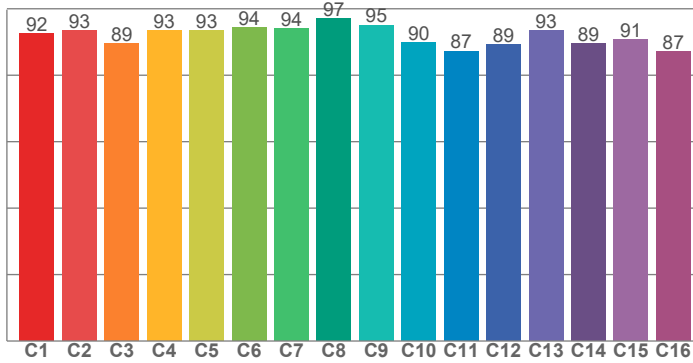

CRI: 93.3 (R1-R8)

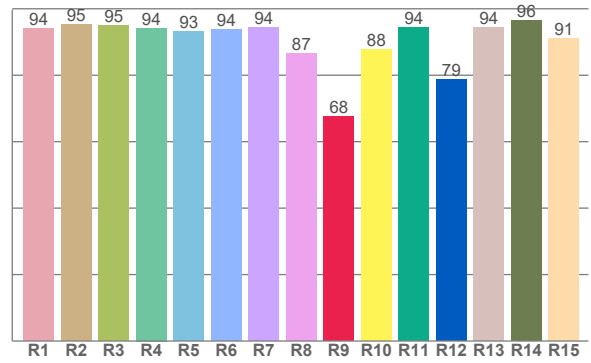

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94.0	95.4	95.0	94.2	93.1	93.6	94.4	86.5	67.6	87.9	94.5	78.8	94.3	96.4	91.1


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.5	93.4	89.5	93.5	93.3	94.2	94.0	97.0	95.1	89.7	87.3	89.3	93.3	89.4	90.8	87.1

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
90.6	97.2	86.7	87.9	91.4	91.0	89.8	92.8	96.9	92.8	92.7	93.1	93.5	89.2	89.5

CQS: 91.1

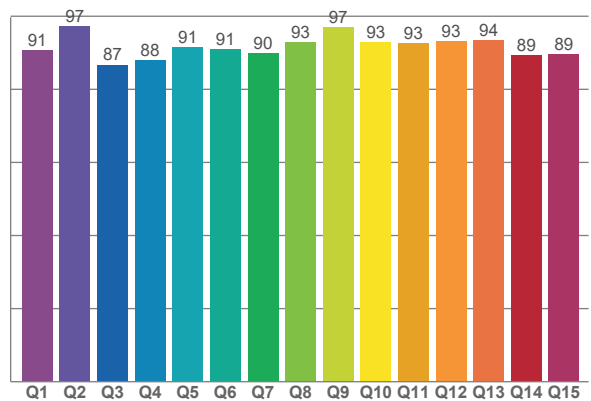

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3048 K	93.3	67.6	91.9	100.9	91.1	0.433	0.402	0.249	0.347	-0.0003

TM-30 Details







Rf 91.9

Fidelity index Rf


Rg 100.9

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	92	-4%	-1%
2	93	-3%	2%
3	89	-1%	5%
4	93	1%	4%
5	93	0%	3%
6	94	4%	0%
7	94	0%	-3%
8	97	0%	-2%
9	95	-2%	1%
10	90	-2%	5%
11	87	1%	9%
12	89	5%	4%
13	93	4%	-2%
14	89	6%	-6%
15	91	1%	-6%
16	87	0%	-10%

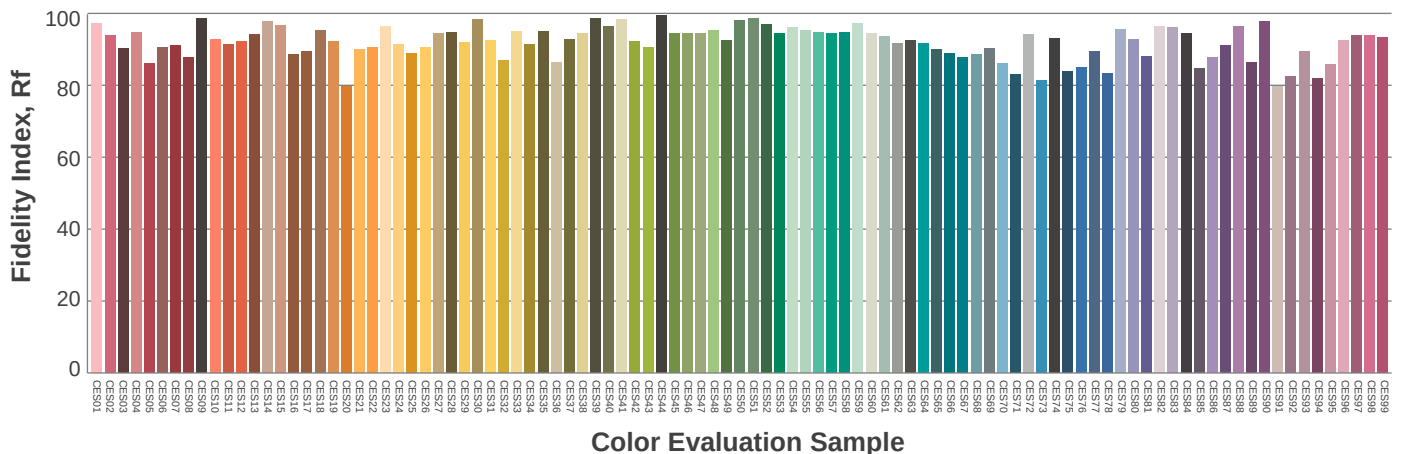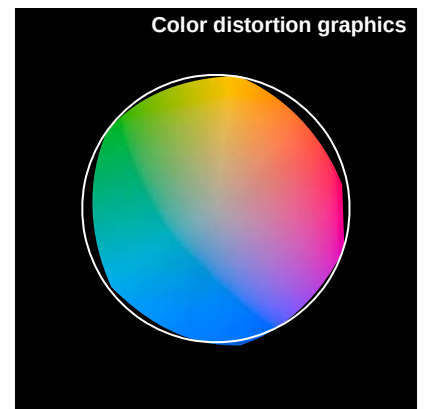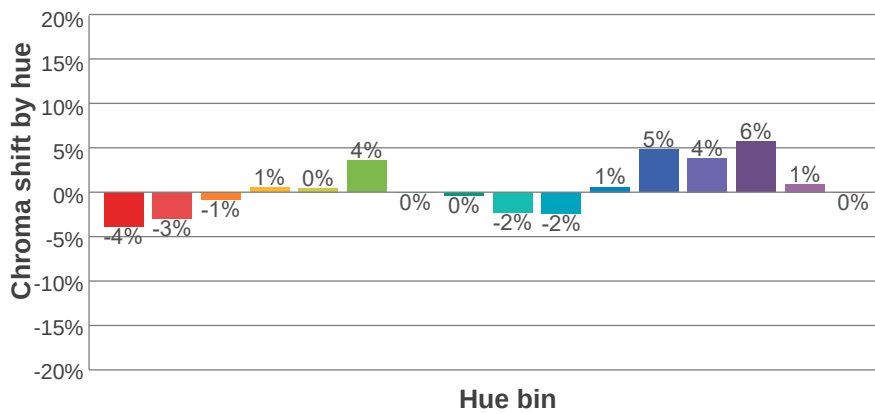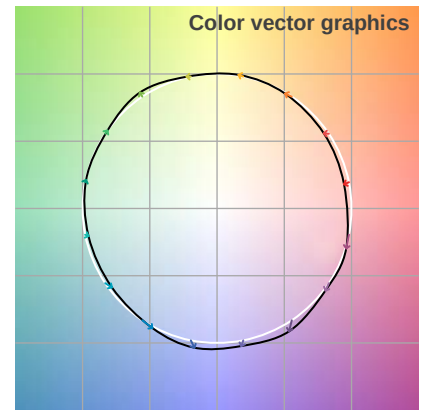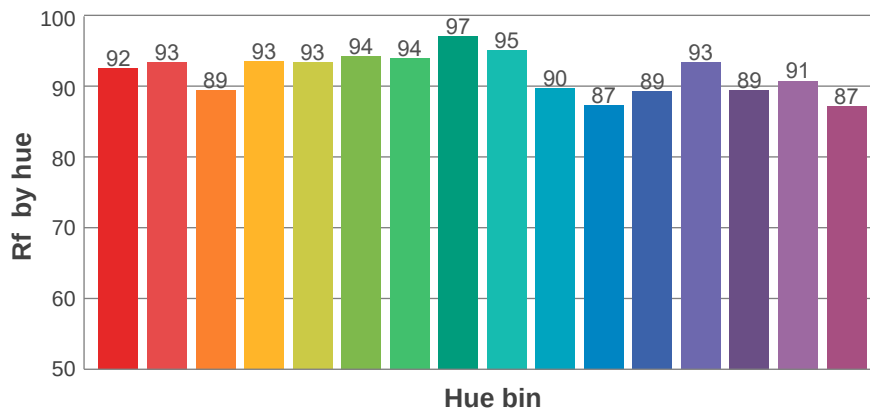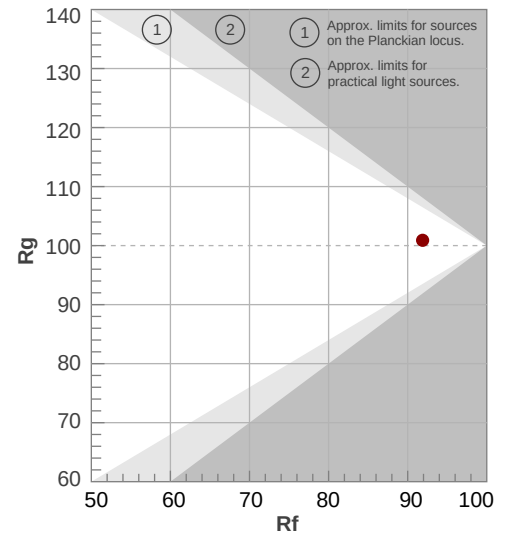

Beam Details

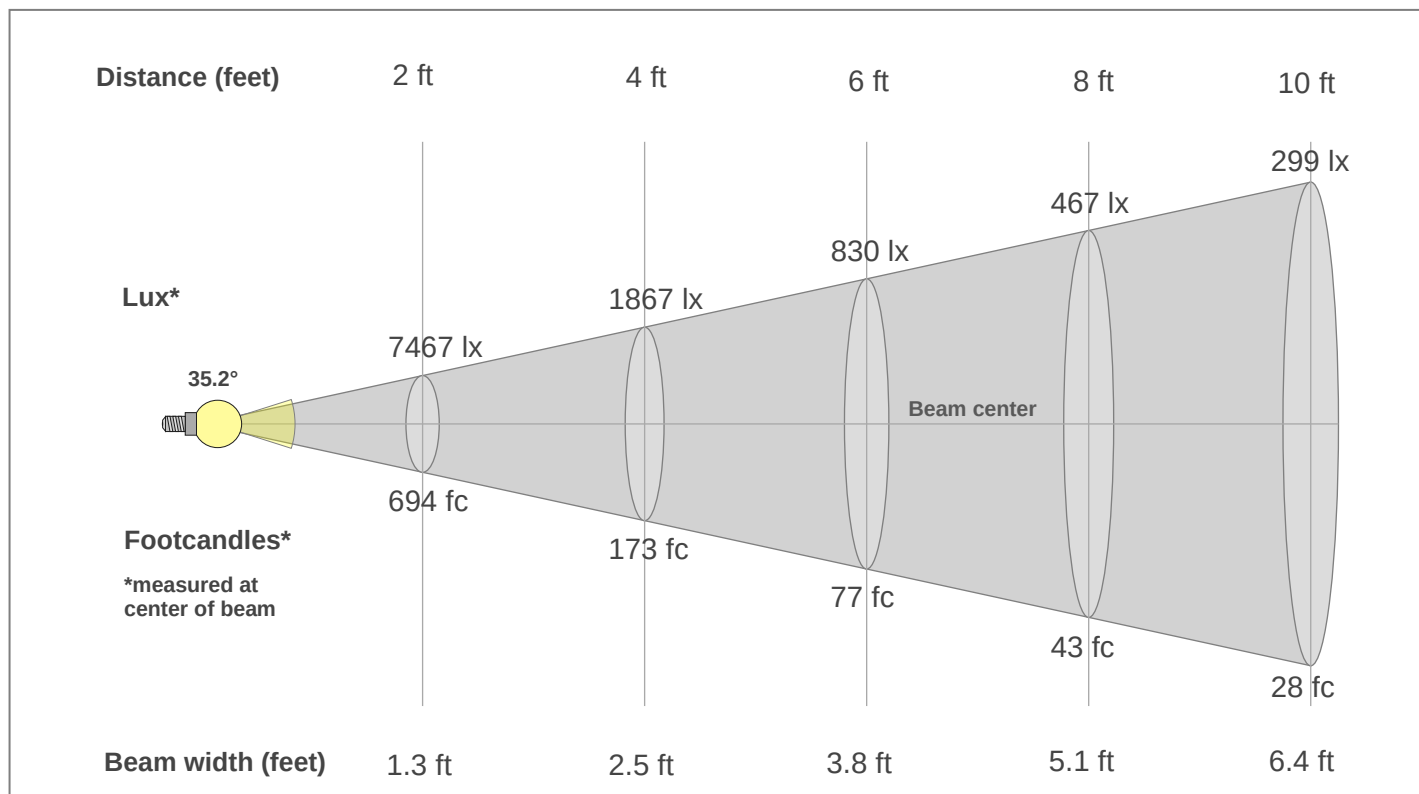

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2775lx	694lx	308lx	173lx	111lx	77lx	57lx	43lx	34lx	28lx	23lx	19lx	16lx	14lx	12lx	11lx	10lx	9lx	8lx	7lx
257.8fc	64.5fc	28.6fc	16.1fc	10.3fc	7.2fc	5.3fc	4fc	3.2fc	2.6fc	2.1fc	1.8fc	1.5fc	1.3fc	1.1fc	1fc	0.9fc	0.8fc	0.7fc	0.6fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2775	2765	2727	2650	2528	2354	2132	1879	1610	1335	1068	826	615	441	323	248	192	147	111	87
100%	100%	98%	95%	91%	85%	77%	68%	58%	48%	39%	30%	22%	16%	12%	9%	7%	5%	4%	3%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2775	2765	2727	2650	2528	2354	2132	1879	1610	1335	1068	826	615	441	323	248	192	147	111	87
100%	100%	98%	95%	91%	85%	77%	68%	58%	48%	39%	30%	22%	16%	12%	9%	7%	5%	4%	3%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2775	2765	2727	2650	2528	2354	2132	1879	1610	1335	1068	826	615	441	323	248	192	147	111	87
100%	100%	98%	95%	91%	85%	77%	68%	58%	48%	39%	30%	22%	16%	12%	9%	7%	5%	4%	3%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2775	2765	2727	2650	2528	2354	2132	1879	1610	1335	1068	826	615	441	323	248	192	147	111	87
100%	100%	98%	95%	91%	85%	77%	68%	58%	48%	39%	30%	22%	16%	12%	9%	7%	5%	4%	3%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
35.2°	58.2°	80.1°	99.1%	97.9%