

Photometric / Colorimetric / Electric Report

Fixture Model:
202-S-BV-WD-6-25-NSP-PR1-2-FLS-2-BV
Trim Model:

Date:
8/6/2026



Light efficiency:
59 Lumen/Watt


Light quality:
CRI: 92.2

Color temperature:
2772 K



CIE 1931:
x: 0.454
y: 0.409

Output:	790 lm
Peak:	2839 cd
Power:	13.5 W
PF:	0.99

Spectra:


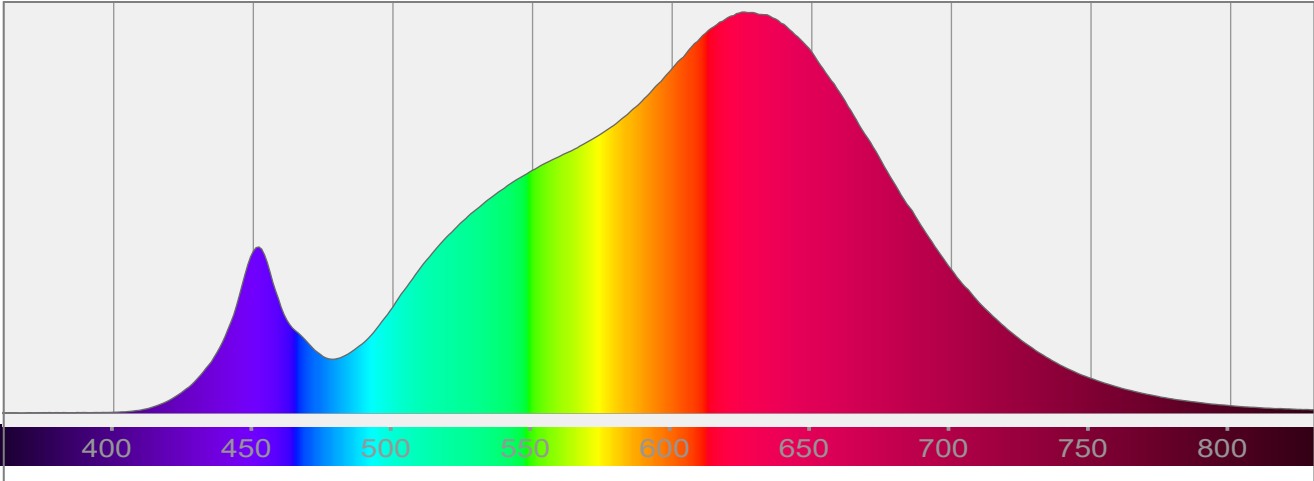


Color Details

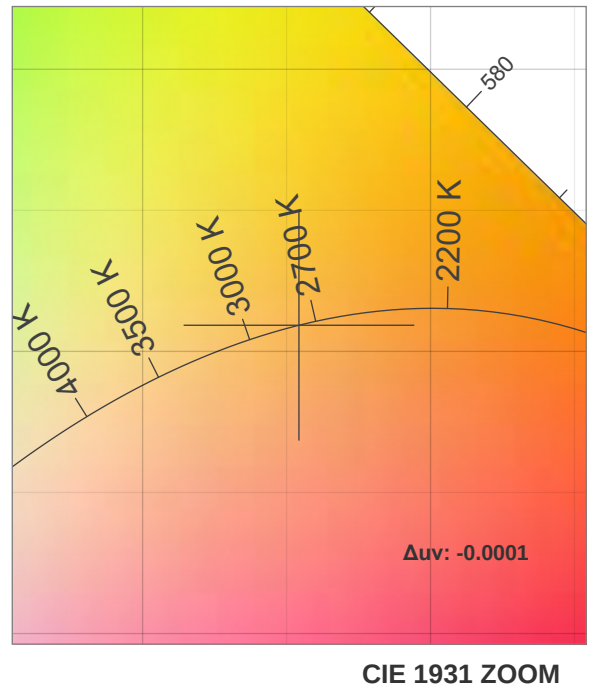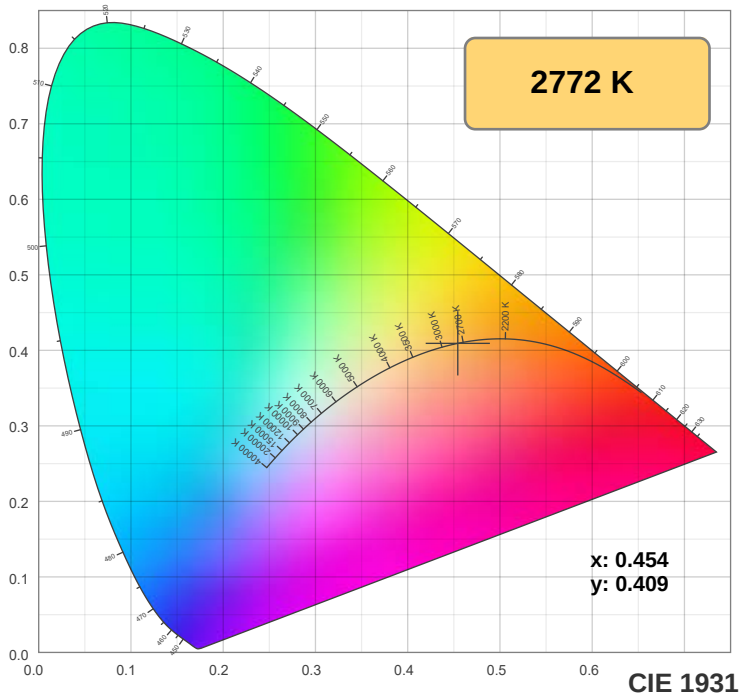

TM-30: 90.6

CRI: 92.2 (R1-R8)

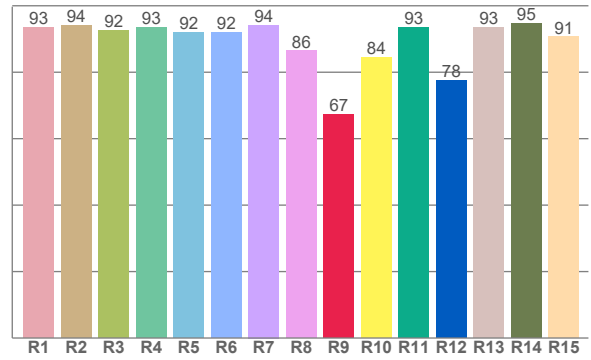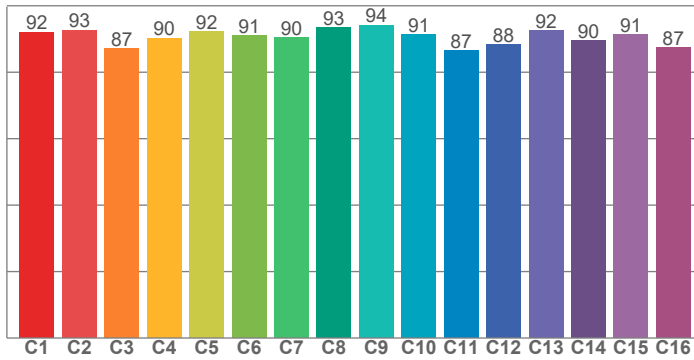

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.4	94.2	92.4	93.4	91.9	91.9	94.2	86.4	67.2	84.3	93.4	77.6	93.4	94.6	90.6


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.1	92.7	87.1	90.3	92.1	91.0	90.4	93.5	94.2	91.4	86.6	88.2	92.4	89.5	91.3	87.5

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88.5	96.7	85.4	86.8	89.4	87.1	86.0	90.9	95.5	90.8	91.4	92.3	93.1	88.6	88.2

CQS: 89.4

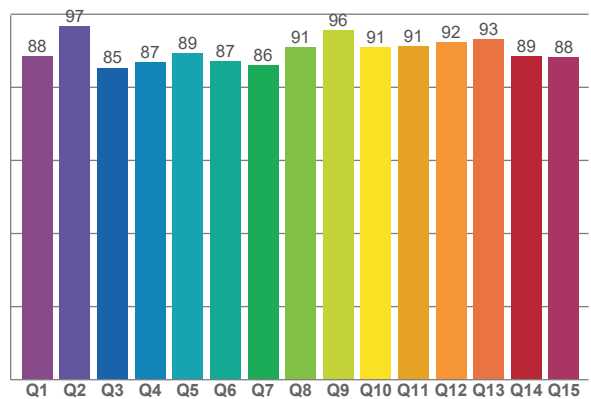

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2772 K	92.2	67.2	90.6	102.0	89.4	0.454	0.409	0.260	0.351	-0.0001

TM-30 Details







Rf 90.6

Fidelity index Rf


Rg 102.0

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	92	-4%	-2%
2	93	-3%	3%
3	87	-1%	7%
4	90	2%	6%
5	92	5%	5%
6	91	6%	-1%
7	90	2%	-6%
8	93	0%	-4%
9	94	-3%	-2%
10	91	-4%	4%
11	87	-1%	10%
12	88	4%	5%
13	92	5%	-1%
14	90	6%	-5%
15	91	2%	-5%
16	87	0%	-10%

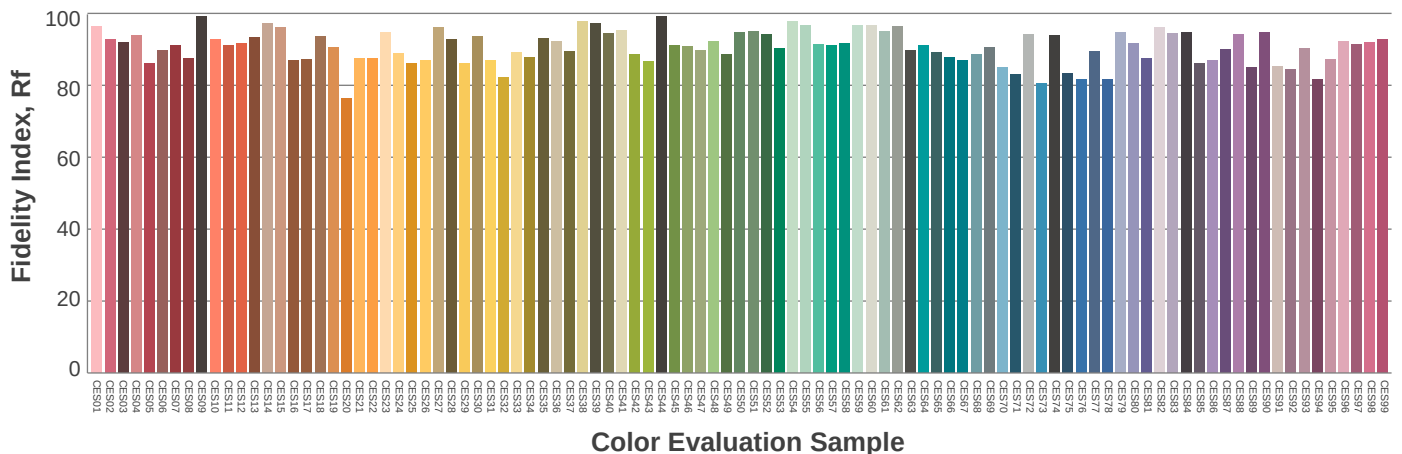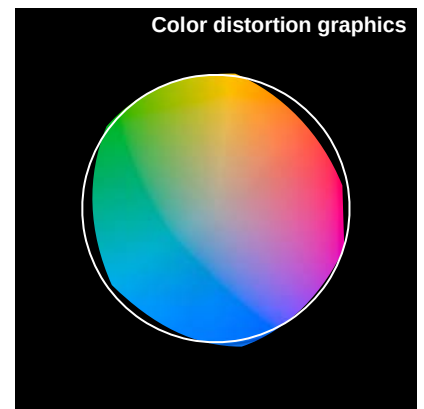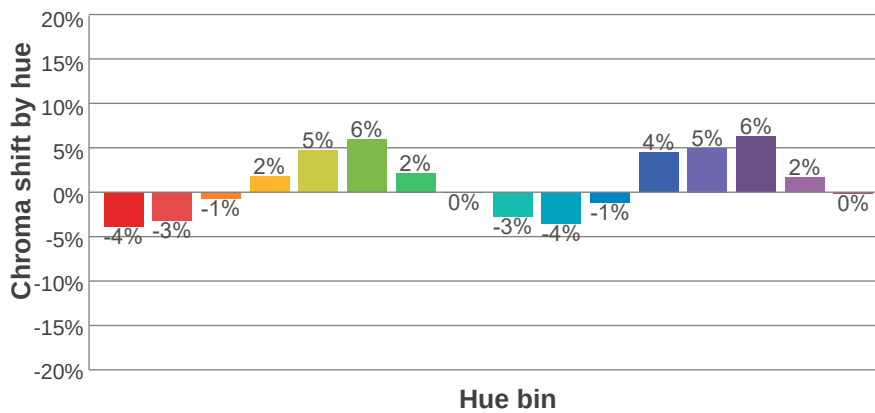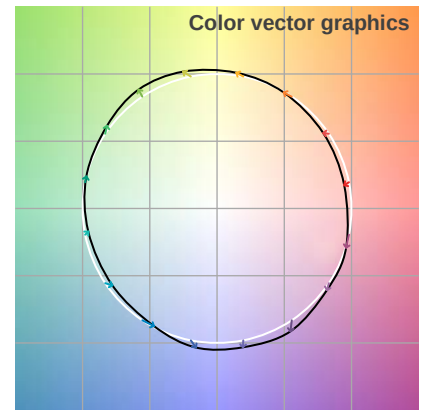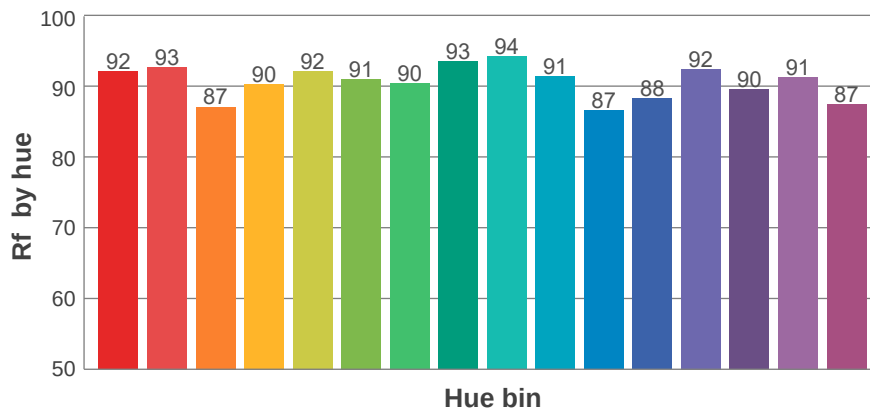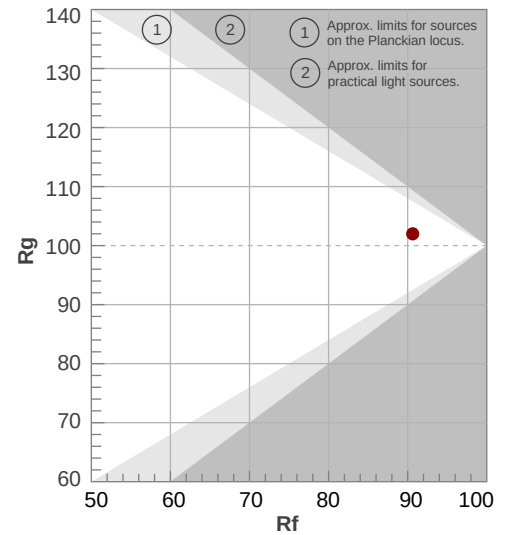

Beam Details

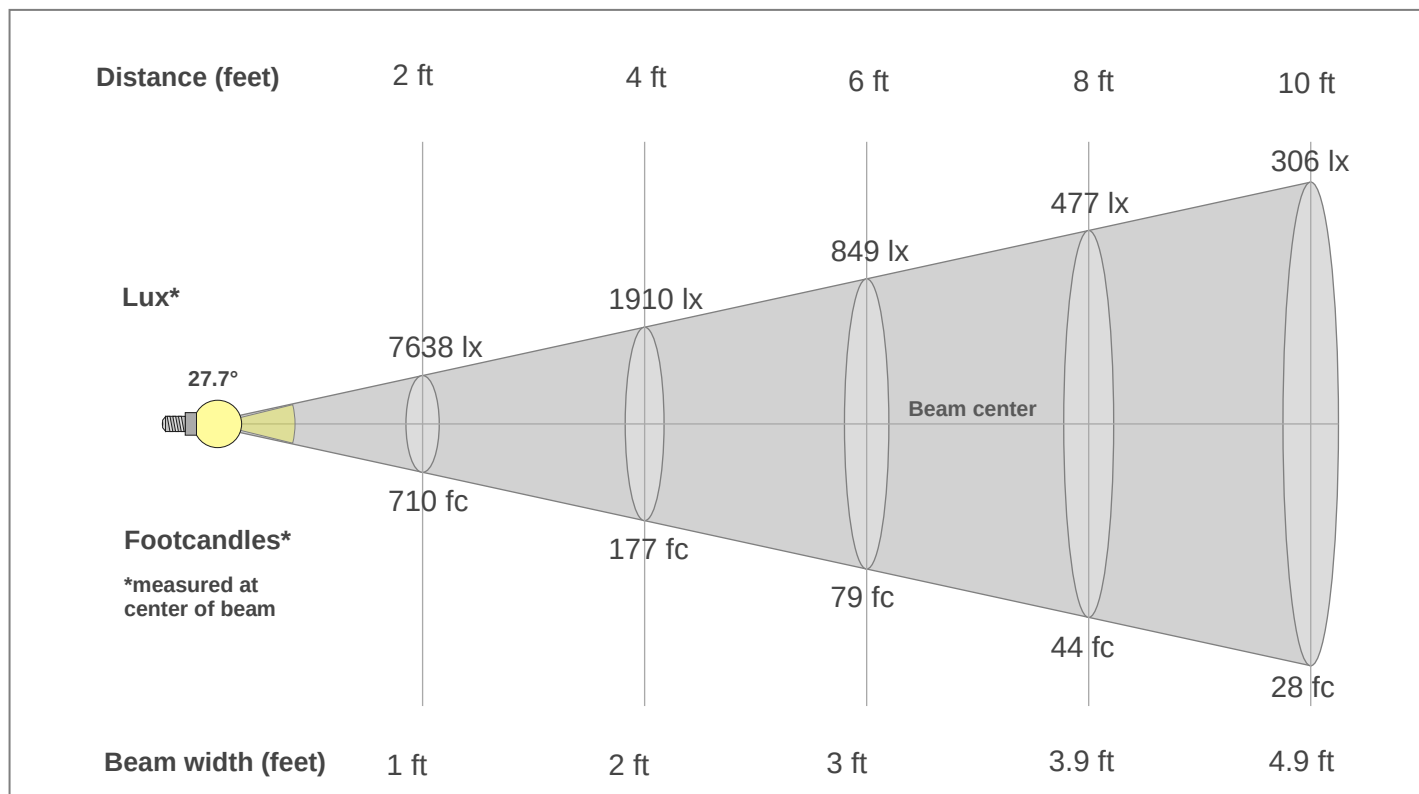

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2839lx	710lx	315lx	177lx	114lx	79lx	58lx	44lx	35lx	28lx	23lx	20lx	17lx	14lx	13lx	11lx	10lx	9lx	8lx	7lx
263.7fc	65.9fc	29.3fc	16.5fc	10.5fc	7.3fc	5.4fc	4.1fc	3.3fc	2.6fc	2.2fc	1.8fc	1.6fc	1.3fc	1.2fc	1fc	0.9fc	0.8fc	0.7fc	0.7fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2839	2802	2691	2520	2298	2029	1721	1392	1073	795	577	422	317	246	196	157	126	101	81	66
100%	99%	95%	89%	81%	71%	61%	49%	38%	28%	20%	15%	11%	9%	7%	6%	4%	4%	3%	2%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2839	2802	2691	2520	2298	2029	1721	1392	1073	795	577	422	317	246	196	157	126	101	81	66
100%	99%	95%	89%	81%	71%	61%	49%	38%	28%	20%	15%	11%	9%	7%	6%	4%	4%	3%	2%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2839	2802	2691	2520	2298	2029	1721	1392	1073	795	577	422	317	246	196	157	126	101	81	66
100%	99%	95%	89%	81%	71%	61%	49%	38%	28%	20%	15%	11%	9%	7%	6%	4%	4%	3%	2%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2839	2802	2691	2520	2298	2029	1721	1392	1073	795	577	422	317	246	196	157	126	101	81	66
100%	99%	95%	89%	81%	71%	61%	49%	38%	28%	20%	15%	11%	9%	7%	6%	4%	4%	3%	2%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
27.7°	49.7°	74.5°	99.1%	97.8%