

Photometric / Colorimetric / Electric Report

Fixture Model:
202-S-BV-WD-6-60-NSP-PR1-2-FLS-2-BV
Trim Model:

Date:
8/6/2026



Light efficiency:
71 Lumen/Watt


Light quality:
CRI: 92.3

Color temperature:
2775 K



CIE 1931:
x: 0.453
y: 0.408

Output:	952 lm
Peak:	1086 cd
Power:	13.5 W
PF:	0.99


Spectra:

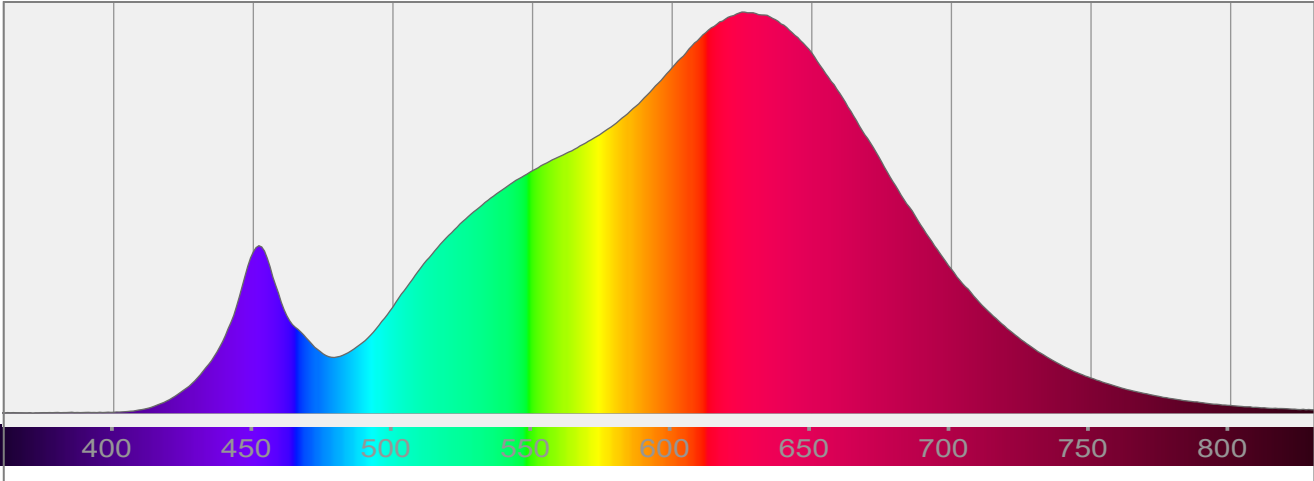


Color Details

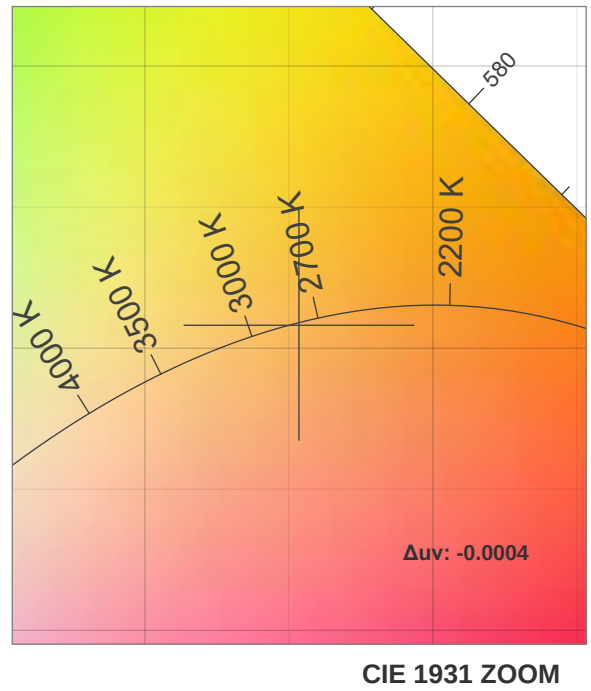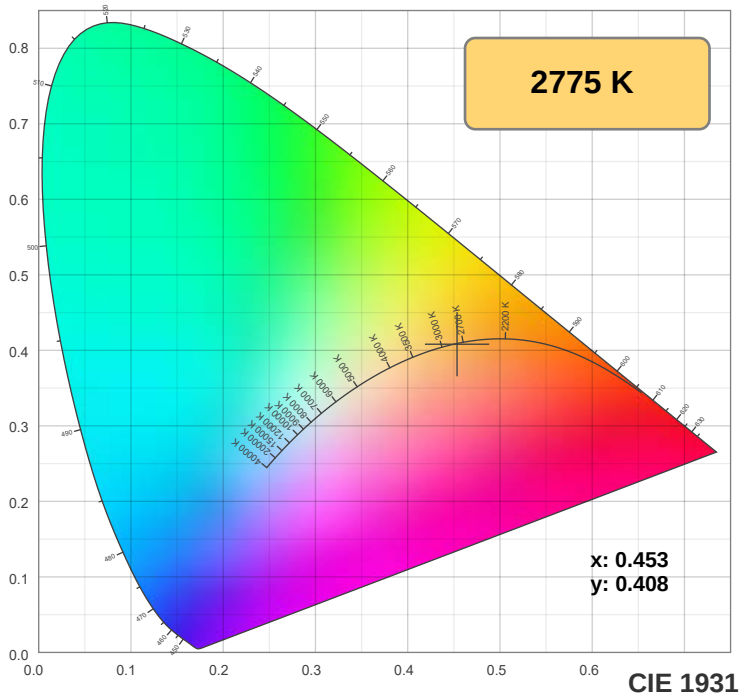

TM-30: 90.6

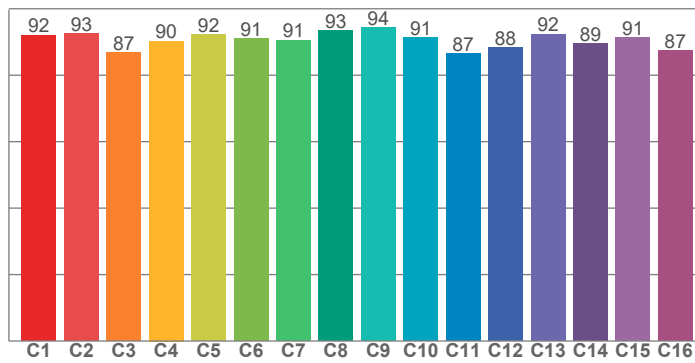

CRI: 92.3 (R1-R8)

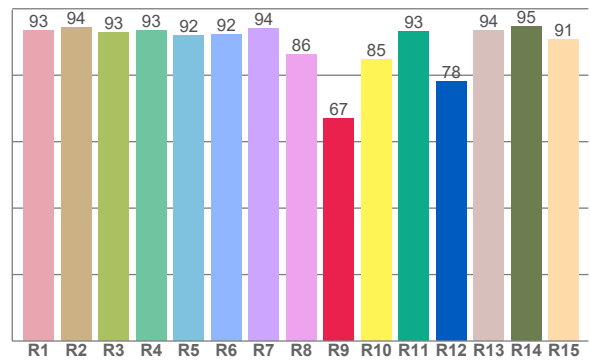

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.5	94.4	92.7	93.4	92.0	92.2	94.1	86.2	67.1	84.8	93.3	78.1	93.6	94.8	90.7


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.1	92.6	86.9	90.3	92.2	91.0	90.6	93.5	94.3	91.3	86.6	88.2	92.4	89.4	91.3	87.4

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88.5	96.7	85.2	86.7	89.4	87.3	85.8	90.6	95.6	90.8	91.1	92.1	92.9	88.6	88.2

CQS: 89.3

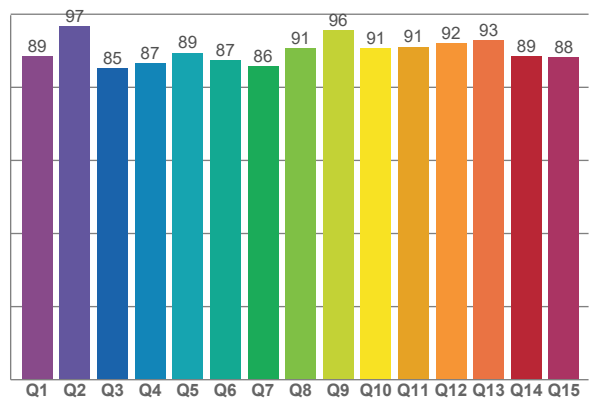

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2775 K	92.3	67.1	90.6	102.0	89.3	0.453	0.408	0.259	0.350	-0.0004

TM-30 Details







Rf 90.6

Fidelity index Rf


Rg 102.0

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	92	-4%	-1%
2	93	-3%	3%
3	87	-1%	7%
4	90	2%	6%
5	92	5%	5%
6	91	6%	-1%
7	91	2%	-6%
8	93	0%	-4%
9	94	-3%	-2%
10	91	-3%	4%
11	87	-1%	10%
12	88	5%	5%
13	92	5%	-1%
14	89	6%	-5%
15	91	2%	-5%
16	87	0%	-10%

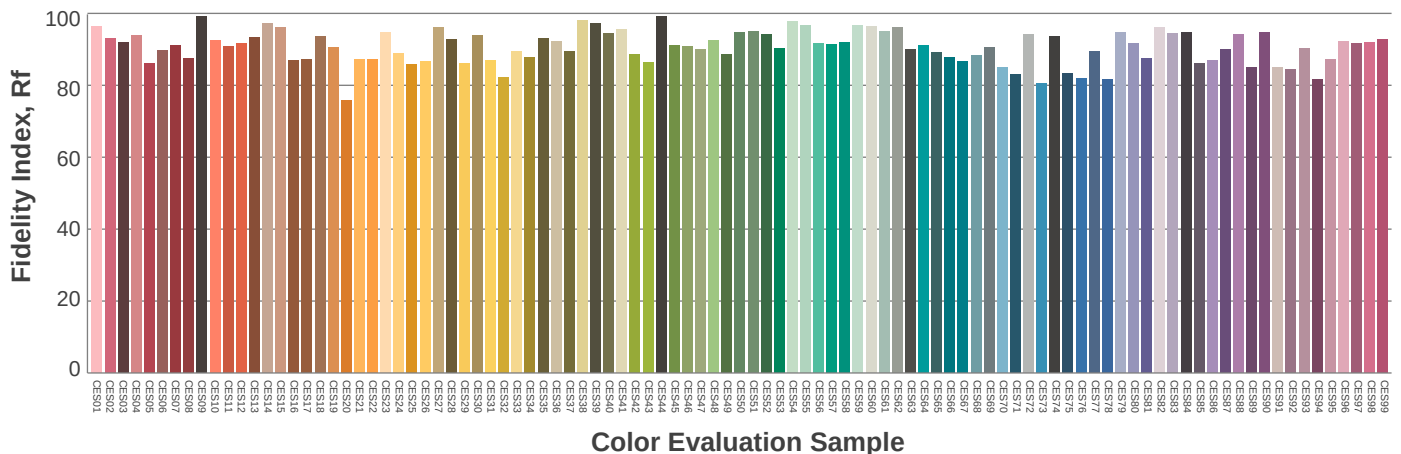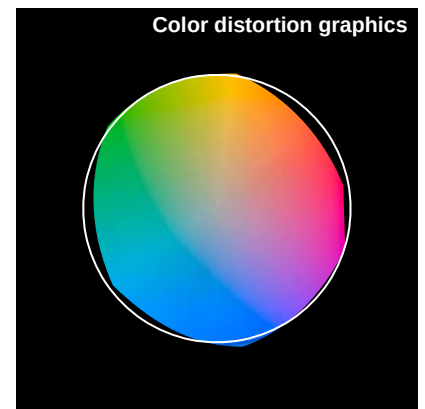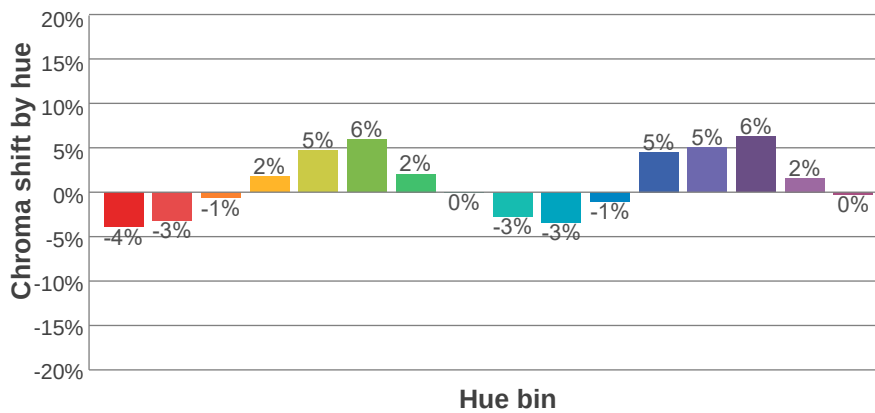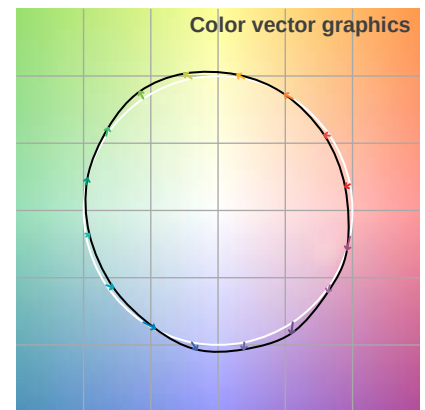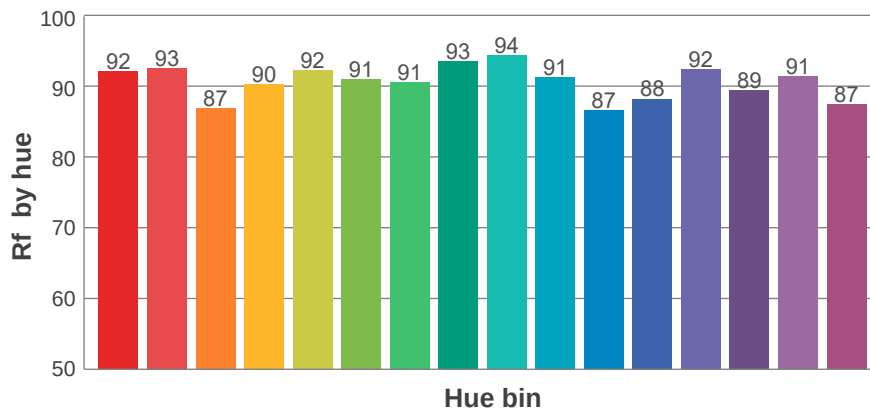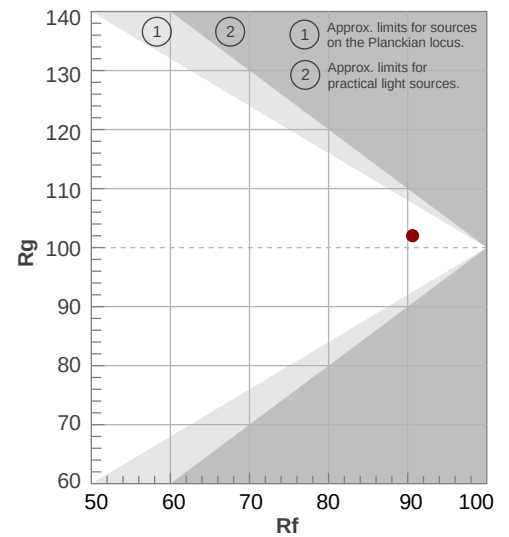

Beam Details

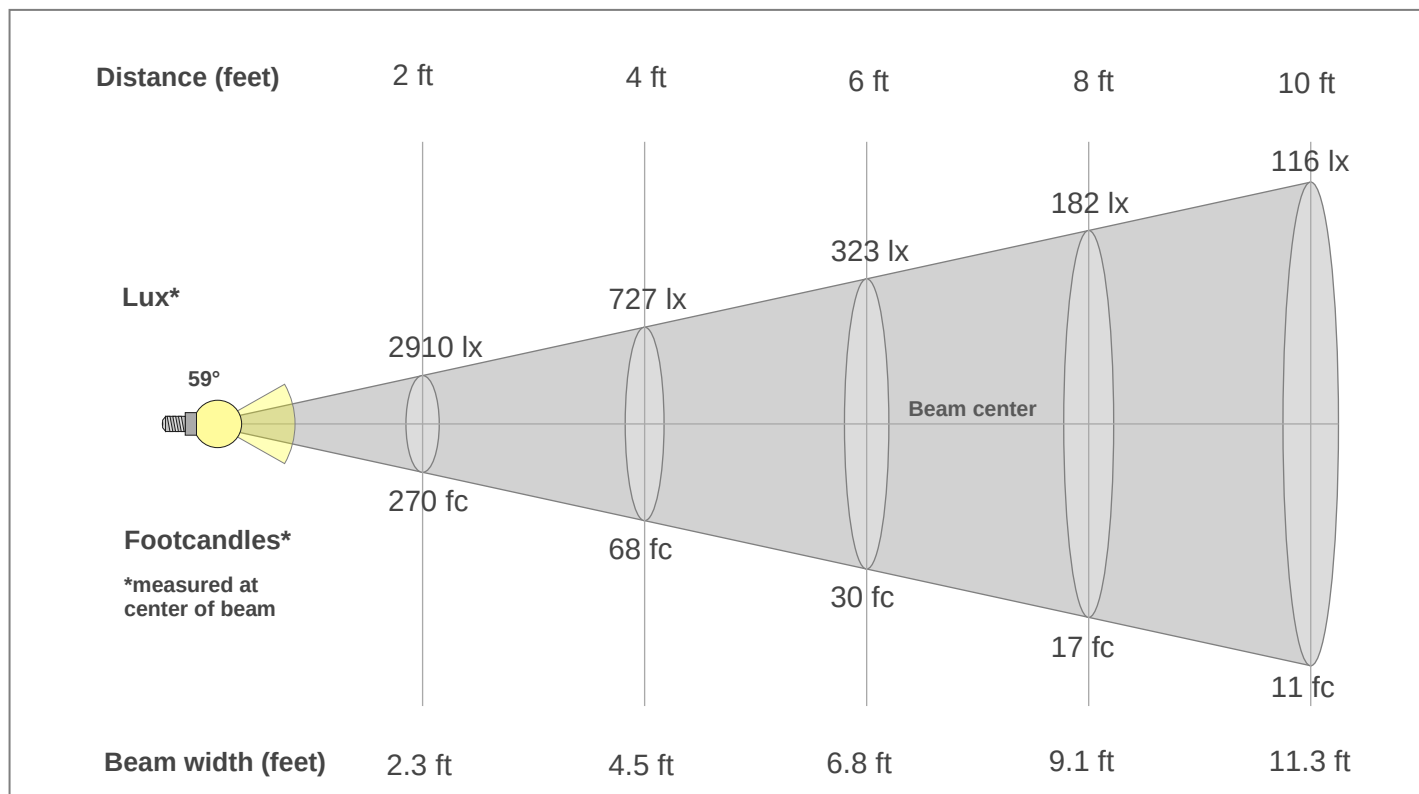

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1081lx	270lx	120lx	68lx	43lx	30lx	22lx	17lx	13lx	11lx	9lx	8lx	6lx	6lx	5lx	4lx	4lx	3lx	3lx	3lx
100.5fc	25.1fc	11.2fc	6.3fc	4fc	2.8fc	2.1fc	1.6fc	1.2fc	1fc	0.8fc	0.7fc	0.6fc	0.5fc	0.4fc	0.4fc	0.3fc	0.3fc	0.3fc	0.3fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1081	1081	1083	1085	1086	1082	1072	1055	1029	993	946	886	811	724	625	514	395	289	209	152
100%	100%	100%	100%	100%	100%	99%	98%	95%	92%	88%	82%	75%	67%	58%	48%	37%	27%	19%	14%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1081	1081	1083	1085	1086	1082	1072	1055	1029	993	946	886	811	724	625	514	395	289	209	152
100%	100%	100%	100%	100%	100%	99%	98%	95%	92%	88%	82%	75%	67%	58%	48%	37%	27%	19%	14%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1081	1081	1083	1085	1086	1082	1072	1055	1029	993	946	886	811	724	625	514	395	289	209	152
100%	100%	100%	100%	100%	100%	99%	98%	95%	92%	88%	82%	75%	67%	58%	48%	37%	27%	19%	14%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1081	1081	1083	1085	1086	1082	1072	1055	1029	993	946	886	811	724	625	514	395	289	209	152
100%	100%	100%	100%	100%	100%	99%	98%	95%	92%	88%	82%	75%	67%	58%	48%	37%	27%	19%	14%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
59°	80°	92.9°	99.0%	97.4%