

Photometric / Colorimetric / Electric Report

Fixture Model:

202-S-BV-WD-7-25-NSP-PR1-2-FLS-2-BV

Trim Model:

Date:

8/11/2026



Light efficiency:

62 Lumen/Watt

Light quality:

CRI: 92.0

Color temperature:

2954 K

CIE 1931:

x: 0.437
y: 0.398


Output: 836 lm

Peak: 2917 cd



Power: 13.5 W

PF: 0.99

Spectra:


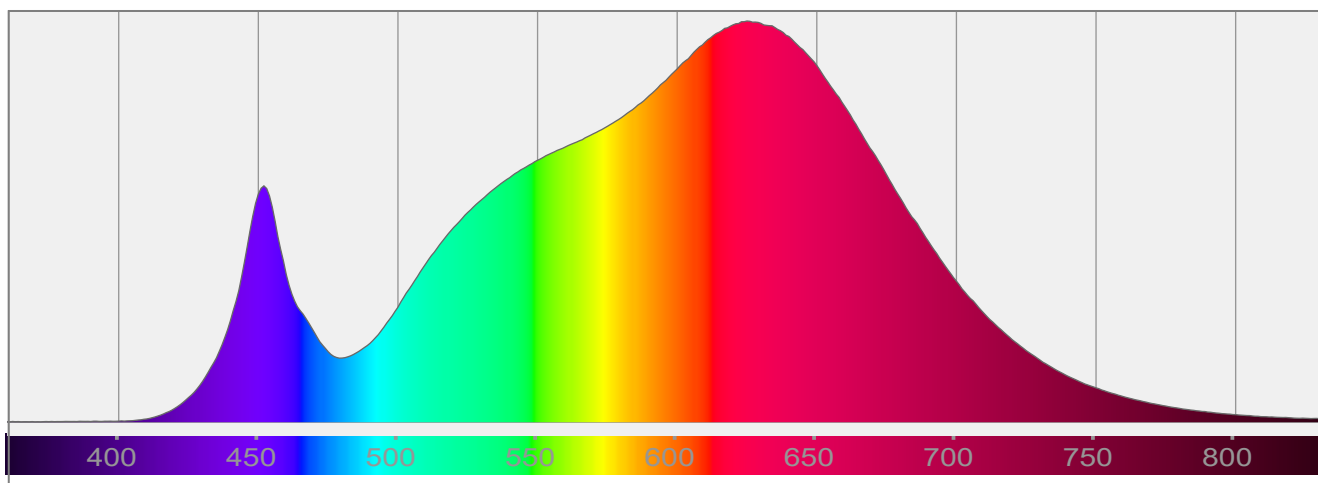


Color Details

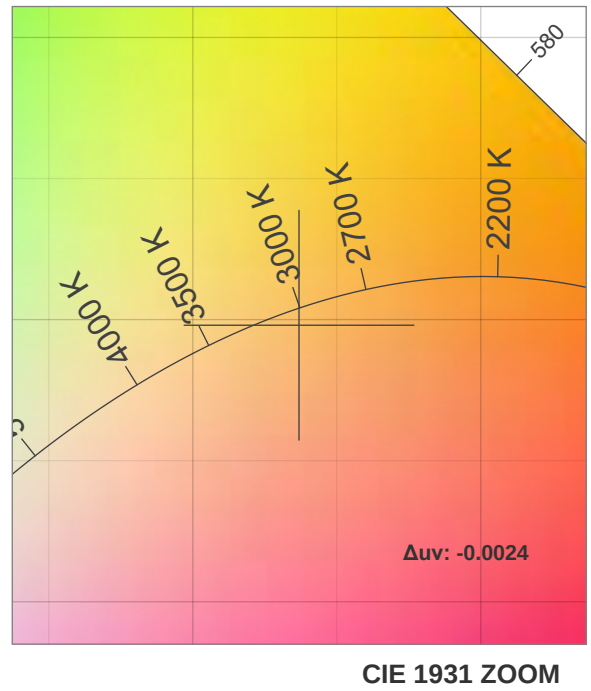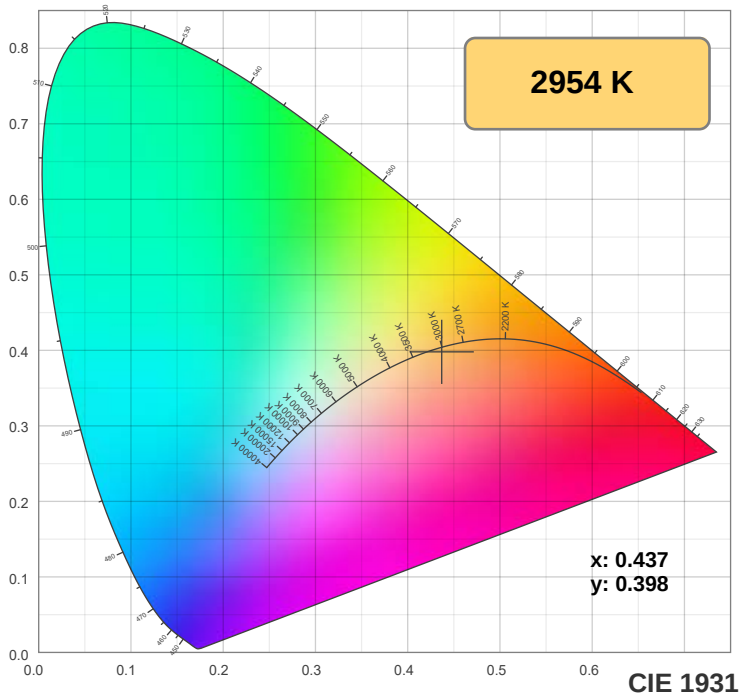

TM-30: 89.4

CRI: 92.0 (R1-R8)

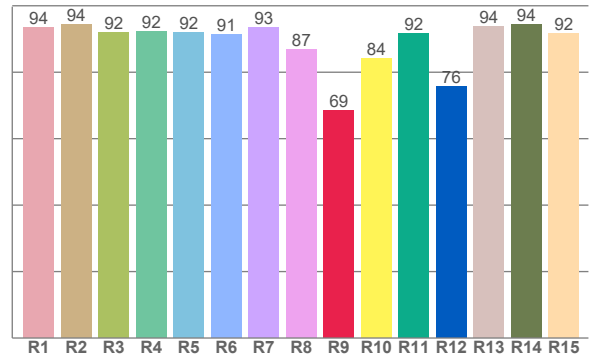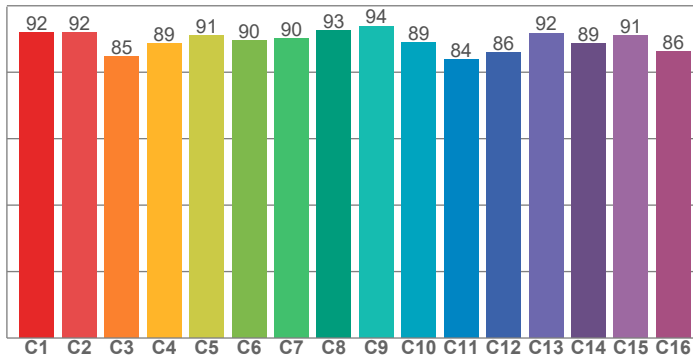

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.6	94.3	92.1	92.4	91.9	91.4	93.5	86.8	68.5	84.2	91.8	75.8	93.6	94.5	91.7


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92.0	92.0	84.7	88.6	91.0	89.5	90.0	92.6	93.9	88.8	83.7	85.9	91.8	88.6	91.1	86.1

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89.2	97.2	82.2	83.9	88.6	86.8	84.0	89.7	95.3	89.2	89.0	90.1	91.9	89.2	88.9

CQS: 88.3

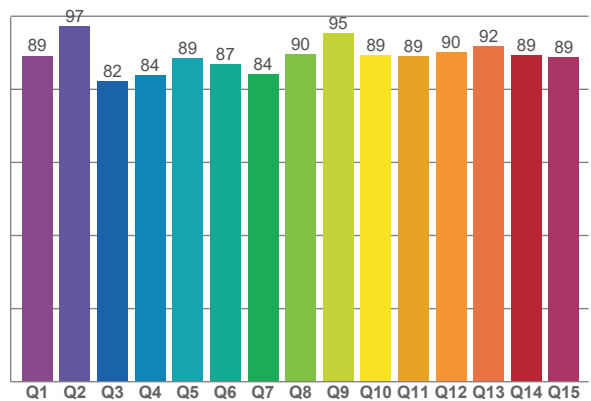

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2954 K	92.0	68.5	89.4	102.8	88.3	0.437	0.398	0.253	0.346	-0.0024

TM-30 Details







Rf 89.4

Fidelity index Rf


Rg 102.8

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	92	-4%	-1%
2	92	-3%	3%
3	85	0%	8%
4	89	2%	6%
5	91	6%	5%
6	90	7%	-1%
7	90	2%	-6%
8	93	0%	-5%
9	94	-3%	-1%
10	89	-4%	6%
11	84	-1%	12%
12	86	5%	7%
13	92	6%	0%
14	89	8%	-5%
15	91	2%	-5%
16	86	1%	-11%

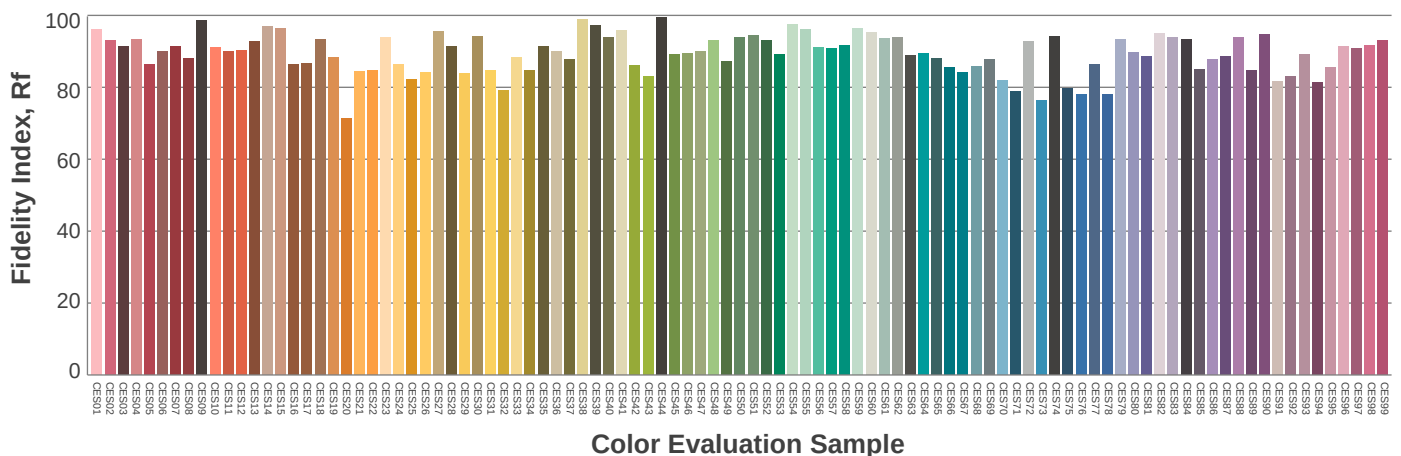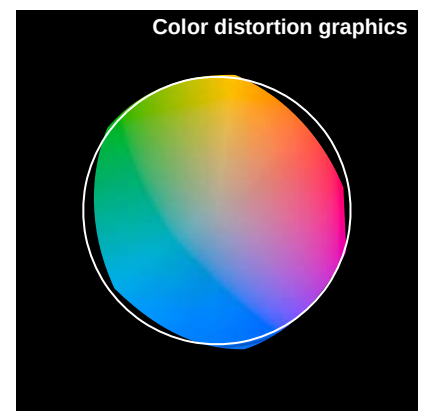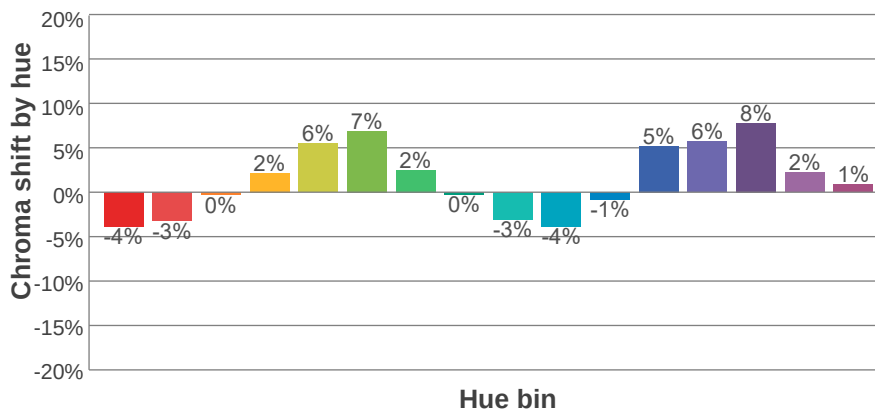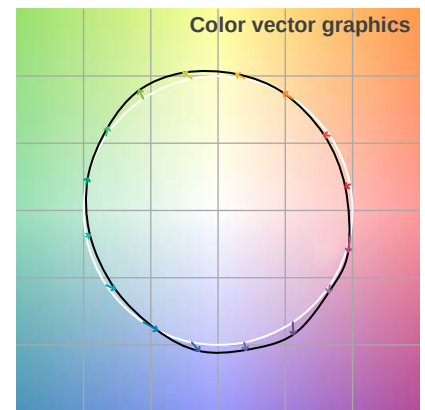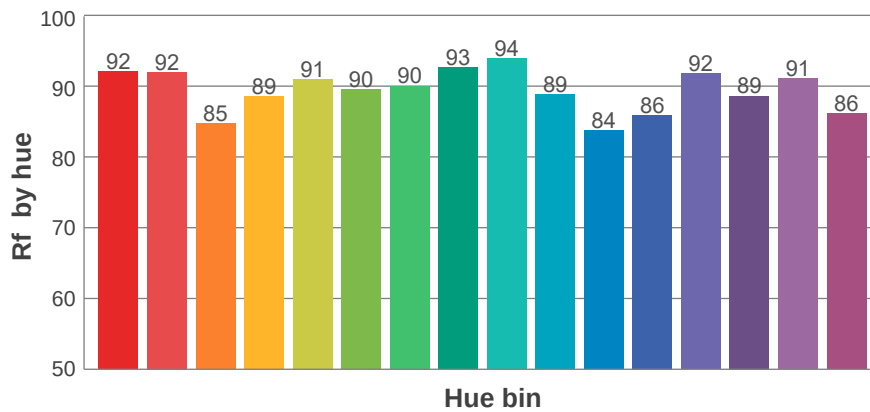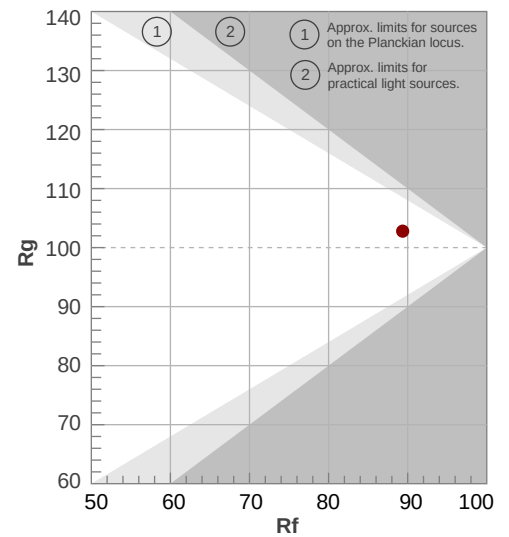

Beam Details

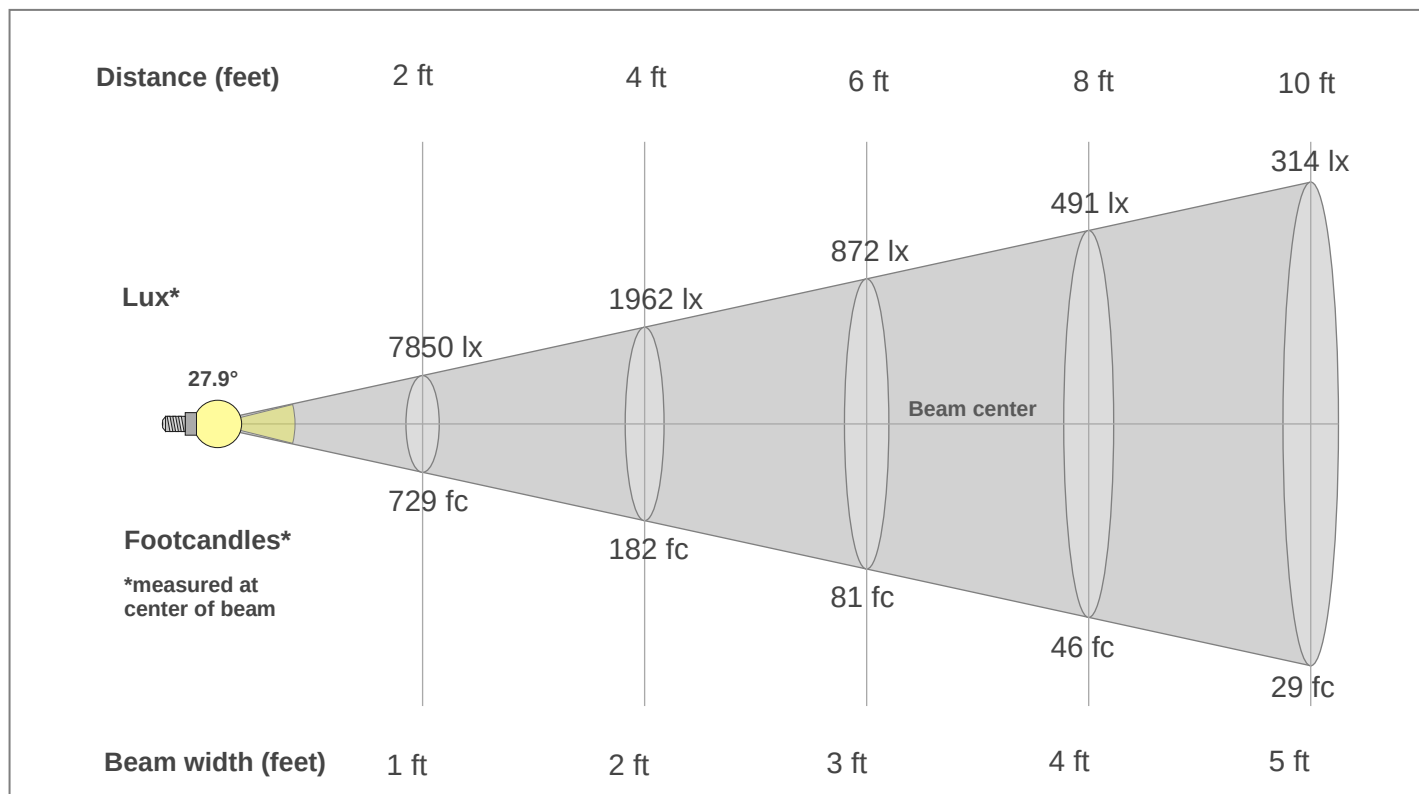

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2917lx	729lx	324lx	182lx	117lx	81lx	60lx	46lx	36lx	29lx	24lx	20lx	17lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx
271fc	67.8fc	30.1fc	16.9fc	10.8fc	7.5fc	5.5fc	4.2fc	3.3fc	2.7fc	2.2fc	1.9fc	1.6fc	1.4fc	1.2fc	1.1fc	0.9fc	0.8fc	0.8fc	0.7fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2917	2876	2761	2585	2360	2090	1782	1453	1129	845	619	456	346	270	216	175	141	114	91	74
100%	99%	95%	89%	81%	72%	61%	50%	39%	29%	21%	16%	12%	9%	7%	6%	5%	4%	3%	3%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2917	2876	2761	2585	2360	2090	1782	1453	1129	845	619	456	346	270	216	175	141	114	91	74
100%	99%	95%	89%	81%	72%	61%	50%	39%	29%	21%	16%	12%	9%	7%	6%	5%	4%	3%	3%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2917	2876	2761	2585	2360	2090	1782	1453	1129	845	619	456	346	270	216	175	141	114	91	74
100%	99%	95%	89%	81%	72%	61%	50%	39%	29%	21%	16%	12%	9%	7%	6%	5%	4%	3%	3%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2917	2876	2761	2585	2360	2090	1782	1453	1129	845	619	456	346	270	216	175	141	114	91	74
100%	99%	95%	89%	81%	72%	61%	50%	39%	29%	21%	16%	12%	9%	7%	6%	5%	4%	3%	3%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
27.9°	50.7°	76.4°	99.0%	97.6%