

Photometric / Colorimetric / Electric Report

Fixture Model:
202-S-WD-5-15-NSP-PR1-2-FLS-2
Trim Model:

Date:
8/5/2026



Light efficiency:
54 Lumen/Watt


Light quality:
CRI: 94.6

Color temperature:
3010 K



CIE 1931:
x: 0.432
y: 0.395

Output:	730 lm
Peak:	4916 cd
Power:	13.5 W
PF:	0.99


Spectra:

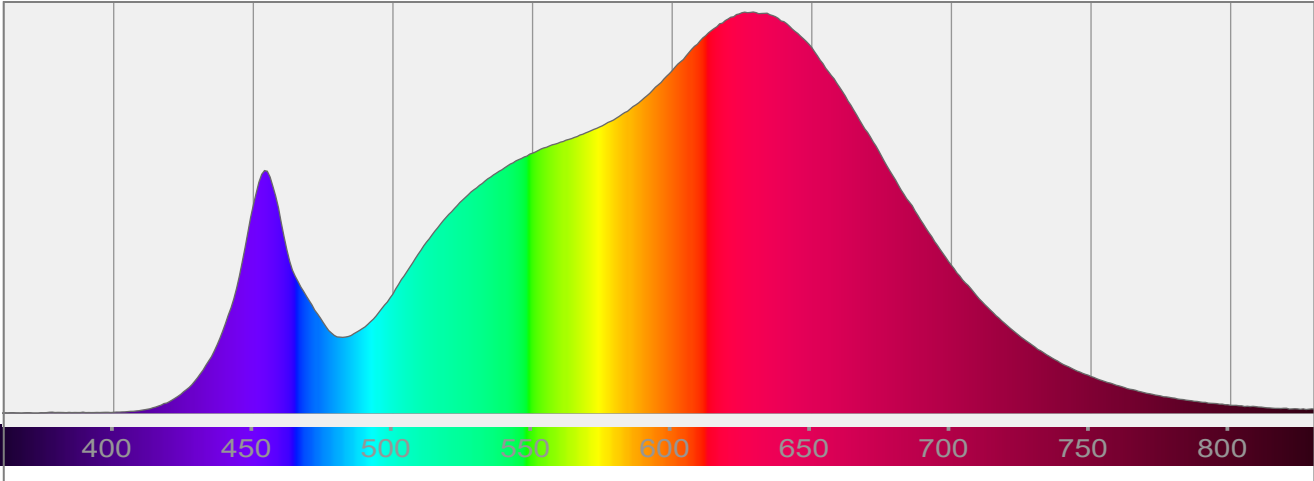


Color Details

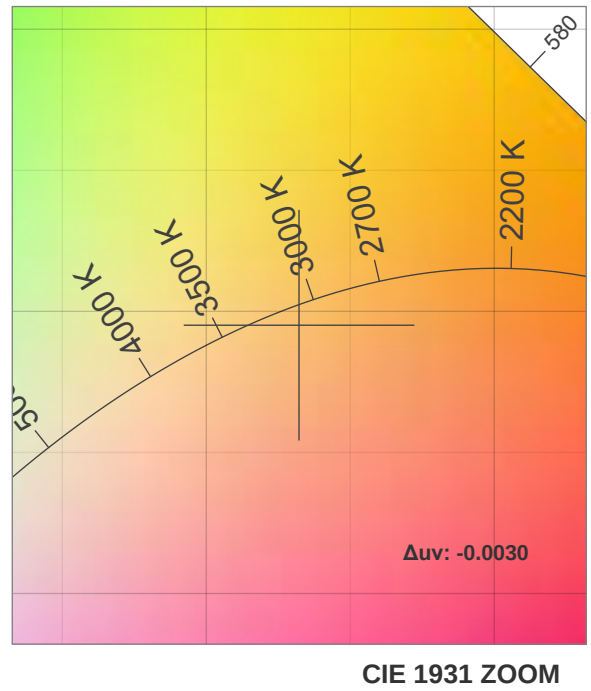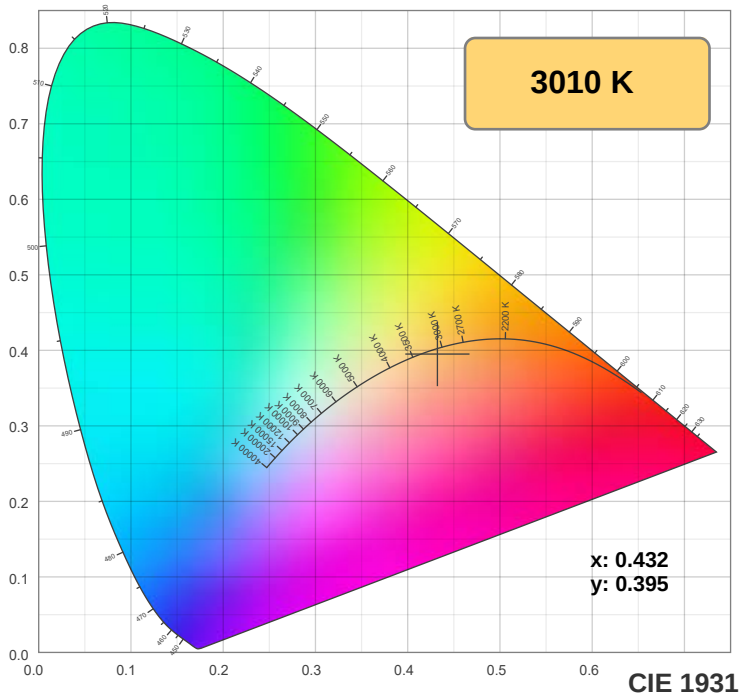

TM-30: 91.3

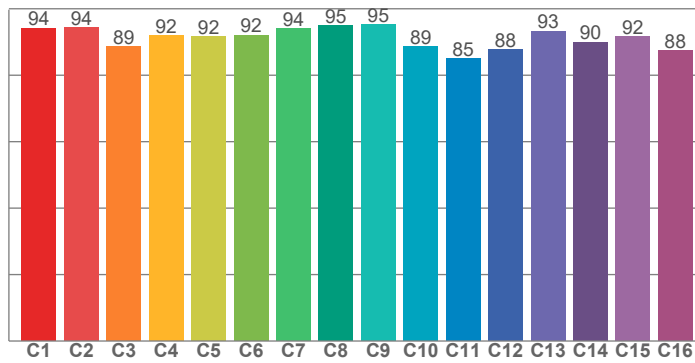

CRI: 94.6 (R1-R8)

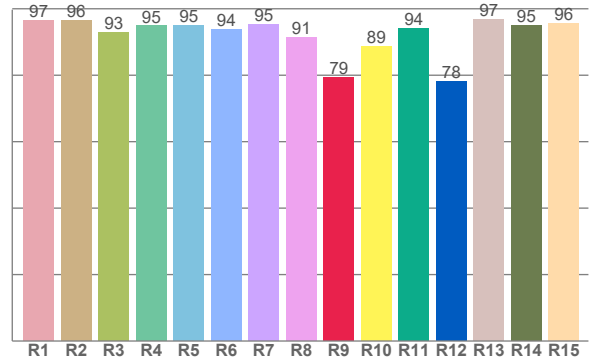

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96.6	96.4	93.0	94.8	95.0	93.9	95.4	91.4	79.3	88.7	94.0	78.1	96.7	94.9	95.6


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.2	94.4	88.5	91.9	91.7	92.1	94.0	95.1	95.2	88.7	85.1	87.6	93.3	90.0	91.7	87.5

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.8	97.5	83.9	85.2	90.7	90.3	86.6	91.4	95.4	90.9	90.8	92.1	93.8	92.5	92.4

CQS: 90.3

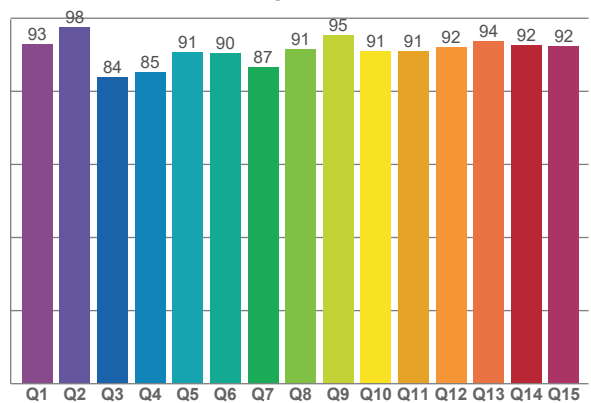

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3010 K	94.6	79.3	91.3	102.7	90.3	0.432	0.395	0.251	0.345	-0.0030

TM-30 Details







Rf 91.3

Fidelity index R_f


Rg 102.7

Gamut index Rg

		Shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	94	-3%	-1%
2	94	-2%	2%
3	89	0%	6%
4	92	1%	5%
5	92	2%	4%
6	92	5%	0%
7	94	1%	-3%
8	95	0%	-3%
9	95	-2%	1%
10	89	-2%	7%
11	85	1%	11%
12	88	5%	5%
13	93	5%	0%
14	90	7%	-4%
15	92	2%	-5%
16	88	2%	-10%

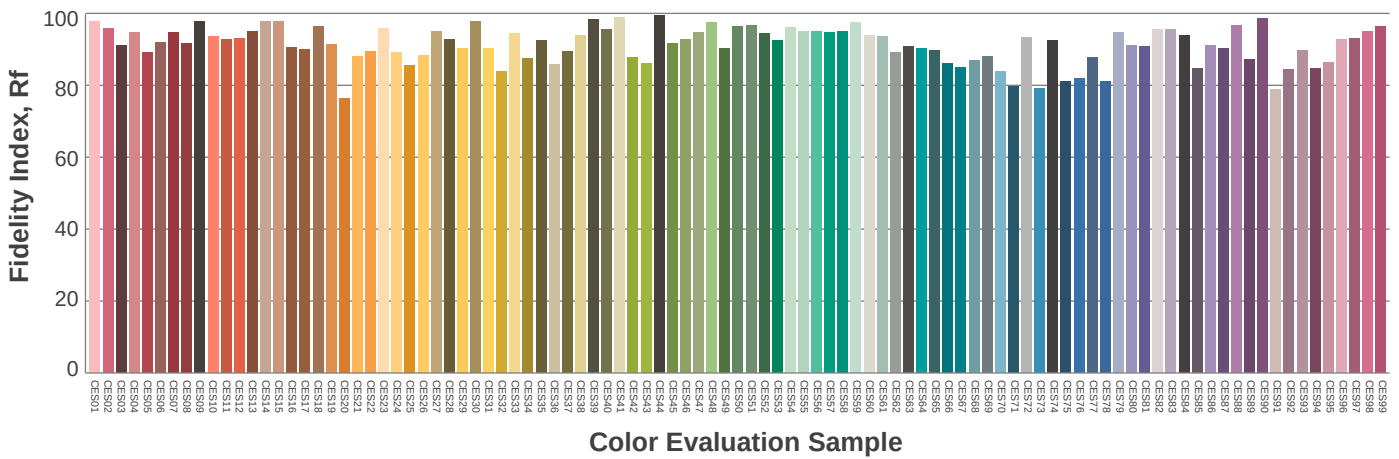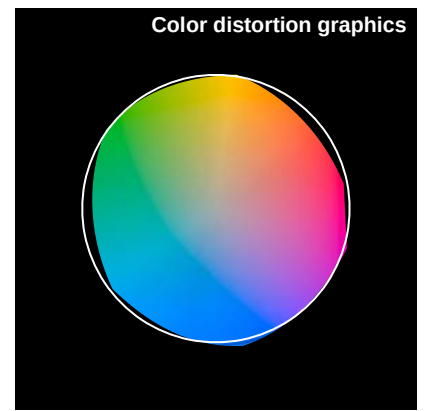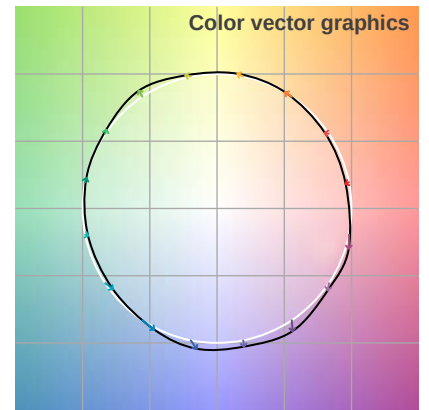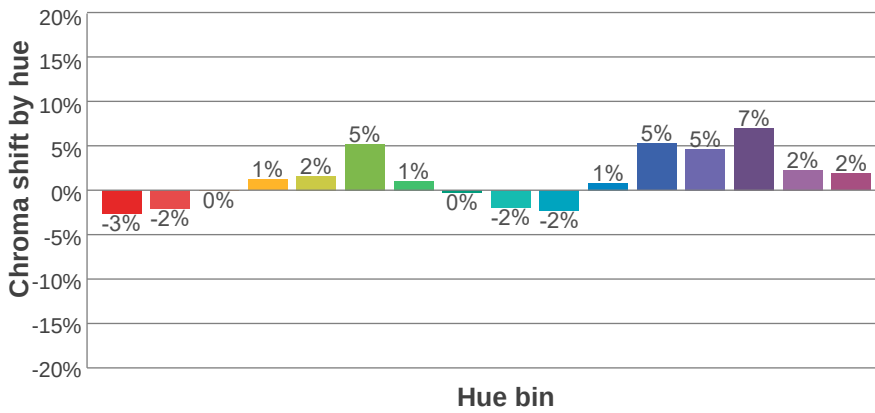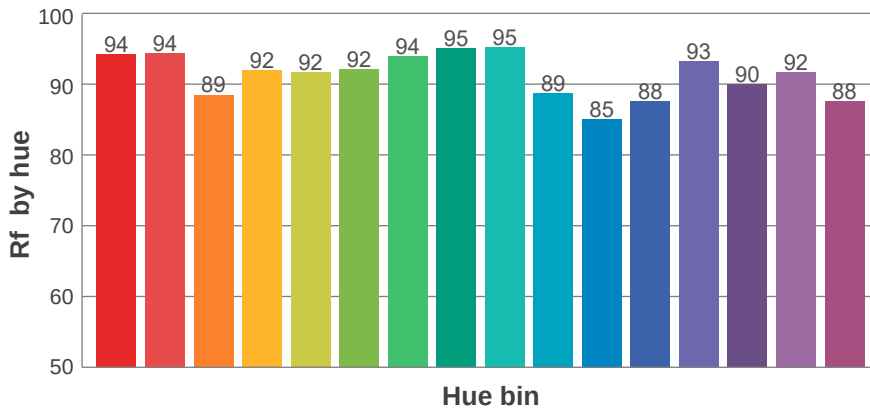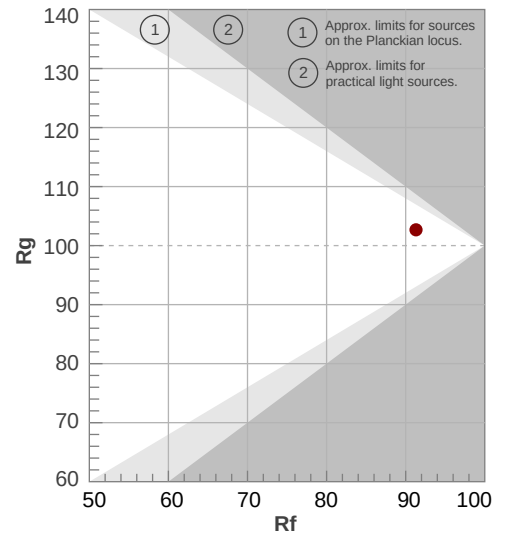

Beam Details

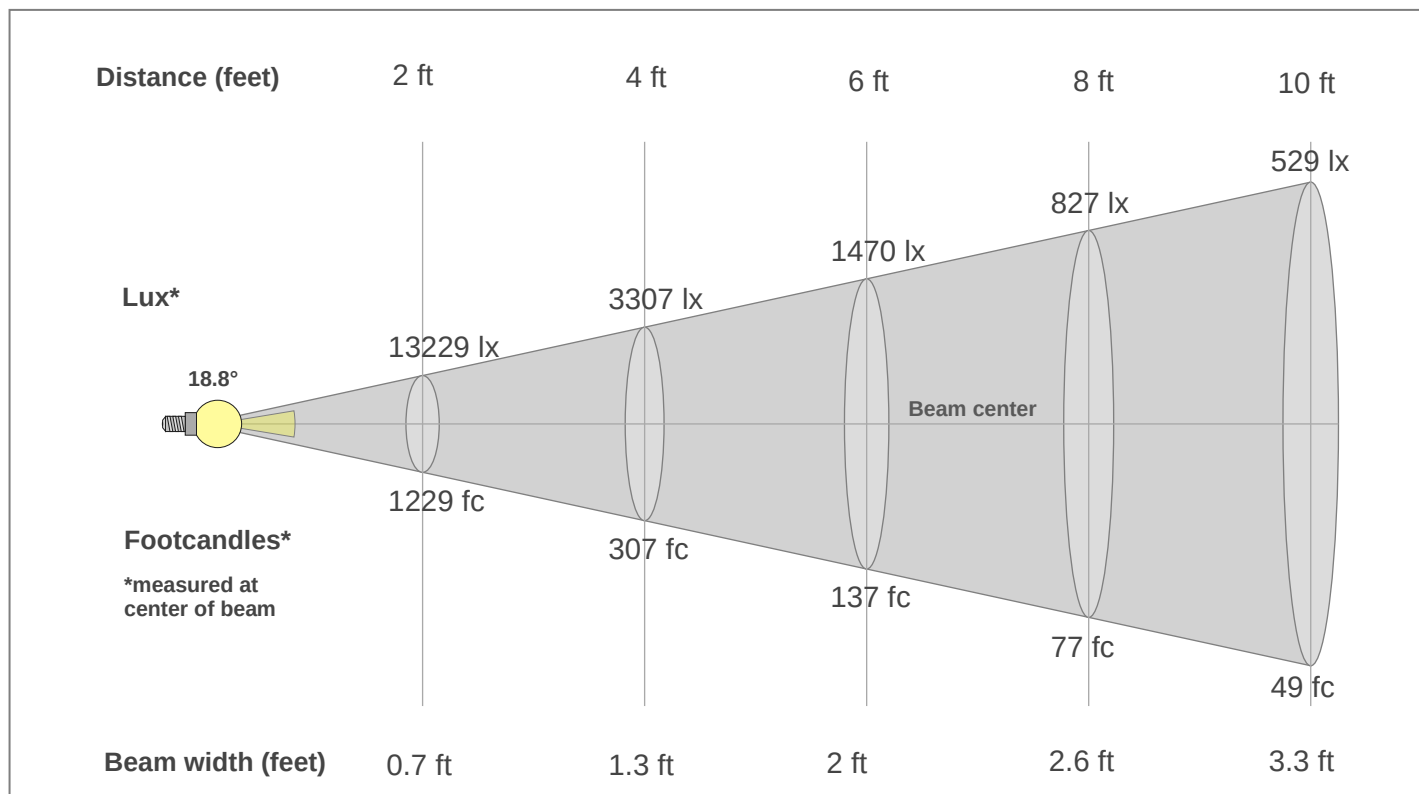

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
4916lx	1229lx	546lx	307lx	197lx	137lx	100lx	77lx	61lx	49lx	41lx	34lx	29lx	25lx	22lx	19lx	17lx	15lx	14lx	12lx
456.7fc	114.2fc	50.7fc	28.5fc	18.3fc	12.7fc	9.3fc	7.1fc	5.6fc	4.6fc	3.8fc	3.2fc	2.7fc	2.3fc	2fc	1.8fc	1.6fc	1.4fc	1.3fc	1.1fc

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
4916	4892	4771	4578	4322	4019	3681	3322	2954	2593	2245	1922	1631	1372	1146	952	786	648	535	444
100%	100%	97%	93%	88%	82%	75%	68%	60%	53%	46%	39%	33%	28%	23%	19%	16%	13%	11%	9%

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
4916	4892	4771	4578	4322	4019	3681	3322	2954	2593	2245	1922	1631	1372	1146	952	786	648	535	444
100%	100%	97%	93%	88%	82%	75%	68%	60%	53%	46%	39%	33%	28%	23%	19%	16%	13%	11%	9%

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
4916	4892	4771	4578	4322	4019	3681	3322	2954	2593	2245	1922	1631	1372	1146	952	786	648	535	444
100%	100%	97%	93%	88%	82%	75%	68%	60%	53%	46%	39%	33%	28%	23%	19%	16%	13%	11%	9%

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
4916	4892	4771	4578	4322	4019	3681	3322	2954	2593	2245	1922	1631	1372	1146	952	786	648	535	444
100%	100%	97%	93%	88%	82%	75%	68%	60%	53%	46%	39%	33%	28%	23%	19%	16%	13%	11%	9%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
18.8°	36.9°	54.6°	99.5%	98.9%