

203-R NEW CONSTRUCTION WALL WASH LED
FLR-2-WW WALL WASH TRIM
NON-IC/IC-CP RATED HOUSINGS

Project Name	
Date	Type
Prepared By	
Comments	
Catalog # 203-R - - / / FLR-2-WW - - / -	



526 Portal Street
Cotati, CA 94931
USA
P 707.794.0888
www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.


© 2026 No. 8 Lighting
Doc # 91405-13.6



PRODUCT FEATURES



203-R
ROUND WALL WASH LIGHT ENGINE

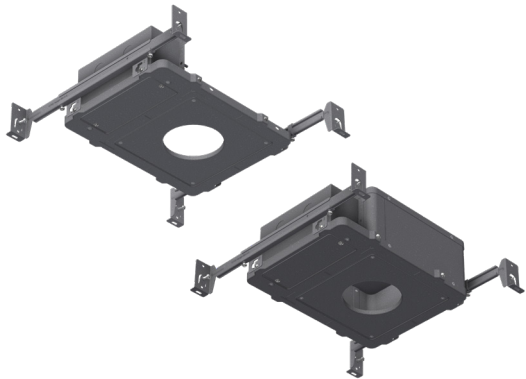

200 SERIES HOUSINGS
TYPE NON-IC or IC-CP RATED for ROUND TRIMS



200 SERIES TRIMS
FLANGED or FLANGELESS

203-R SPECIFICATION SUMMARY

	Static White				Warm Dimming		
LED Option	HI-27	HI-30	HI-35	HI-40	WD-5	WD-6	WD-7
Delivered Lumens	988	1027	1051	1075	878	856	916
System Wattage	13.5	13.5	13.5	13.5	13.5	13.5	13.5
Efficacy	74	77	79	81	66	64	67
CRI	93+	93+	93+	93+	92+	92+	92+
R9	66	68	70	73	79	67	69
CCT	2700K	3000K	3500K	4000K	3000-1800K	2800-2200K	3000-2200K
Color Consistency	2-Step				3-Step		
Optic Options	40, 60						
Optical Accessories	N/A						
Adjustability	Fixed Position (20° Wall Wash)						
Driver Options	<1/5% Forward/Reverse Phase (120v), 0.1/1/5% 0-10v (120-277v), 0.1/1% DALI (120-277v), 0.1/1% EcoSystem (120 or 277v)						
Trim	Round Wall Wash						
Finish Options	White, Oil-Rubbed Bronze, Satin Aluminum, Satin Aluminum w/ White Flange						
Trim Mounting Options	Flanged, Flangeless Sheetrock, Flangeless Wood						
Trim Accessory	UL Wet Listed Wall Wash Lens						
Housing Options	New Construction: Type Non-IC Air-Tight, Type IC-CP Rated CCEA Approved Air-Tight						

Performance data shown with FLR-2-WW Trim and 60° optic.
Warm Dimming data shown for 3000K and 2800K.
See Performance Summaries for additional information.

PRODUCT SPECIFIER/PRODUCT ORDER NUMBER

203-R

LIGHT ENGINE

LED
OPTIONS

OPTIC OPTIONS

DRIVER OPTIONS



203-R

Wall Wash NEW CONSTRUCTION
AIRTIGHT Light Engine with fixed 20° tilt
for ROUND WALL WASH trim

HI-27

2700K 93+ CRI White

HI-30

3000K 93+ CRI White

HI-35

3500K 93+ CRI White

HI-40

4000K 93+ CRI White

WD-5

3000-1800K 92+ CRI Warm Dim

WD-6

2800-2200K 92+ CRI Warm Dim

WD-7

3000-2200K 92+ CRI Warm Dim

40

Flood

60

Wide Flood

PR1-2

Premium Forward or Reverse-Phase <1% Dimming

DIM3-2

Forward or Reverse-Phase 5% Dimming

DIM4-2

0-10v 5% Dimming

EL1-2

EldoLED 0-10v 1% Dimming

EL1-01-2

EldoLED 0-10v 0.1% Dimming

EL2-2

EldoLED DALI 1% Dimming

EL2-01-2

EldoLED 0.1% DALI Dimming

LU2-2

Lutron Hi-Lume LDE1 EcoSystem 1% Dimming

LU4-2

Lutron Hi-Lume PEQOE EcoSystem 0.1% Dimming

FLR-2-WW

TRIM

TRIM FINISH

TRIM MOUNTING ACCESSORIES
(Optional)

HOUSING OPTIONS

MOUNTING
OPTIONS



FLR-2-WW*

4 - 1/4" ROUND WALL WASH with
2 - 3/4" angle-cut aperture and wall
wash lens

*UL Wet listed.

WH
WHITE

OB*

OIL-RUBBED BRONZE

SA*†


SATIN ALUMINUM

SAWH*†

SATIN ALUMINUM with WHITE
flange

*Specialty finish.

†Not available with FLAT trim option.



FR-2*

ROUND FLANGELESS trim accessory for
flush mounting FLR-2/FLR-2-BV trims in
sheetrock ceiling applications

*For use with NIC-FR or IC-CP-FR housing
options only.

NIC-R

Type Non-IC for ROUND flanged trim
applications

NIC-FR*

Type Non-IC for ROUND flangeless trim in
sheetrock applications

NIC-FR-W

Type Non-IC for ROUND flangeless trim in
wood/stone applications

IC-CP-2-R

Type IC Chicago Plenum Rated for ROUND
flanged trim applications

IC-CP-2-FR*

Type IC Chicago Plenum Rated for ROUND
flangeless trim in sheetrock applications

IC-CP-2-FR-W

Type IC Chicago Plenum Rated for ROUND
flangeless trim in wood/stone applications

*Requires FR-2 flangeless trim accessory.

BH

Bar Hangers for joist
mounting

BB

Butterfly Brackets for c-
channel or bar mounting

TBC-BH

T-Bar Mounting Clips +
Bar Hangers for T-Bar
mounting

PMB

Panel Mounting
Brackets (set of two) for
direct mounting to wood
panels

Light Engine, LED, Optic Option, and Accessory Notes

203-R Wall wash NEW CONSTRUCTION light engine with fixed 20° tilt for ROUND WALL WASH trim. Light engine meets Washington State Airtight Standard WAC 51-11-0502 and in accordance with ASTM E283 to reduce energy loss. Use for wall wash lighting applications. To ensure fixture to fixture color consistency, use of the same LED option with adjacent fixtures is recommended. One field interchangeable optic option included standard.

Driver and Output Option Notes

0-10v driver options are configured for linear control. DALI driver options are configured for logarithmic control. No.8 Lighting conducts extensive testing to establish compatibility with many dimmer types. For a complete list of compatible dimmers, see 8lighting.com/resources-downloads. Outputs vary depending on LED type, trim type, and optical accessories used. For photometric files in PDF and IES formats, see: 8lighting.com/200-series-photometry.

Trim Finish and Accessory Notes

White trim finish is field paintable to match ceiling color. Lot variations may occur with specialty finishes. Ordering ALL trim kits at the same time is recommended to minimize finish variations. Trim lens accessories are factory installed into trim plates and are UL WET LISTED and rated for use in DRY, DAMP, or WET locations (covered ceiling applications only). Approved for use in residential steam applications. Not for use in commercial steam applications.

Housing and Installation Notes


Type Non-IC housings are rated for installations where insulation is held back a minimum of 3" away from sides and top. Type IC-CP housings are rated for direct contact with standard or spray-foam thermal insulation with a max combined R-Value of R42. Type IC-CP housings meet Washington State Airtight Standard WAC 51-11-0502 and in accordance with ASTM E283 to reduce energy loss and are CCEA plenum rated for City of Chicago environmental air spaces. For installations in direct contact with thermal insulation, ambient temperatures in ceiling space should not exceed 25°C (77°F) during normal operation. For installations where insulation is held back a minimum of 3" from sides and top, ambient temperatures in ceiling space should not exceed 40°C (104°F) during normal operation.

Warranty

All No. 8 Lighting products are covered by a 5 year limited warranty. Products installed in residential steam applications are covered by a 2 year limited warranty. For specific warranty details and limitations, see: 8lighting.com/resources-downloads.


JA8-2025 CA Title 24 Compliant except with Type Non-IC housing options:
NIC-R, NIC-FR, and NIC-FR-W.

203-R + NIC-R and IC-CP-2-R NEW CONSTRUCTION HOUSINGS with FLANGED TRIM INSTALLATION

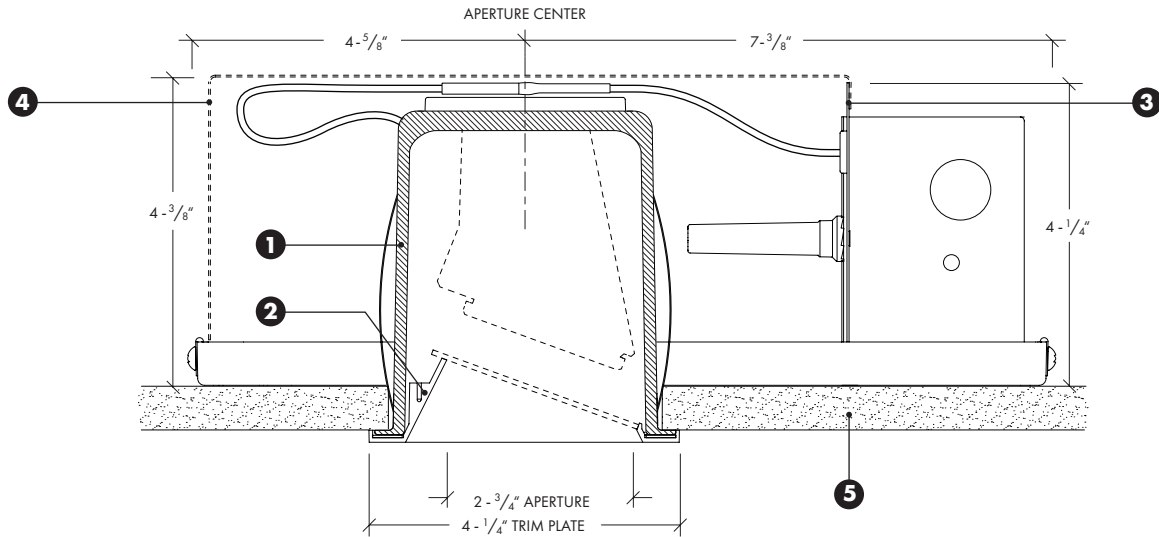


- 1) **203-R** Adjustable ROUND Light Engine for BEVEL Trim.
- 2) **FLR-2-WW** Flanged ROUND WALL WASH Trim.
- 3) **NIC-R** Type Non-IC housing and power supply for ROUND Light Engine and FLANGED Trim installation.
- 4) **IC-CP-2-R** (shown dashed) Type IC Rated/Air-tight/CCEA approved housing and power supply for ROUND Light Engine and FLANGED Trim installation.
- 5) **Ceiling Material** (Sheetrock/Wood/Stone/Acoustic Tile) Accommodates ceiling thicknesses from 1/2" (min) to 1-1/2" (max) without affecting aiming or rotation.

203-R + NIC-R and IC-CP-2-R NEW CONSTRUCTION HOUSINGS with FLANGED TRIM INSTALLATION

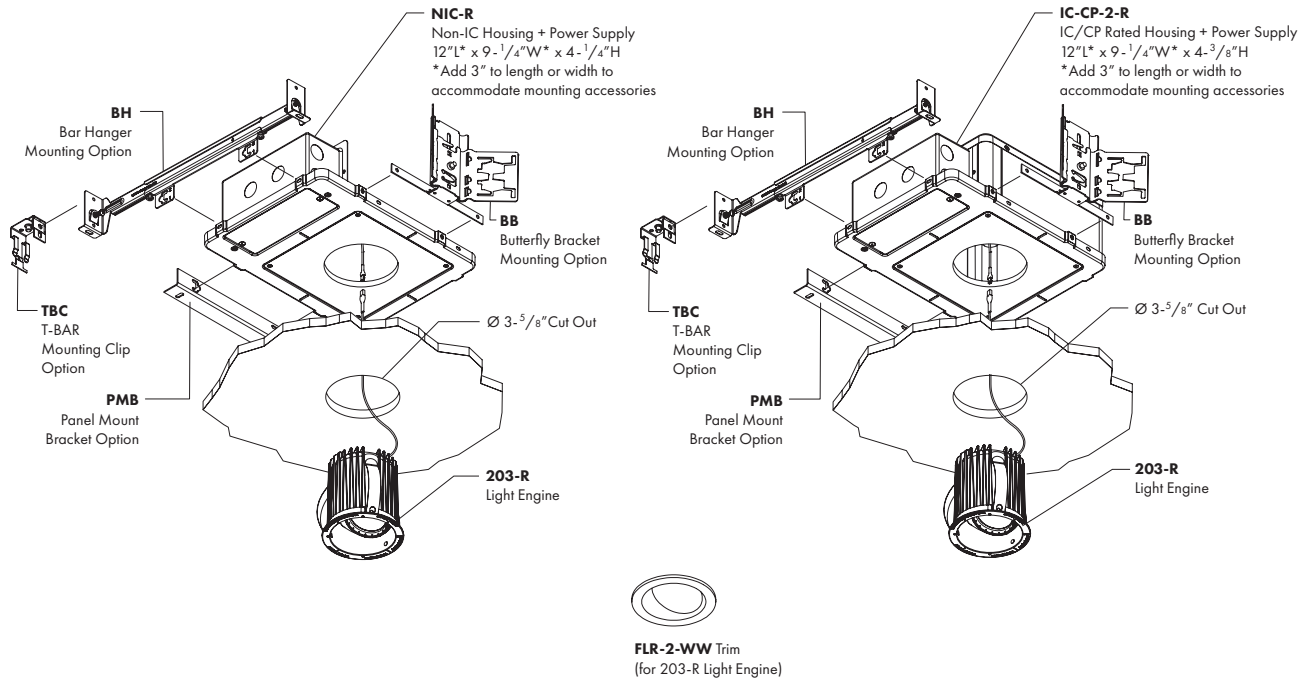


CEILING TYPES: Sheetrock, Wood, Stone & Acoustic Tile | **CEILING THICKNESS:** 1/2" Min to 1- 1/2" Max | **CUT-OUT:** Ø 3-5/8"

203-R + NIC-FR and IC-CP-2-FR with FLANGELESS TRIM INSTALLATION for SHEETROCK CEILINGS

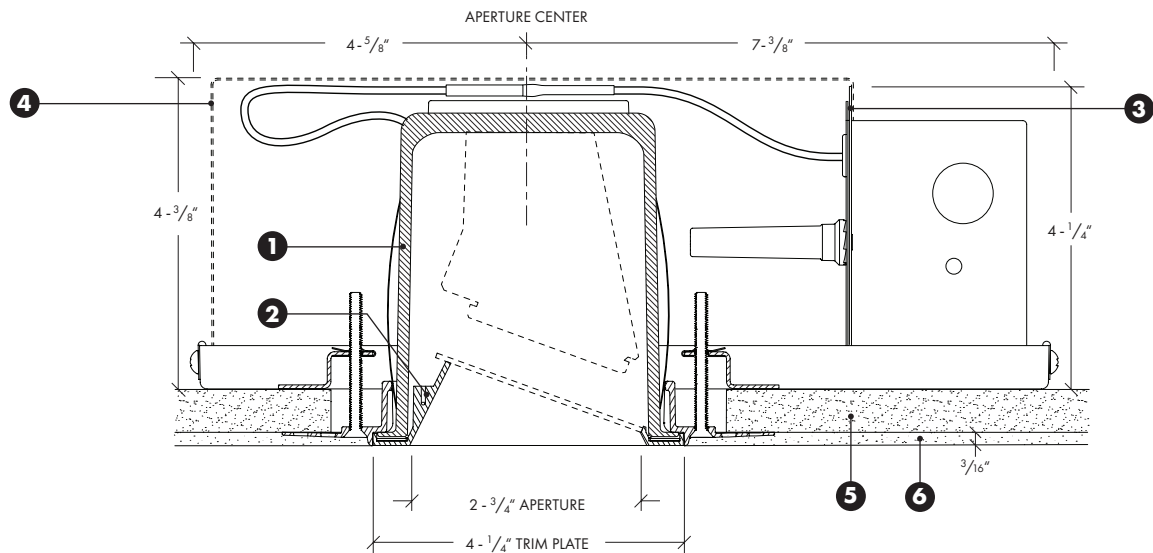


- 1) **203-R** Wall Wash ROUND Light Engine with fixed 20° tilt.
- 2) **FLR-2-WW** Flanged ROUND WALL WASH Trim + **FR-2** ROUND FLANGELESS Trim accessory.
- 3) **NIC-FR** Type Non-IC housing and power supply for ROUND Light Engine and FLANGELESS Trim in sheetrock ceiling applications.
- 4) **IC-CP-2-FR** (shown dashed) Type IC Rated/Air-tight/CCEA approved housing and power supply for ROUND Light Engine and FLANGELESS Trim in sheetrock ceiling applications.
- 5) **Ceiling Material** (sheetrock) Accommodates ceiling thicknesses from 1/2" (min) to 1-1/2" (max) without affecting aiming or rotation.
- 6) **Ceiling Finish** (Drywall Compound or Plaster) Accommodates 3/16" finish thickness. Minimum level 4 or 5 finish recommended.

203-R + NIC-FR and IC-CP-2-FR with FLANGELESS TRIM INSTALLATION for SHEETROCK CEILINGS

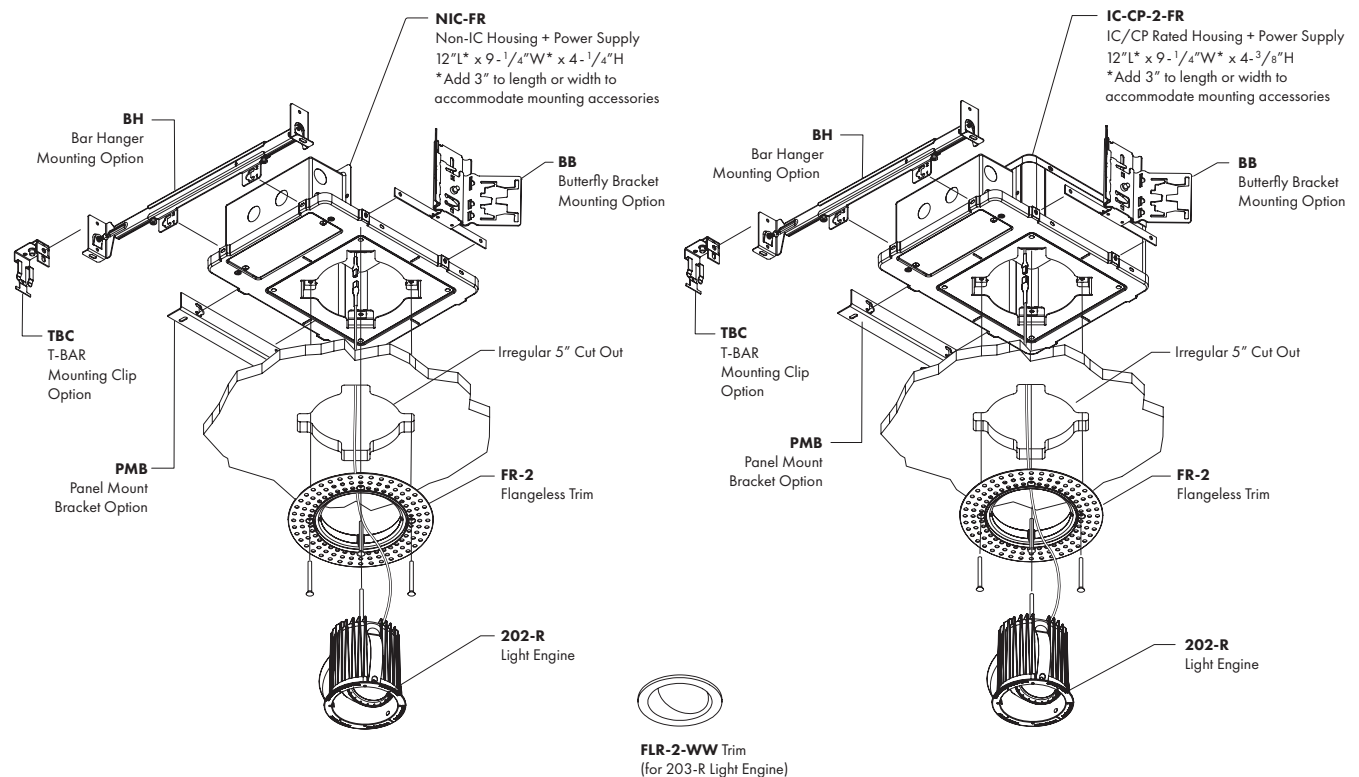


CEILING TYPES: Sheetrock | **CEILING THICKNESS:** 1/2" Min to 1-1/2" Max | **CUT-OUT:** 5" Irregular

203-R + NIC-FLR-W and IC-CP-2-FR-W with FLANGELESS TRIM INSTALLATION for WOOD/STONE CEILINGS

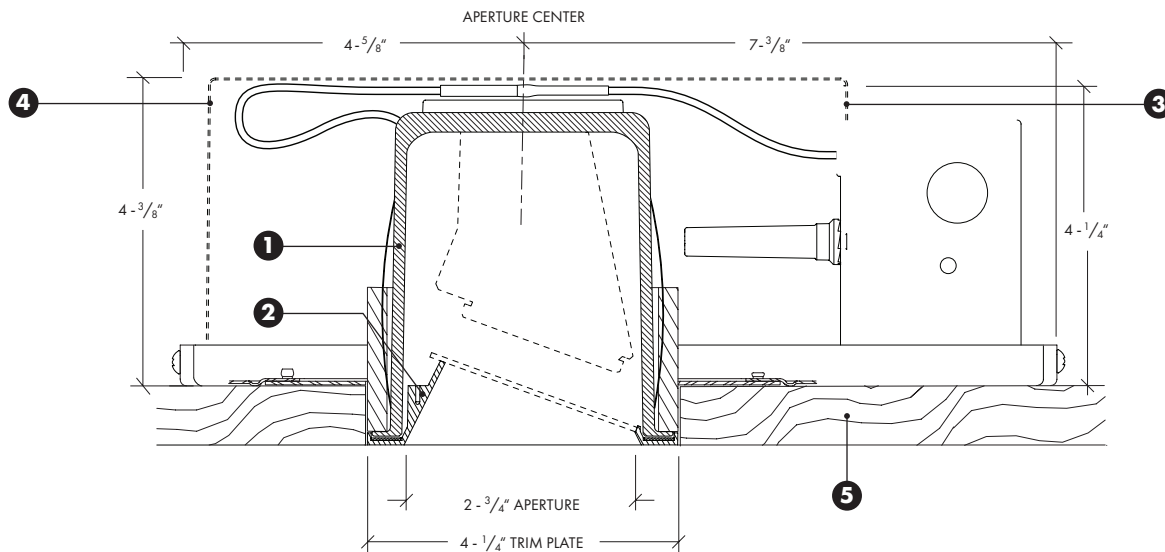

- 1) 203-R Wall Wash ROUND Light Engine with fixed 20° tilt.
- 2) FLR-2-WW Flanged ROUND WALL WASH Trim.
- 3) NIC-FR-W Type Non-IC housing and power supply for ROUND Light Engine and FLANGELESS Trim in wood/stone ceiling applications.
- 4) IC-CP-2-FR-W (shown dashed) Type IC Rated/Air-tight/CCEA approved housing and power supply for ROUND Light Engine and FLANGELESS Trim in wood/stone ceiling applications.
- 5) Ceiling Material (Wood/Stone) Accommodates ceiling thicknesses from 1/2" (min) to 1-1/2" (max) without affecting aiming or rotation.

203-R + NIC-FR-W and IC-CP-2-FR-W with FLANGELESS TRIM INSTALLATION for WOOD/STONE CEILINGS

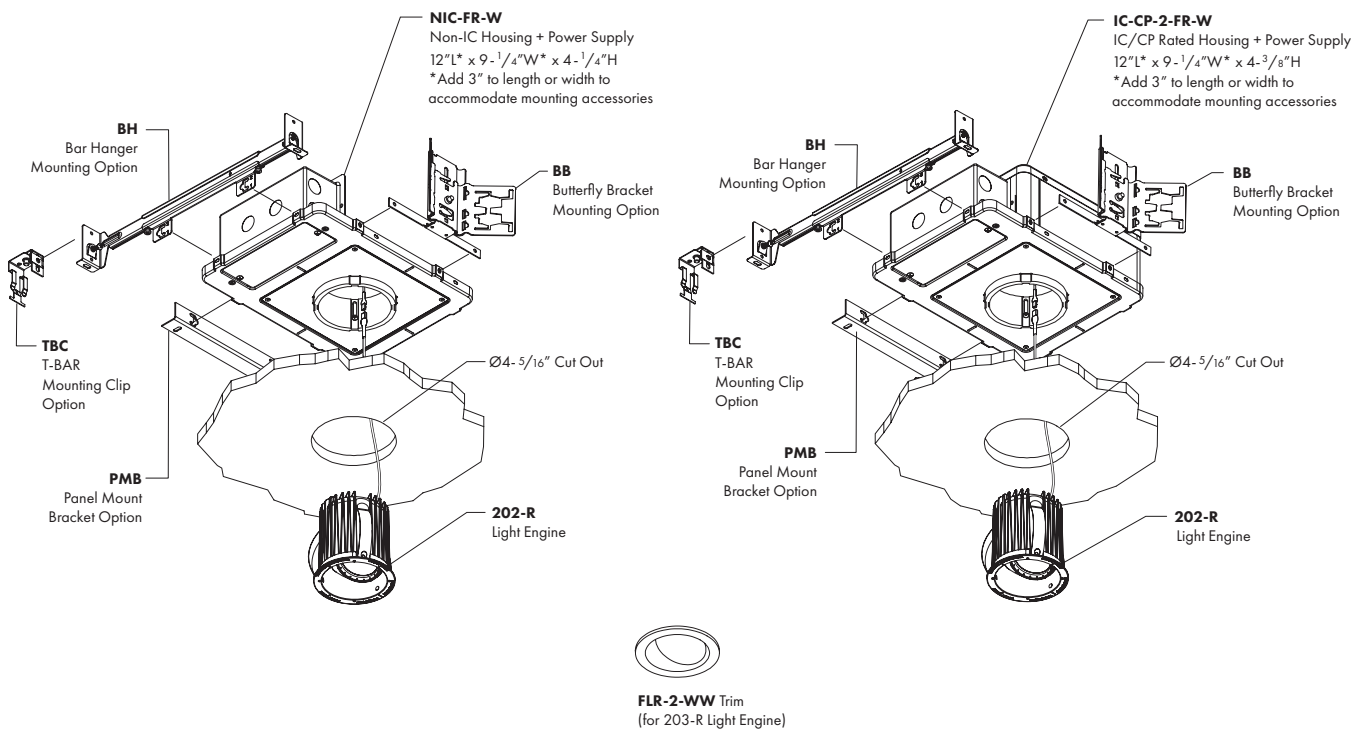

CEILING TYPES: Wood/Stone | CEILING THICKNESS: 1/2" Min to 1-1/2" Max | CUT-OUT: Ø 4-5/16"

203-R with FLR-2-WW TRIM - PERFORMANCE SUMMARY

LED	CCT	CRI	R9	Delivered Lumens	System Wattage	Delivered LPW
HI-27	2700K	93+	66	954-988	13.5	71-74
HI-30	3000K	93+	68	992-1027	13.5	74-77
HI-35	3500K	93+	73	1015-1051	13.5	76-79
HI-40	4000K	93+	70	1038-1075	13.5	77-81
WD-5	3000-1800K	92+	79	843-878	13.5	63-66
WD-6	2800-2200K	92+	67	891-916	13.5	62-64
WD-7	3000-2200K	92+	69	891-916	13.5	66-67

Performance shown for HI LED with 40° and 60° optic options.

Performance shown for WD-5 and WD-7 LED at 3000K and WD-6 LED at 2800K with 40° and 60° optic options.

203-R-HI-30 w/ FLS-2-WW TRIM - FOOTCANDLES ON WALL

OPTIC OPTION			40°						60°					
DISTANCE FROM WALL			2.0 ft			2.5 ft			2.0 ft			2.5 ft		
ON CENTER SPACING				2.5 ft			3.0 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.8	0.8	0.8	0.4	0.4	0.4	1.1	1.1	1.1	0.6	0.6	0.6
		1.5 ft	21.6	18.6	21.6	6.7	6.2	6.7	25.6	22.1	25.6	9.3	8.5	9.3
		2.5 ft	44.5	48.0	44.5	25.3	26.1	25.3	42.9	47.9	42.9	27.2	27.6	27.2
		3.5 ft	36.7	41.0	36.7	28.6	31.7	28.6	31.3	35.2	31.3	26.3	30.0	26.3
		4.5 ft	24.9	27.7	24.9	23.1	25.9	23.1	20.1	22.2	20.1	19.6	21.9	19.6
		5.5 ft	16.4	18.0	16.4	16.9	18.8	16.9	13.0	14.1	13.0	13.7	15.1	13.7
		6.5 ft	10.9	11.8	10.9	12.1	13.2	12.1	8.7	9.3	8.7	9.6	10.4	9.6
		7.5 ft	7.5	8.0	7.5	8.7	9.4	8.7	6.0	6.4	6.0	6.9	7.4	6.9
		8.5 ft	5.3	5.6	5.3	6.3	6.7	6.3	4.3	4.5	4.3	5.0	5.3	5.0
		9.5 ft	3.8	4.0	3.8	4.7	5.0	4.7	3.2	3.3	3.2	3.7	4.0	3.7

Performance shown for 3000K. Output varies by CCT.

203-R-WD-5 w/ FLS-2-WW TRIM - FOOTCANDLES ON WALL

OPTIC OPTION			40°						60°					
DISTANCE FROM WALL			2.0 ft			2.5 ft			2.0 ft			2.5 ft		
ON CENTER SPACING				2.5 ft			3.0 ft			2.5 ft			3.0 ft	
	DISTANCE FROM CEILING	0.5 ft	0.6	0.6	0.6	0.3	0.3	0.3	0.9	0.9	0.9	0.5	0.5	0.5
		1.5 ft	17.8	15.2	17.8	5.5	4.9	5.5	21.3	18.6	21.3	7.6	6.9	7.6
		2.5 ft	38.3	41.4	38.3	21.6	22.1	21.6	36.7	40.9	36.7	22.9	23.2	22.9
		3.5 ft	31.8	35.6	31.8	24.7	27.5	24.7	26.9	30.4	26.9	22.6	25.8	22.6
		4.5 ft	21.6	24.1	21.6	20.1	22.5	20.1	17.4	19.2	17.4	16.8	18.9	16.8
		5.5 ft	14.2	15.6	14.2	14.7	16.3	14.7	11.3	12.2	11.3	11.8	13.0	11.8
		6.5 ft	9.5	10.3	9.5	10.5	11.5	10.5	7.5	8.0	7.5	8.3	9.0	8.3
		7.5 ft	6.5	6.9	6.5	7.5	8.1	7.5	5.2	5.5	5.2	5.9	6.4	5.9
		8.5 ft	4.6	4.8	4.6	5.5	5.9	5.5	3.7	3.9	3.7	4.3	4.6	4.3
		9.5 ft	3.3	3.5	3.3	4.1	4.3	4.1	2.7	2.8	2.7	3.2	3.4	3.2

Performance shown for 3000K. Output varies by CCT.