
200-HD Series – New Construction LED


HOSPITALITY, DESIGN, and COMMERCIAL APPLICATIONS

FEATURES


- **Recessed New Construction**
  Non-IC: 5" H
  IC / Airtight / CP Rated: 5-3/8" H
- **Light Engine**
  0-30° Adjustable for Accent, Wall Wash, and General Lighting Applications
- **LED Options**
  Static White - High Output
  Warm Dimming
- **Optic Options**
  15°, 25°, 40°, and 60°
- **Optical Accessories**
  Five Beam Enhancing Lens Options
- **Driver Options**
  Integral: Forward/Reverse Phase, 0-10V, DALI, EcoSystem
- **Trim Options**
  Flat:1-7/8" aperture
  Bevel: 2-1/4" aperture
  Wall Wash: 2-3/4" aperture
- **Trim Mounting Options**
  Flanged (for multiple ceiling types)
  Flangeless for Sheetrock
  Flangeless for Wood
- **CA JA8 2025 Compliant**
- **Four Finish Options**

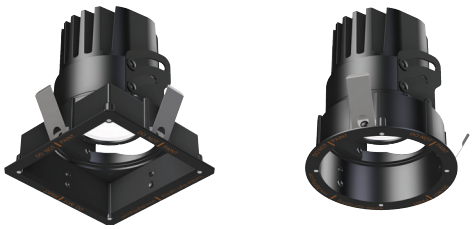

200-HD-S/200-HD-R
NEW CONSTRUCTION LIGHT ENGINES

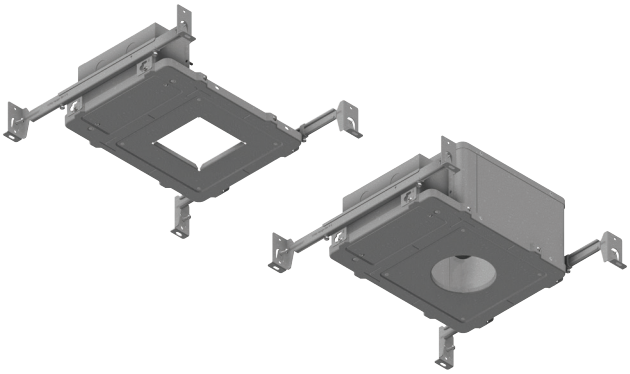

200-HD SERIES
NEW CONSTRUCTION HOUSINGS
for ROUND or SQUARE LIGHT ENGINES

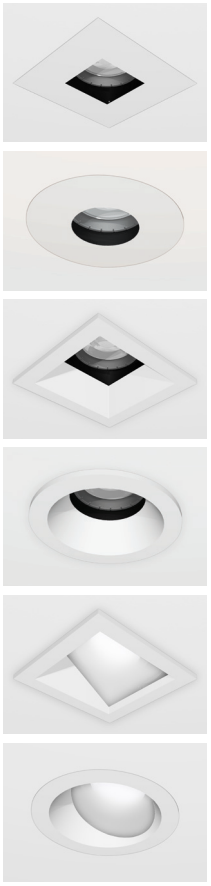

WHITE


SATIN ALUMINUM


SATIN ALUMINUM w/ WHITE FLANGE


OIL-RUBBED BRONZE

200-HD SERIES PERFORMANCE SUMMARY

	Static White - Non-IC Rated				Static White - IC Rated			
LED Options	**HI-27**	**HI-30**	**HI-35**	**HI-40**	**HI-27**	**HI-30**	**HI-35**	**HI-40**
Delivered Lumens	1942	2026	2065	2130	1597	1666	1698	1751
System Wattage	26	26	26	26	19.5	19.5	19.5	19.5
Efficacy	75	79	80	83	82	85	87	90
CRI	94	94	94	94	94	94	94	94
R9	62	64	67	71	62	64	67	71
CCT	2700K	3000K	3500K	4000K	2700K	3000K	3500K	4000K

Performance data shown for 200-HD-S-BV with FLS-2-BV Trim.

526 Portal Street
Cotati, CA 94931
USA
P 707.794.0888
www.8lighting.com

All No. 8 Lighting fixtures and components are UL Listed to both U.S. and Canadian requirements. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2026 No. 8 Lighting

9/2026

93003-08