



8165 E Kaiser Blvd. Anaheim, CA 92808  
www.lightlaboratory.com

Report No: L081910622



**Report No:** L081910622

**Issue Date:** 8/26/2019

**Report Prepared For:** Number Eight Lighting Company  
526 Portal Street, Cotati, CA 94931

**Model Number:** 201-R-WD-3018-25-NFL/DIM1-2-SO/FLR-2-WH

**Test:** Photometric/Electrical Test

**Standards Used:** Appropriate part or all test guidelines were used for test performed:

*IESNA LM79: 2008* Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products

*ANSI NEMA ANSLG C78.377: 2008* Specification of the Chromaticity of Solid State Lighting Products

*ANSI C82.77:2002:* Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

**Description of Sample:** Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

**Special Test Condition:** Fixture is tested with no special conditions.

**Sample Arrival Date:** 8/16/19

**Date of Tests:** 8/21/19 - 8/26/19

**Seasoning of Sample:** No seasoning was performed in accordance with IESNA LM-79.

**Equipment List**

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	1/9/21
BK PRECISION	1747	PS-DC04	1/10/21
Fluke Digital Thermometer	52K/J	MT-TP05	1/10/21
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

**General Information**

<b>Manufacturer:</b>	Number Eight Lighting Company
<b>Model Number:</b>	201-R-WD-3018-25-NFL/DIM1-2-SO/FLR-2-WH
<b>Driver Model Number:</b>	INTUITIVE SYSTEMS ISD-701-350-15-D

**Photometric & Electrical Test Results**

<b>Total Lumens:</b>	542.02
<b>Efficacy:</b>	37.10
<b>Input Voltage (VAC/60Hz):</b>	120.00
<b>Input Current (Amp):</b>	0.1227
<b>Input Power (W):</b>	14.61
<b>Input Power Factor:</b>	0.9923
<b>Current ATHD (%):</b>	7.1%

**Test Condition**

<b>Ambient Temperature (°C):</b>	25.0
<b>Stabilization Time (Hours):</b>	1:15
<b>Total Operating Time (Hours):</b>	2:15

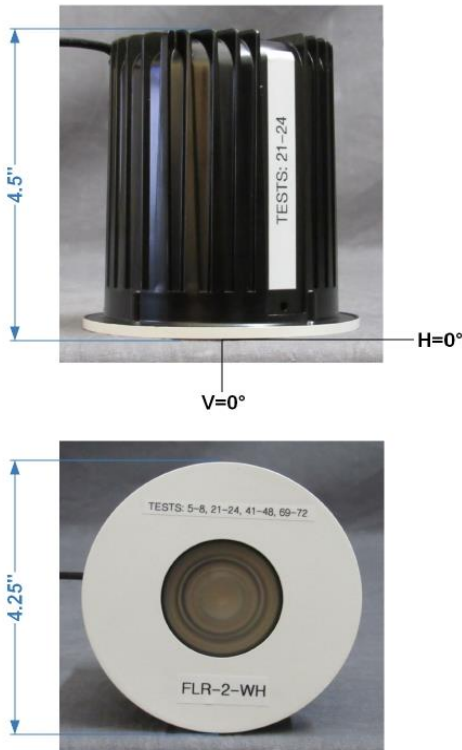


FIG. 1 LUMINAIRE

## Test Methods

### Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

### Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

### Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Keyur Patel

Test Report Reviewed by:



Steve Kang  
Quality Assurance

*\*Attached are photometric data reports. Total number of pages: 9*



8165 E. Kaiser Blvd. Anaheim, CA 92808  
 www.lightlaboratory.com

# Photometric Test Report

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : L081910622.IES**

## DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002  
 [TEST] L081910622  
 [TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)  
 [ISSUEDATE] 8/26/2019  
 [MANUFAC] Number Eight Lighting Company  
 [LUMCAT] 201-R-WD-3018-25-NFL/DIM1-2-SO/FLR-2-WH  
 [LUMINAIRE] LED Recessed Fixed Position Downlight, 3000-1800K 90+ CRI, 25° Beam Spread,  
 [MORE] NFL Lens, Standard Output 1% Dimming Driver, Round Flanged Trim, 1.875" Aperture  
 [BALLASTCAT] INTUITIVE SYSTEMS ISD-701-350-15-D  
 [OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND  
 [MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.  
 [INPUT] 120.0VAC, 14.61W  
 [TEST PROCEDURE] IESNA:LM-79-08

## CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	542
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	37
Total Luminaire Watts	14.61
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.58
Spacing Criterion (90-270)	0.58
Spacing Criterion (Diagonal)	0.60
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.16 ft (Diameter)
Luminous Width (90-270)	0.16 ft (Diameter)
Luminous Height	0.00 ft

## LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	14372	14372	14372
55	2797	2797	2797
65	0	0	0
75	0	0	0
85	0	0	0

IES INDOOR REPORT  
PHOTOMETRIC FILENAME : L081910622.IES

CANDELA TABULATION

	<u>0</u>
0.0	1293
1.0	1299
3.0	1284
5.0	1238
7.0	1170
9.0	1087
11.0	982
13.0	865
15.0	758
17.0	656
19.5	536
22.5	403
25.5	292
29.0	191
33.0	112
37.5	58
42.5	26
47.5	12
55.0	3
65.0	0
75.0	0
85.0	0
90.0	0

**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : L081910622.IES**

**ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	310.93	N.A.	57.40
0-30	455.21	N.A.	84.00
0-40	513.63	N.A.	94.80
0-60	540.60	N.A.	99.70
0-80	542.02	N.A.	100.00
0-90	542.02	N.A.	100.00
10-90	449.56	N.A.	82.90
20-40	202.70	N.A.	37.40
20-50	224.86	N.A.	41.50
40-70	28.39	N.A.	5.20
60-80	1.42	N.A.	0.30
70-80	0.00	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	542.02	N.A.	100.00

Total Luminaire Efficiency = N.A.%

**ZONAL LUMEN SUMMARY**

Zone	Lumens
0-10	92.46
10-20	218.47
20-30	144.28
30-40	58.42
40-50	22.16
50-60	4.81
60-70	1.42
70-80	0.00
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


**IES INDOOR REPORT**  
**PHOTOMETRIC FILENAME : L081910622.IES**

**COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD**

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	110	108	106	105	104	102	102	101	99	98	97	97	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85
4	100	94	89	85	99	92	88	85	90	87	84	88	85	83	87	84	82	80
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69
8	85	77	71	68	84	76	71	68	75	71	67	74	70	67	73	70	67	66
9	82	73	68	65	81	73	68	64	72	67	64	71	67	64	70	67	64	63
10	79	70	65	62	78	70	65	62	69	64	61	68	64	61	67	64	61	60

POLAR GRAPH

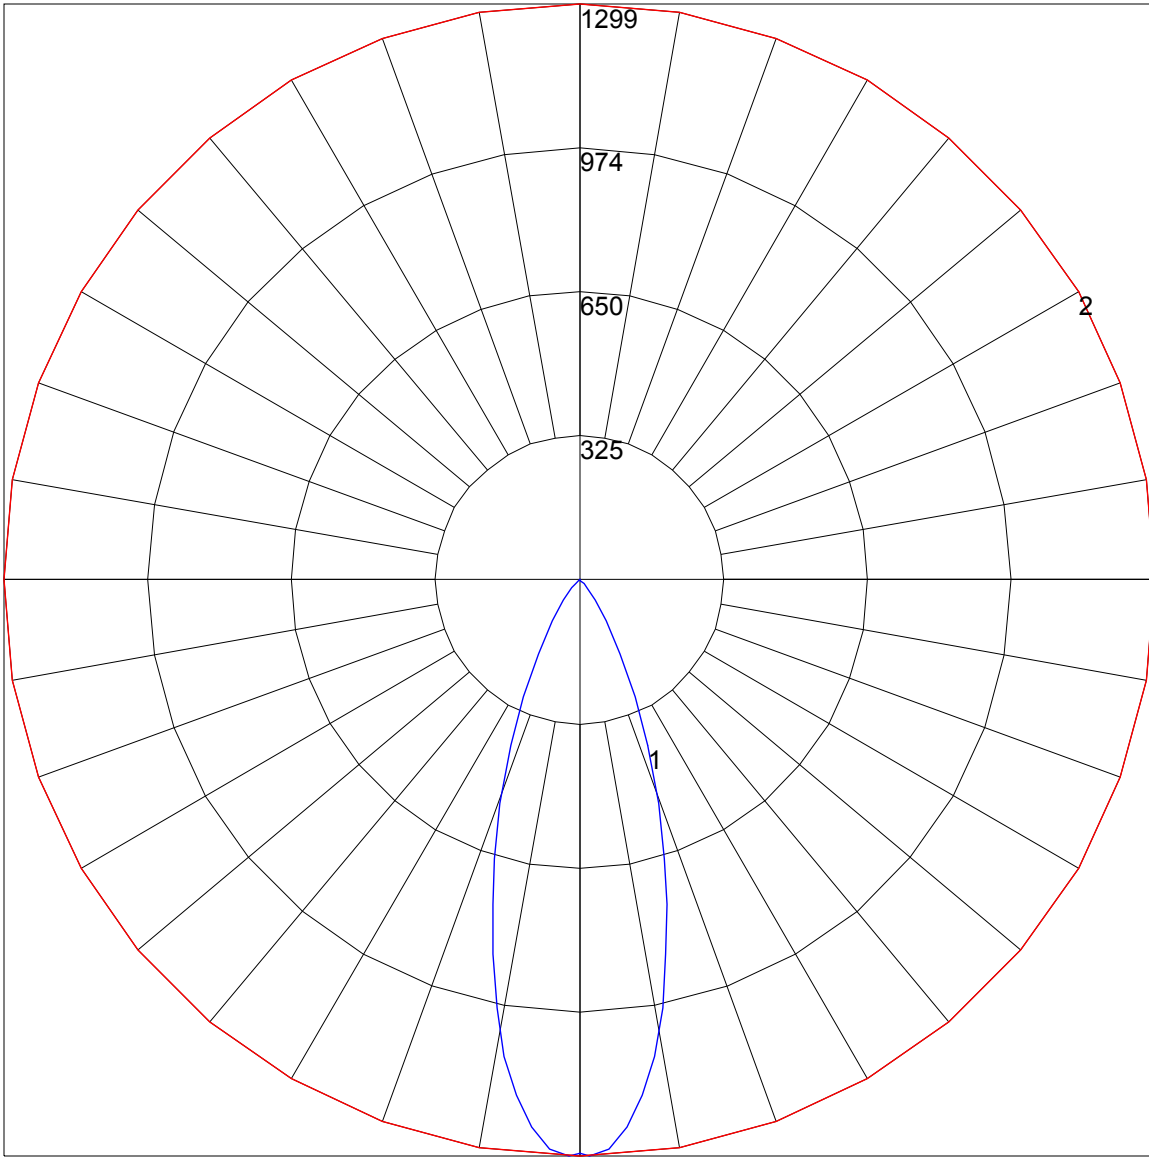

Maximum Candela = 1299 Located At Horizontal Angle = 0, Vertical Angle = 1  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)



ILLUMINANCE CONE DIAGRAM: BEAM (50%)  
MOUNT HEIGHT(Ft): 12

