

HOUSING: **804S** – LOW PROFILE LAMP MODULE: **M2S** – MIRROR REFLECTOR | LED

Project Name	
Date	Type
Prepared By	
Comments	
Catalog # 804S/M2S- - - - / / - /	



eight
LIGHTING

526 Portal Street
Cotati, CA 94931
USA
P 707.794.0888
F 707.795.4379
www.8lighting.com

All No. 8 Lighting fixtures and components are UL/CSA listed. Select 804S Series fixtures and components are also CE Certified. No. 8 Lighting trims and lamp modules are protected by one or more U.S. Patents. No. 8 Lighting reserves the right to change details of design, materials, and finish.

© 2020 No. 8 Lighting
Doc # 91173-12.5



PRODUCT FEATURES

HOUSING

- **804S** Low-Profile universal IC and Non-IC Rated housing available with two output options. Meets Washington State Airtight Standard WAC 51-11-0502 and in accordance with ASTM E283 to reduce energy loss. CCEA plenum rated for City of Chicago environmental air spaces. Low and Standard output options are IC-Rated for direct contact with standard or spray-foam thermal insulation with a max combined R-Value of R42. High output options are Non-IC rated for use where insulation can be kept a minimum of 3" away from all sides.
- Accepts **J2S**, **K2S**, and **M2S** LED Lamp Modules and all **800 Series** Trim Assemblies. Note: Minimum 4-1/2" ceiling space required when used with **INSET** and **BEVEL** Series Trim Assemblies.

Lamp Module

- **M2S** Fully adjustable lamp module features 45-90° vertical and 90° horizontal adjustment. Use on sloped ceilings for adjustable accent, wall wash, and general lighting applications.
- Lamp module assembly includes either a **SQUARE** or **ROUND** trim plate for use with **800 Series Seamless** trims.

LED Options

- **HI** 3000K 92+ CRI White LED. Minimum 2-Step color binning.
- **HI-2** 3000K 92+ CRI White LED. Minimum 2-Step color binning. Note: For use with 10° optic option only.
- **WD** 3000-1800K 97+ CRI Warm Dim LED. Minimum 3-Step color binning.
- **WD-2** 2800-2200K 95+ CRI Warm Dim LED. Minimum 3-Step color binning.

Note: To ensure fixture to fixture color consistency, use of the same LED option with adjacent fixtures is recommended.

Optic Options and Accessories

- Optic options include: 10°, 15°, 25°, and 40°. Note: 10° optic option for use with **HI-2** LED option only.
- Optional beam enhancing lens accessories include: **NSP**-Narrow Softening, **NFL**-Medium Softening, **FL**-Wide Softening, **WFL**-Extra Wide Softening, and **LS**-Linear Spread.
- Optional color filtering lens accessories include: **CF24**-2400K, **CF27**-2700K, & **CF35**-3500K.

Trim Finish Options

- Available finishes include: **WH** - White (field paintable to match ceiling finish) or **OB** - Oil-Rubbed Bronze.

Dimming Options

- **DIM1-8** Phase dimming LED driver with 120v/60Hz input. Dimmable to 1% using compatible Forward or Reverse-Phase dimmers.
- **DIM2-8** 0-10v LED dimming driver with 120-277v/60Hz input. Dimmable to 1% using compatible 0-10v dimmers.
- **PR1-8** Premium phase dimming LED driver with 120v/60Hz input. Dimmable to 0.1% using compatible Forward or Reverse-Phase dimmers.
- **EL1-8** EldoLED 0-10v LED dimming driver with 120-277v/60Hz input. Dimmable to 1% using compatible 0-10v dimmers.
- **EL2-8** EldoLED DALI dimming LED driver with 120-277v/60Hz input. Dimmable to 1% using compatible DALI dimmers.
- **LU1-8** Lutron Hi-lume **LTEA2W** 1% 2-wire LED driver (120v Forward Phase only). 120v/60Hz input.
- **LU2-8** Lutron Hi-lume **LDE1** 1% EcoSystem LED driver w/ Soft-on, Fade-to-Black. 120-277v/60Hz input.
- **LU4-8** Lutron Hi-lume Premier **PEQOE** 0.1% EcoSystem LED driver w/ Soft-on, Fade-to-Black. 120-277v/60Hz input.

For a complete list of compatible dimmers, see 8lighting.com/resources-downloads


Output

- **1000** Standard output. Delivers up to 712 lumens.
- **1000-WD** Standard output – Warm Dimming. Delivers up to 569 lumens.
- **1400** High output. Delivers up to 944 lumens. Available in Type Non-IC only.

For photometric files in PDF and IES formats, see 8lighting.com/800-series-photometry

Mounting Accessories

- **BH** Bar Hangers for joist mounting.
- **BB** Butterfly Brackets for use with commercial c-channel or bar mounting.
- **TBC-BH** T-BAR Mounting Clips + Bar Hangers for T-Bar mounting.
- **PMB** Panel Mounting Brackets (set of two) for direct mounting to wood panels.

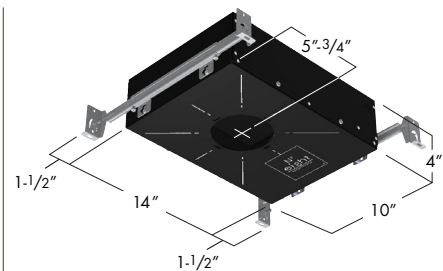


804S - LOW PROFILE HOUSING
(shown with BH mounting accessory)



M2S - LED MIRROR REFLECTOR




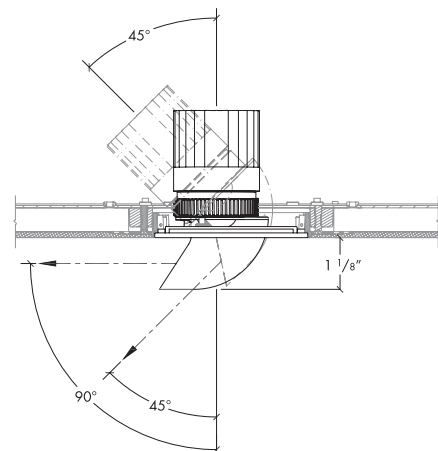

LAMP MODULE **M2S** – TRIM ASSEMBLY CROSS SECTION DETAIL



Note: Cross sections are for illustration purposes only. Refer to housing installation instructions for complete installation details.

PRODUCT SPECIFIER/PRODUCT ORDER NUMBER

804S / **M2S-** - - - - - / - - - - - / - - - - -

HOUSING	LAMP MODULE	LED OPTIONS	OPTIC OPTIONS	OPTICAL ACCESSORIES (Optional)	TRIM FINISH	DIMMING OPTIONS	OUTPUT	MOUNTING ACCESSORIES
 <p>804S New Construction – Low-Profile AIRTIGHT-IC and Non-IC Rated 10"W* x 14"L* x 4"H *Add 3" to length or width to accommodate mounting accessories</p>	<p>LED MIRROR REFLECTOR M2S-S 4" SQUARE module w/ integral trim plate fits into square Seamless Series™ trim assemblies.</p>  <p>M2S-R 4" ROUND module w/ integral trim plate fits into round Seamless Series™ trim assemblies.</p> 	<p>HI 3000K White LED HI-2* 3000K White LED WD† 3000-1800K Warm Dim LED WD-2† 2800-2200K Warm-Dim LED *For use with 10° optic only. Available in low and standard outputs only. †Available in standard output only</p>	<p>10* 10° Very Narrow Spot 15 15° Narrow Spot 25 25° Narrow Flood 40 40° *For use with HI-2 LED option only</p>	<p>NSP Narrow Softening Lens NFL Medium Softening Lens FL Wide Softening Lens WFL Extra Wide Softening Lens LS Linear Spread Lens CF24 2400K Color Filtering Lens CF27 2700K Color Filtering Lens CF35 3500K Color Filtering Lens</p>	<p>WH WHITE  OB* OIL-RUBBED BRONZE  *Specialty finish</p>	<p>DIM1-8 Forward or Reverse-Phase 1% Dimming DIM2-8 0-10v 1% Dimming PR1-8* Premium Forward or Reverse-Phase 0.1% Dimming EL1-8† EldoLED 0-10v 1% Dimming EL2-8† EldoLED DALI 1% Dimming LU1-8 Lutron Hi-Lume Forward-Phase 1% Dimming LU2-8 Lutron Hi-Lume Eco System 1% Dimming LU4-8 Lutron 0.1% Eco-System Dimming *Not available with WD or WD-2 LED options † Also CE Certified with HI or HI-2 LED options</p>	<p>1000 Standard output 1000-WD Standard output – Warm Dimming 1400* High output *Non-IC only. Not available w/ LU2-8 or LU4-8 dimming options.</p>	<p>BH Bar Hangers BB Butterfly Brackets TBC-BH T-Bar Mounting Clips + Bar Hangers PMB Panel Mounting Brackets</p>

Optic Option and Accessory Notes

One field interchangeable optic option included standard. Up to two additional optical accessories can be accommodated.

Trim Finish Notes

White trim finish is field paintable to match ceiling color. Lot variations may occur with specialty finishes. Ordering ALL trim kits at the same time is recommended to minimize finish variations.

Installation Notes

For Low and Standard output models, ambient temperatures in ceiling space should not exceed 40°C (104°F) during normal operation. For High Output models and all models with **LU1-8** or **LU2-8** dimming options, ambient temperatures should not exceed 25°C (77°F).

Warranty

All No. 8 Lighting products are by a 5-year limited warranty. For specific warranty details and limitations, see 8lighting.com/resources-downloads

804S/M2S PERFORMANCE SUMMARY

LED	Output	CCT	CRI	Delivered Lumens	System Wattage	Delivered LPW	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
HI	1000	3000	92+	596-712	15	39-47	92.3	96.6	99.2	91.9	92.0	96.3	91.2	79.7	55.0	91.4	92.9	82.1	93.5	99.4
WD	1000-WD	3000-1800	97+	474-569	14.8	32-39	99.1	99.0	96.1	98.6	98.1	97.2	97.3	94.9	87.8	95.5	97.5	82.5	99.6	96.8
HI	1400	3000	92+	755-944	20.7	37-46	92.8	98.3	97.0	90.7	92.5	97.3	89.4	79.0	54.7	94.9	91.9	82.1	94.6	99.2

LED Lumen Multipliers: For **HI-2** LED with 10° optic, use multiplier of 1.20. For **WD-2** LED, use multiplier of 0.97.

OPTICAL OPTIONS AND ACCESSORY PERFORMANCE SUMMARY

OPTICAL OPTIONS	BEAM ENHANCING LENS (OPTIONAL)*				
	+ NSP	+ NFL	+ FL	+ WFL	+ LS
10° Very Narrow Spot	14°	27°	46°	71°	14 x 52°
15° Spot	20°	27°	42°	61°	19 x 47°
25° Narrow Flood	27°	34°	47°	67°	26 x 52°
40° Flood	41°	42°	56°	68°	36 x 57°
<i>Lens Lumen Multiplier</i>	0.93	0.87	0.88	0.82	0.89

LED Lumen Multipliers: For **HI-2** LED with 10° optic, use multiplier of 1.20. For **WD-2** LED, use multiplier of 0.97.