

Photometric / Colorimetric / Electric Report

Fixture Model:

400-WD-40-DIM1-4-350-FLS-4-WH

Trim Model:

FLS-4-WH

Date:

4/8/2022



Light efficiency:

55 Lumen/Watt

Light quality:

CRI: 96.9

Color temperature:

3097 K

CIE 1931:

**x: 0.429
y: 0.398**


Output: 799 lm

Peak: 1785 cd



Power: 14.5 W

PF: 1.0


Spectra:

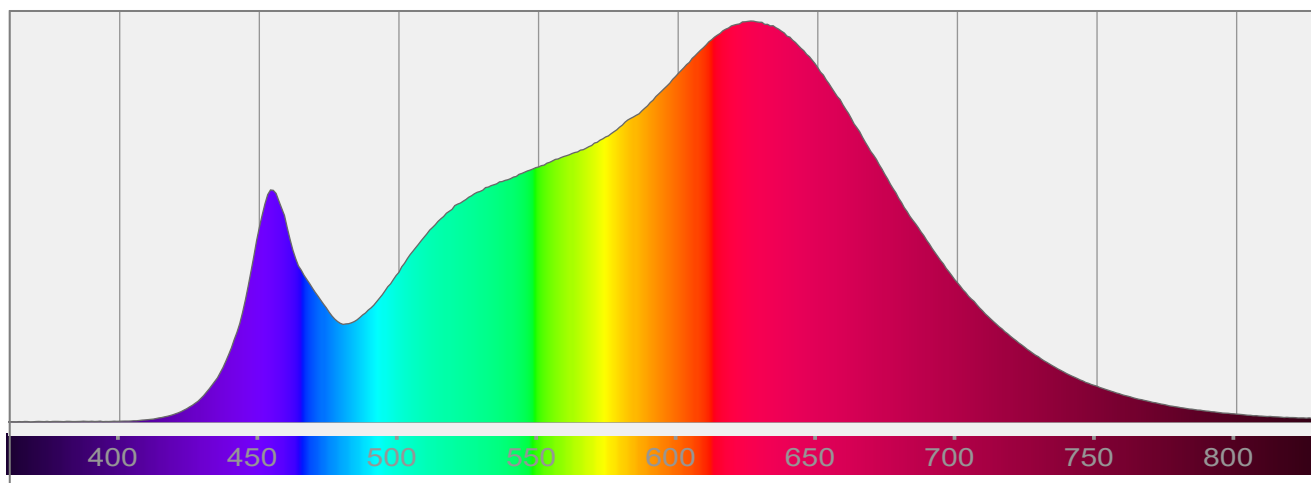


Color Details

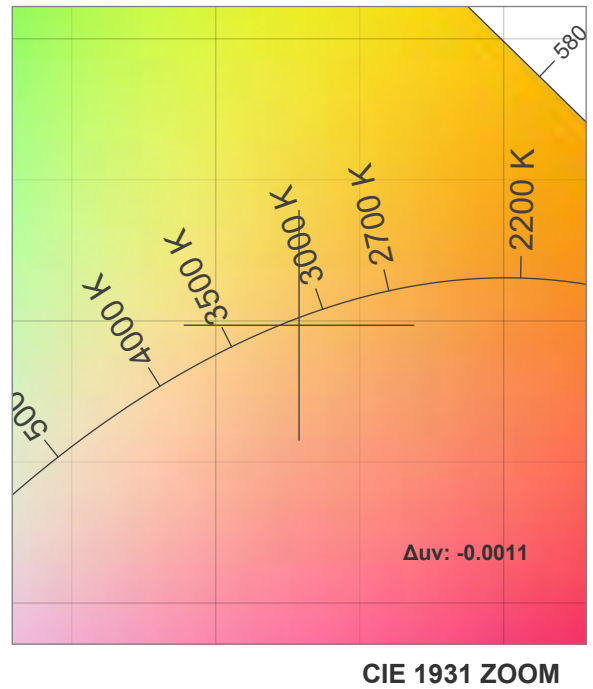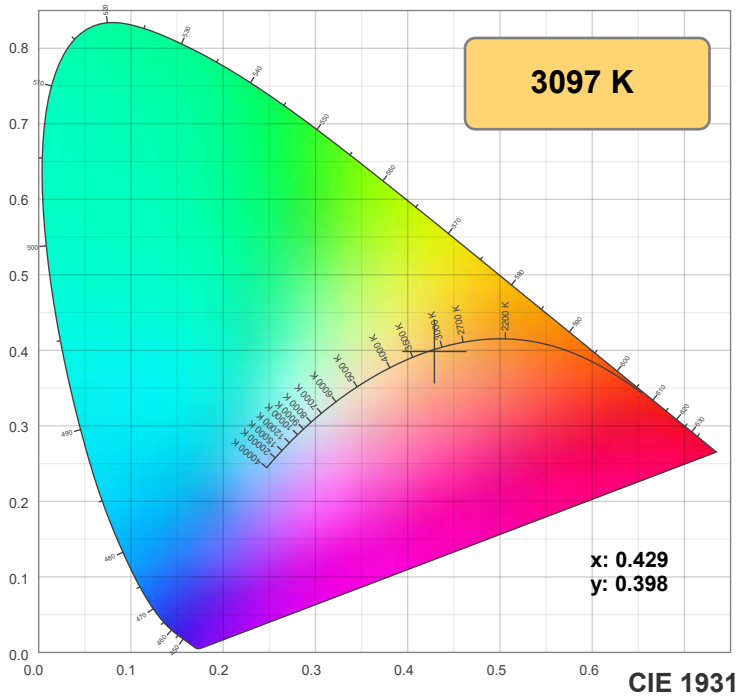

TM-30: 93.4

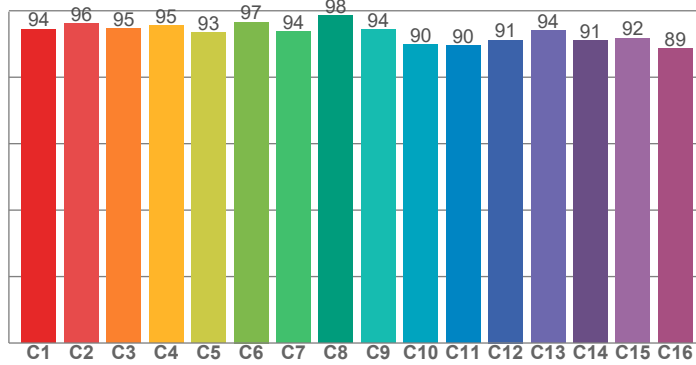

CRI: 96.9 (R1-R8)

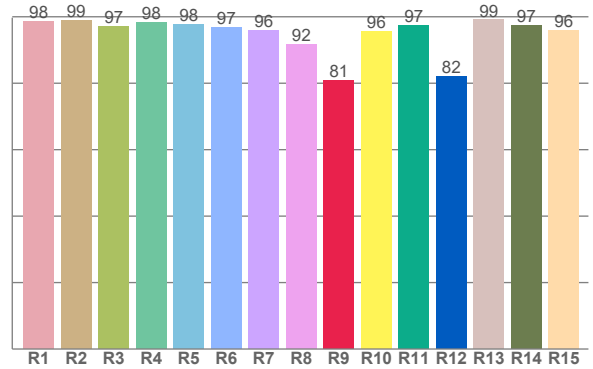

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.5	98.8	97.1	98.2	97.7	96.9	95.9	91.8	80.8	95.5	97.4	82.0	99.0	97.4	96.0


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.5	96.1	94.6	95.5	93.4	96.6	93.8	98.4	94.3	89.9	89.5	91.2	94.0	90.9	91.8	88.6

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92.6	96.7	89.9	90.4	94.2	96.0	93.4	95.2	97.5	95.5	95.9	96.2	96.3	93.2	93.0

CQS: 93.9

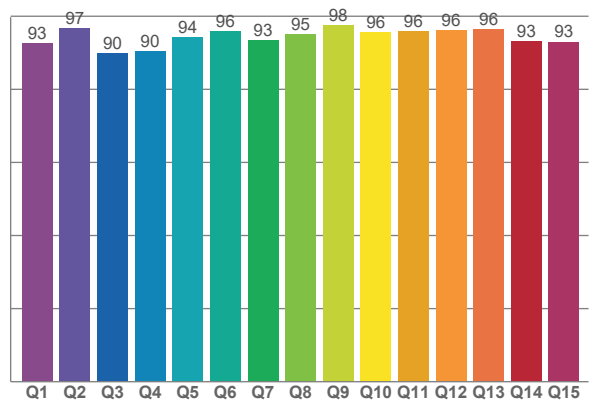

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3097 K	96.9	80.8	93.4	100.5	93.9	0.429	0.398	0.248	0.345	-0.0011

TM-30 Details







Rf 93.4

Fidelity index Rf


Rg 100.5

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	94	-2%	0%
2	96	-1%	1%
3	95	0%	2%
4	95	-2%	0%
5	93	-3%	1%
6	97	1%	1%
7	94	-2%	1%
8	98	0%	0%
9	94	-1%	4%
10	90	0%	6%
11	90	2%	7%
12	91	6%	0%
13	94	2%	-4%
14	91	4%	-6%
15	92	0%	-4%
16	89	1%	-9%

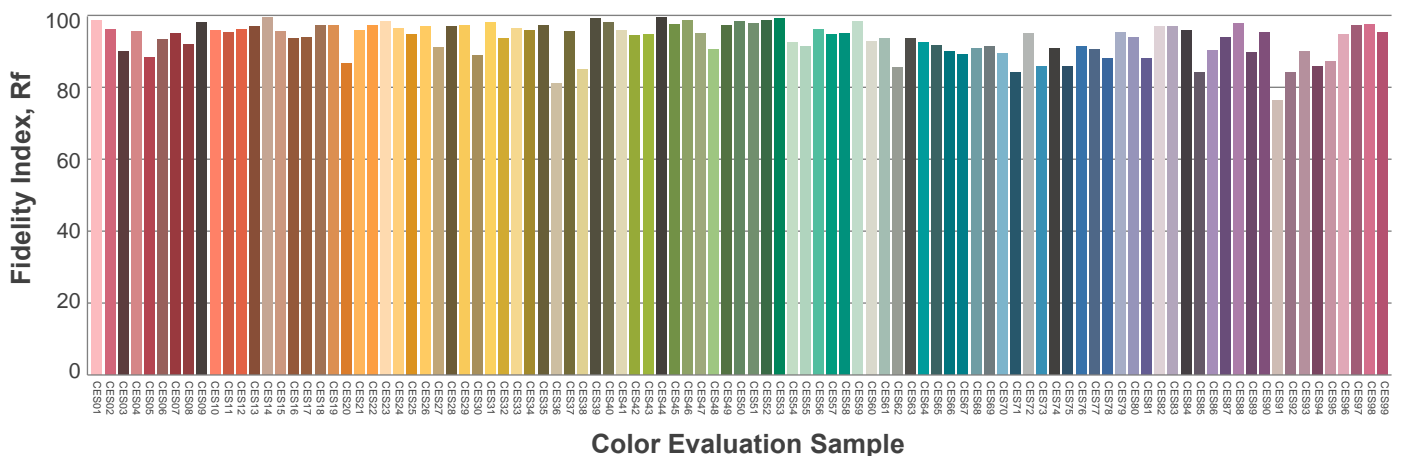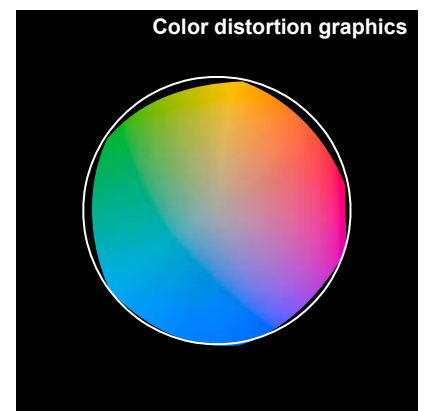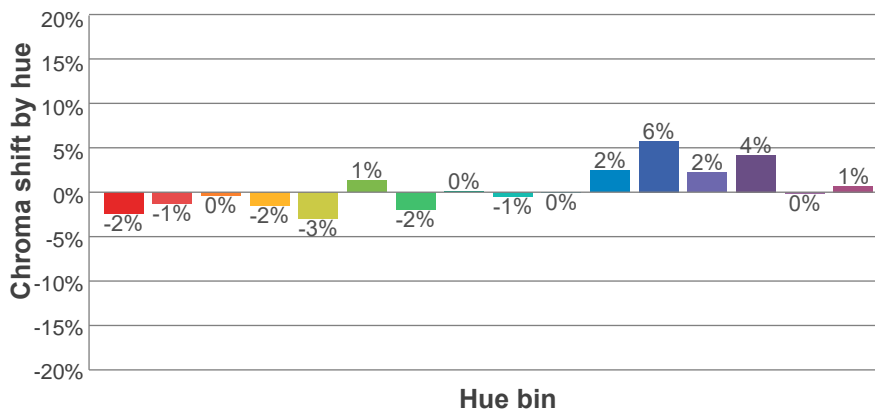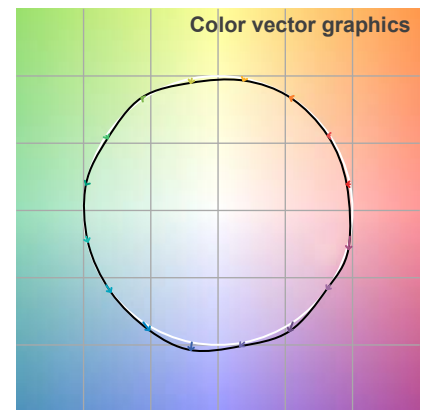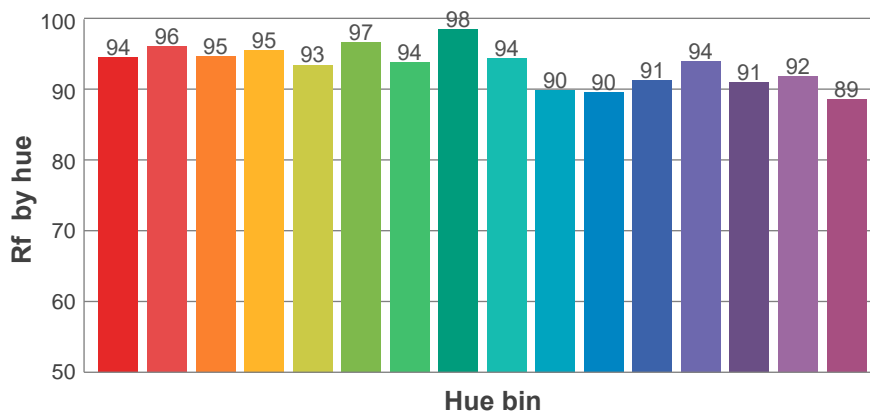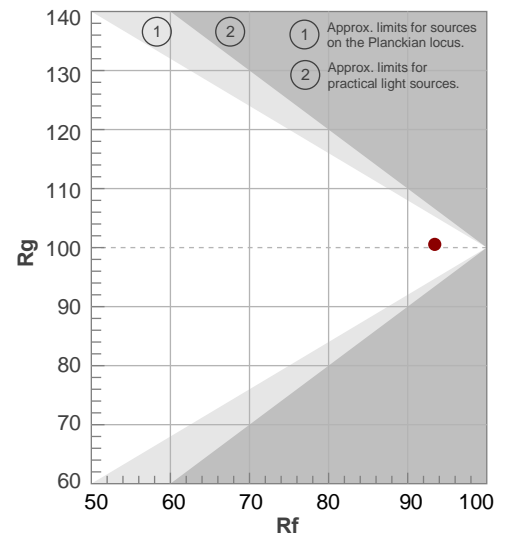

Beam Details

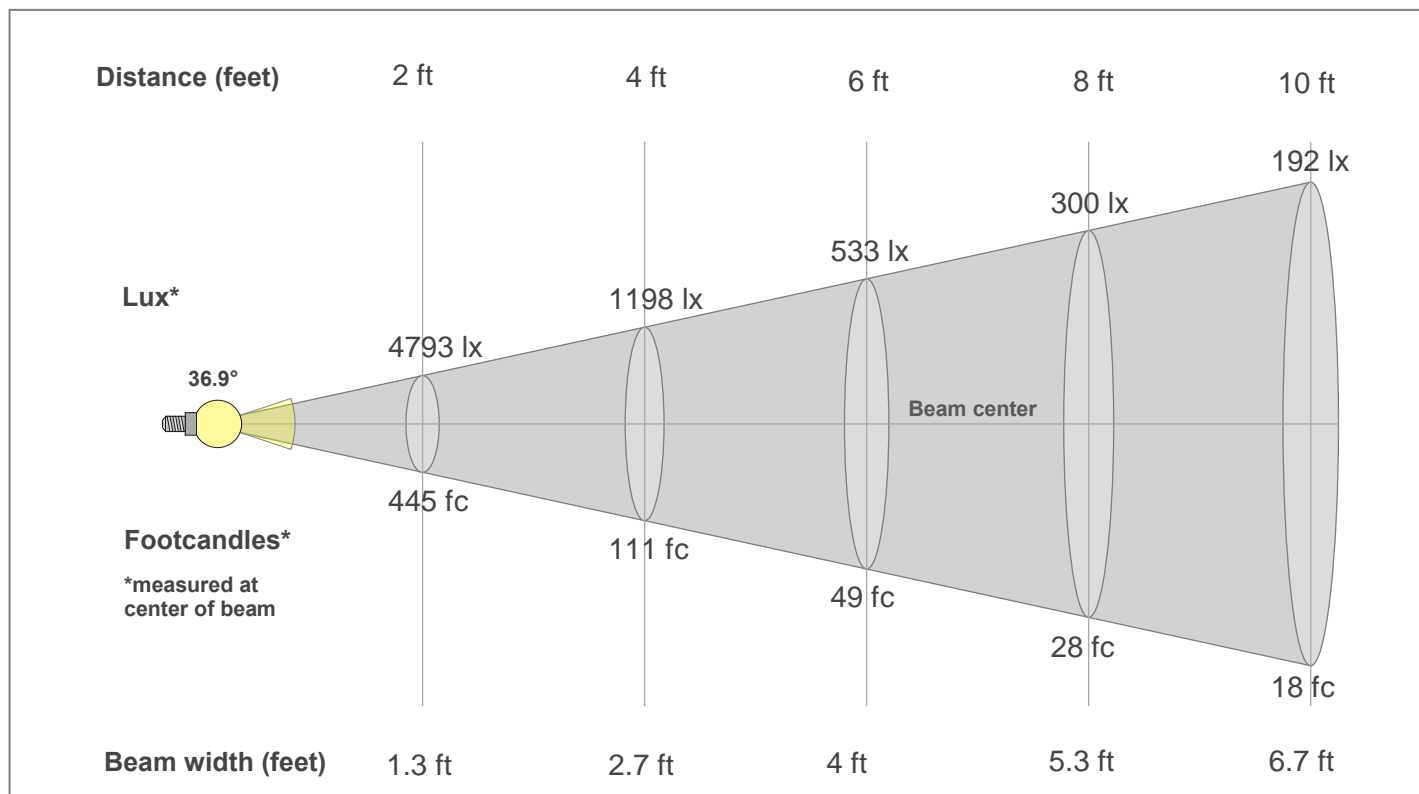

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1781lx	445lx	198lx	111lx	71lx	49lx	36lx	28lx	22lx	18lx	15lx	12lx	11lx	9lx	8lx	7lx	6lx	5lx	5lx	4lx
165.5fc	41.4fc	18.4fc	10.3fc	6.6fc	4.6fc	3.4fc	2.6fc	2fc	1.7fc	1.4fc	1.1fc	1fc	0.8fc	0.7fc	0.6fc	0.6fc	0.5fc	0.5fc	0.4fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1781	1765	1723	1656	1563	1452	1331	1197	1058	916	780	648	527	420	330	255	194	146	111	85
100%	99%	97%	93%	88%	82%	75%	67%	59%	51%	44%	36%	30%	24%	19%	14%	11%	8%	6%	5%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1781	1772	1731	1664	1574	1464	1341	1208	1069	927	789	656	534	424	334	259	195	146	110	84
100%	99%	97%	93%	88%	82%	75%	68%	60%	52%	44%	37%	30%	24%	19%	15%	11%	8%	6%	5%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1781	1765	1723	1656	1563	1452	1331	1197	1058	916	780	648	527	420	330	255	194	146	111	85
100%	99%	97%	93%	88%	82%	75%	67%	59%	51%	44%	36%	30%	24%	19%	14%	11%	8%	6%	5%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1781	1772	1731	1664	1574	1464	1341	1208	1069	927	789	656	534	424	334	259	195	146	110	84
100%	99%	97%	93%	88%	82%	75%	68%	60%	52%	44%	37%	30%	24%	19%	15%	11%	8%	6%	5%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
36.9°	65.2°	85.1°	99.5%	98.2%