

Photometric / Colorimetric / Electric Report

Fixture Model:


804S-J2S-WD-2-25-DIM1-8-350-FS-LG-P-1-WH-NL

Trim Model:

FS-LG-P-1-WH-NL

Date:

4/8/2022

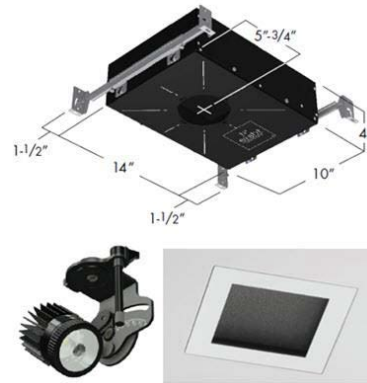

Light efficiency:

50 Lumen/Watt

Light quality:

CRI: 96.4

Color temperature:

2900 K

CIE 1931:

**x: 0.440
y: 0.398**


Output: 728 lm

Peak: 2158 cd



Power: 14.5 W

PF: 0.99


Spectra:

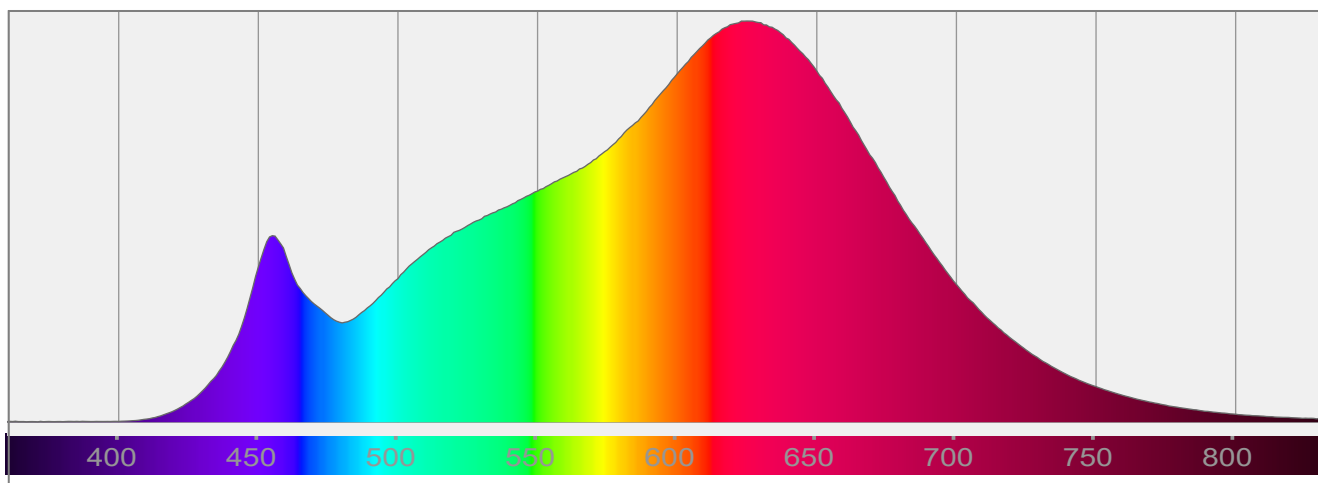


Color Details

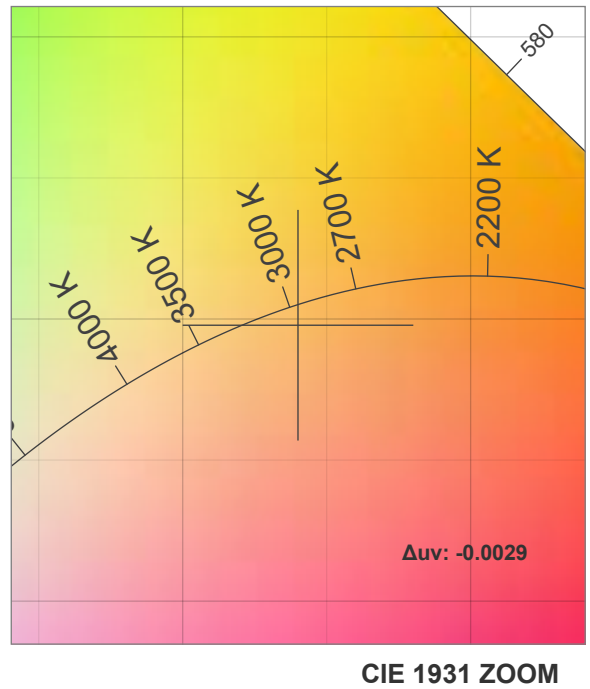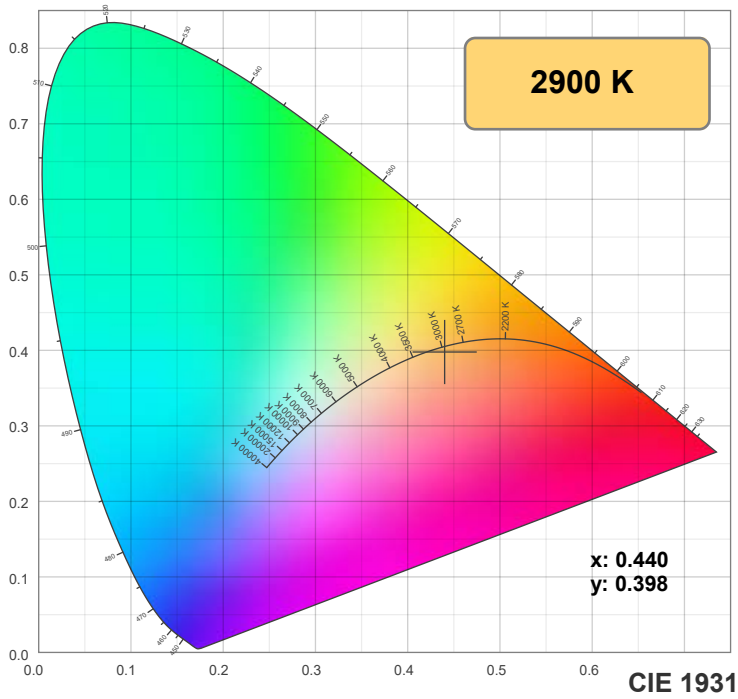

TM-30: 94.1

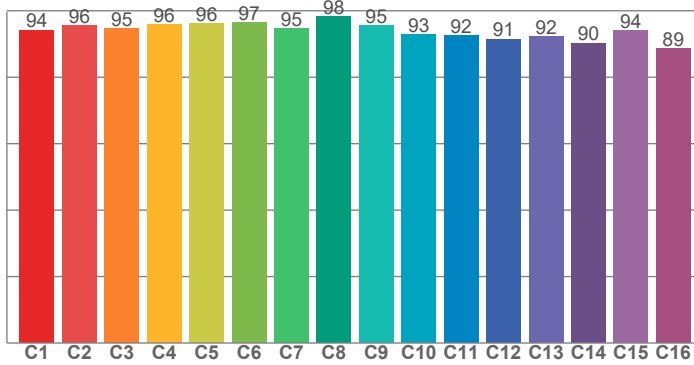

CRI: 96.4 (R1-R8)

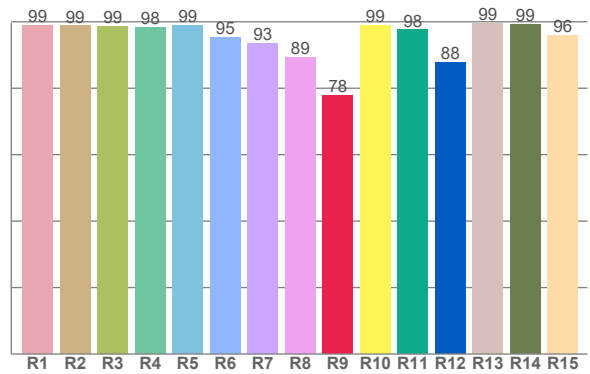

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.8	98.7	98.6	98.2	98.9	95.4	93.4	89.2	77.8	98.8	97.5	87.9	99.4	99.2	96.0


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94.2	95.6	94.6	95.8	96.0	96.5	94.6	98.3	95.5	93.0	92.4	91.5	92.1	90.3	94.0	88.7

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91.7	95.7	92.2	92.4	95.2	96.9	93.3	93.9	97.3	96.0	95.5	94.7	94.2	91.8	91.7

CQS: 93.8

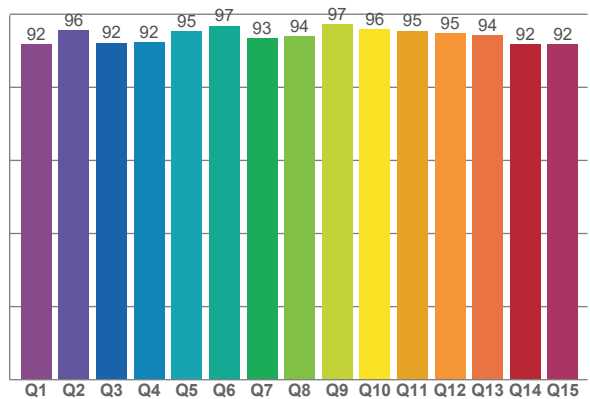

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2900 K	96.4	77.8	94.1	100.5	93.8	0.440	0.398	0.255	0.346	-0.0029

TM-30 Details







Rf 94.1

Fidelity index Rf


Rg 100.5

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	94	-3%	1%
2	96	-1%	2%
3	95	0%	3%
4	96	-2%	0%
5	96	0%	1%
6	97	1%	0%
7	95	-2%	1%
8	98	1%	0%
9	95	0%	3%
10	93	1%	4%
11	92	3%	5%
12	91	5%	-1%
13	92	2%	-6%
14	90	3%	-7%
15	94	-2%	-2%
16	89	-1%	-9%

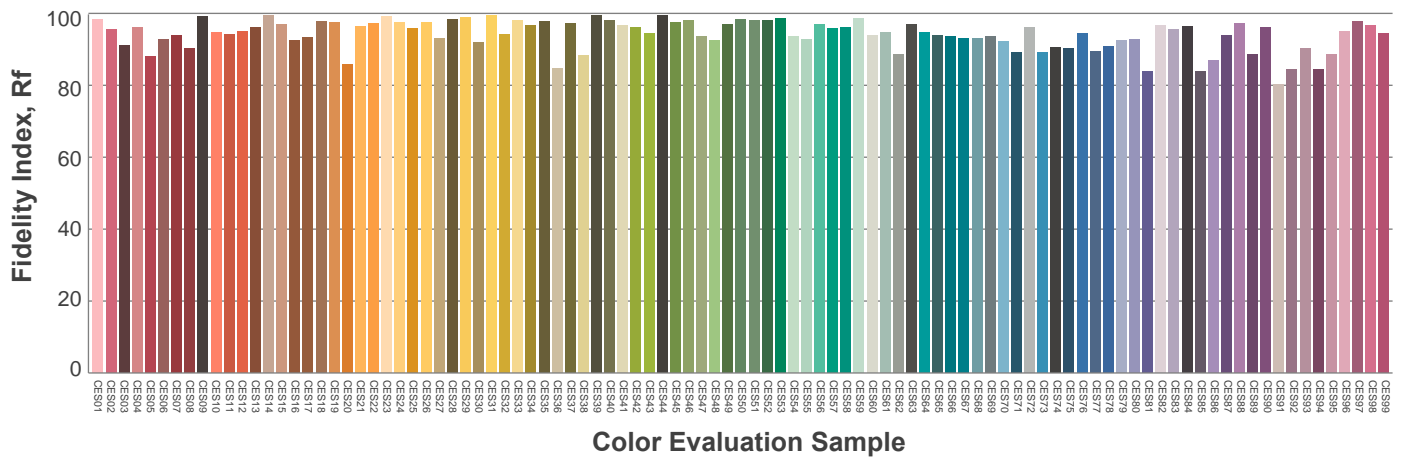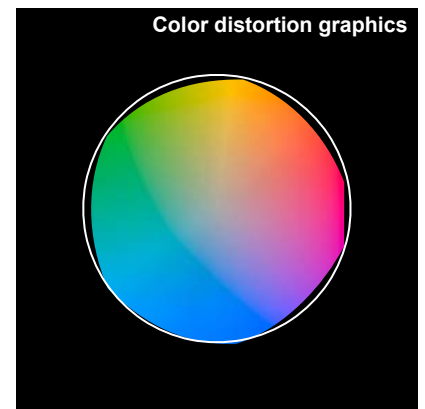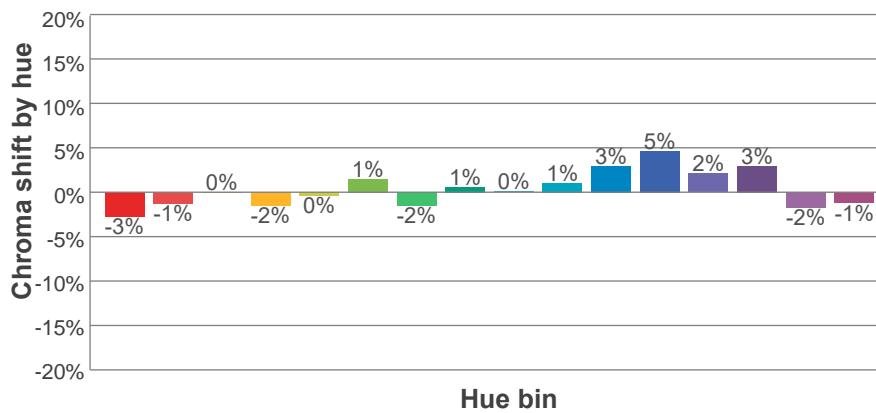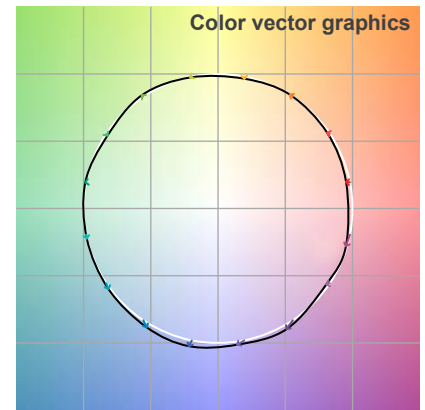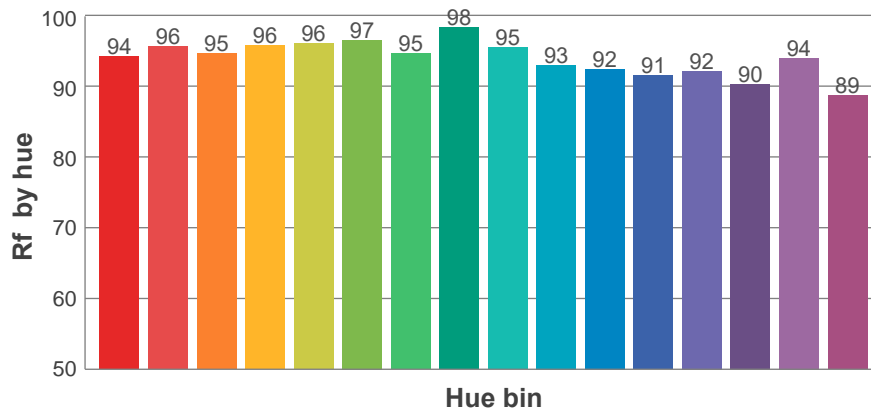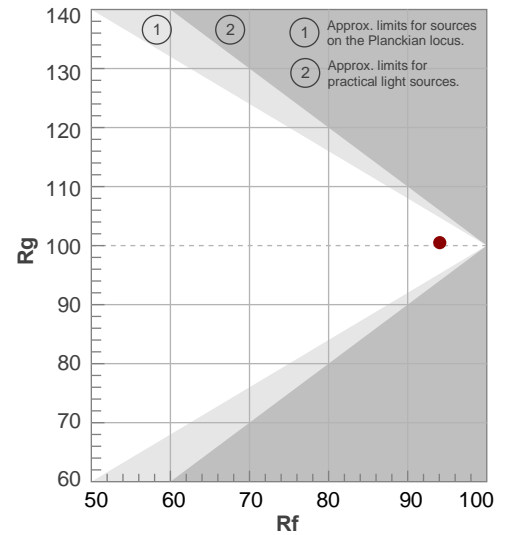

Beam Details

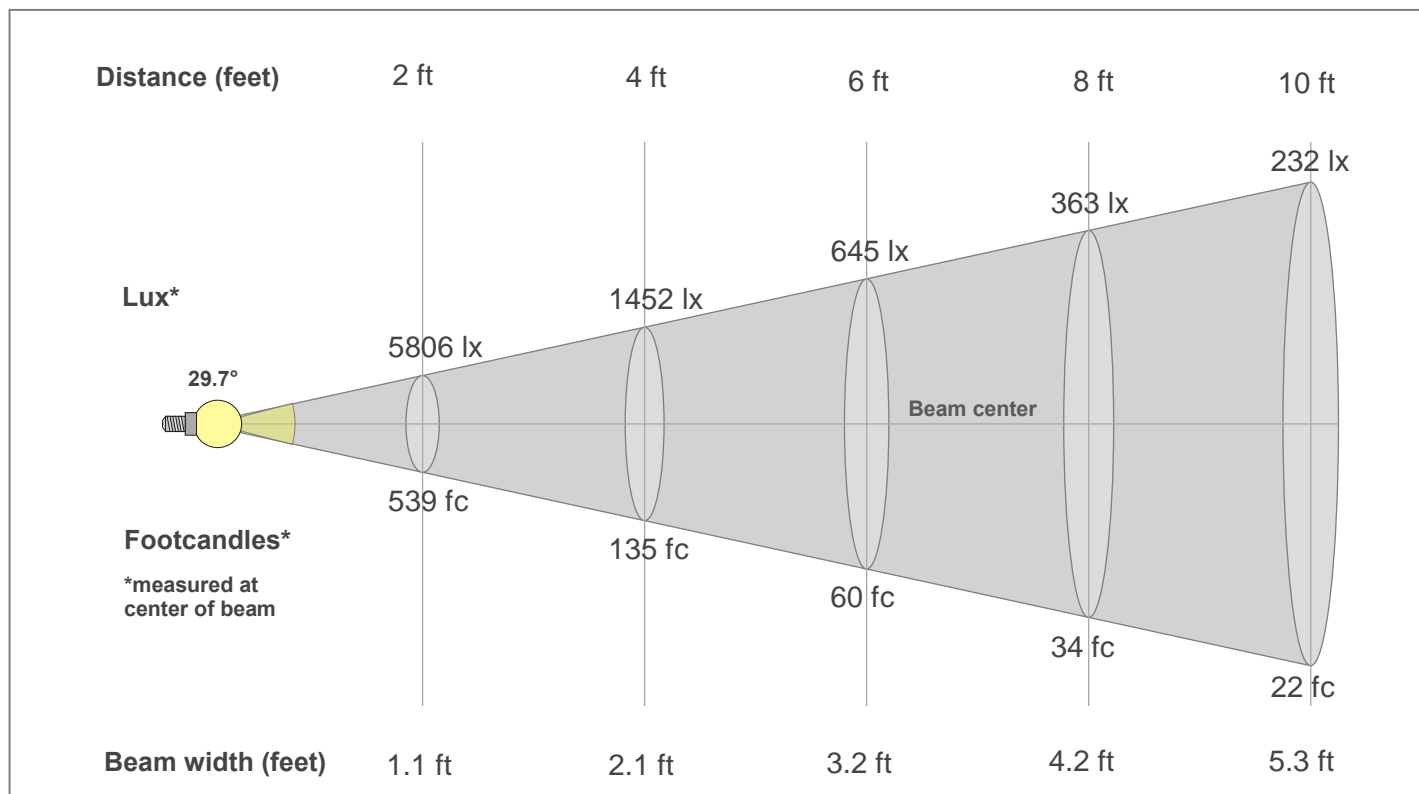

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2158lx	539lx	240lx	135lx	86lx	60lx	44lx	34lx	27lx	22lx	18lx	15lx	13lx	11lx	10lx	8lx	7lx	7lx	6lx	5lx
200.5fc	50.1fc	22.3fc	12.5fc	8fc	5.6fc	4.1fc	3.1fc	2.5fc	2fc	1.7fc	1.4fc	1.2fc	1fc	0.9fc	0.8fc	0.7fc	0.6fc	0.6fc	0.5fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2158	2128	2040	1907	1743	1558	1363	1164	970	793	638	504	397	314	249	200	161	129	102	76
100%	99%	95%	88%	81%	72%	63%	54%	45%	37%	30%	23%	18%	15%	12%	9%	7%	6%	5%	4%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2158	2128	2040	1907	1743	1558	1363	1164	970	793	638	504	397	314	249	200	161	129	102	76
100%	99%	95%	88%	81%	72%	63%	54%	45%	37%	30%	23%	18%	15%	12%	9%	7%	6%	5%	4%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2158	2128	2040	1907	1743	1558	1363	1164	970	793	638	504	397	314	249	200	161	129	102	76
100%	99%	95%	88%	81%	72%	63%	54%	45%	37%	30%	23%	18%	15%	12%	9%	7%	6%	5%	4%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2158	2128	2040	1907	1743	1558	1363	1164	970	793	638	504	397	314	249	200	161	129	102	76
100%	99%	95%	88%	81%	72%	63%	54%	45%	37%	30%	23%	18%	15%	12%	9%	7%	6%	5%	4%

Beam angle 50%	Field angle 10%	Cut-off angle 2.5%	Intensity ratio in 120°	Intensity ratio in 90°
29.7°	58.6°	80°	99.5%	98.6%