

Photometric / Colorimetric / Electric Report

Fixture Model:


805-J5-TW-25-3000K-DAL2-8.5-700-FR-P-1-WH-35d

Trim Model:

FR-P-1-WH

Date:

1/20/2025

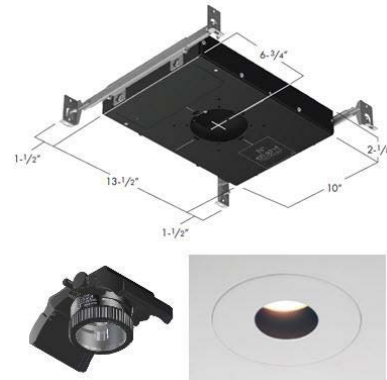

Light efficiency:

45 Lumen/Watt

Light quality:

CRI: 96.8

Color temperature:

3015 K

CIE 1931:

**x: 0.430
y: 0.390**


Output: 692 lm

Peak: 2567 cd



Power: 15.5 W

PF: 0.99


Spectra:

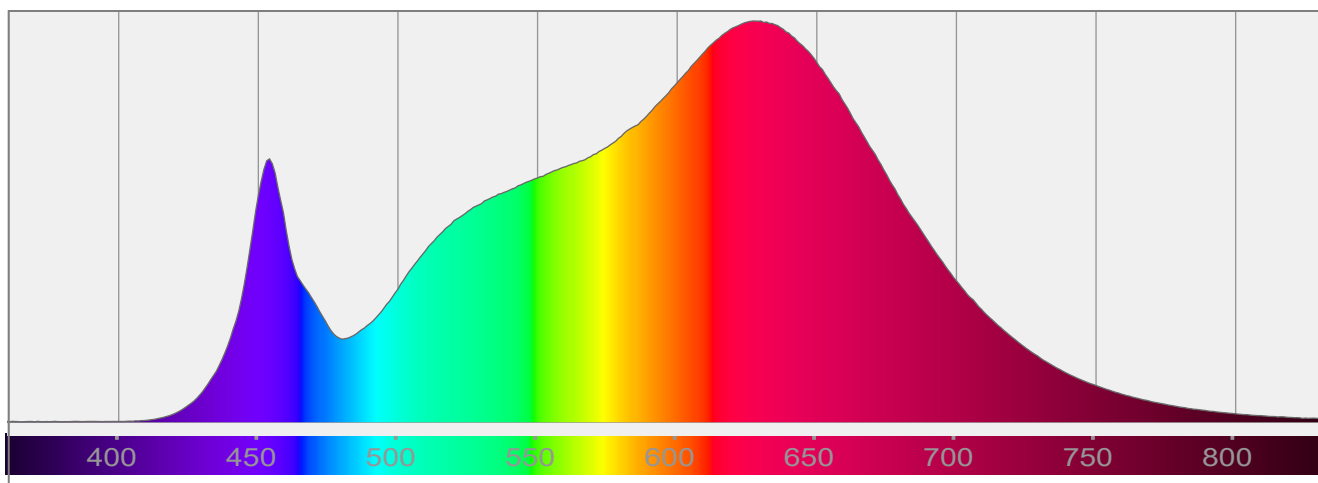


Color Details

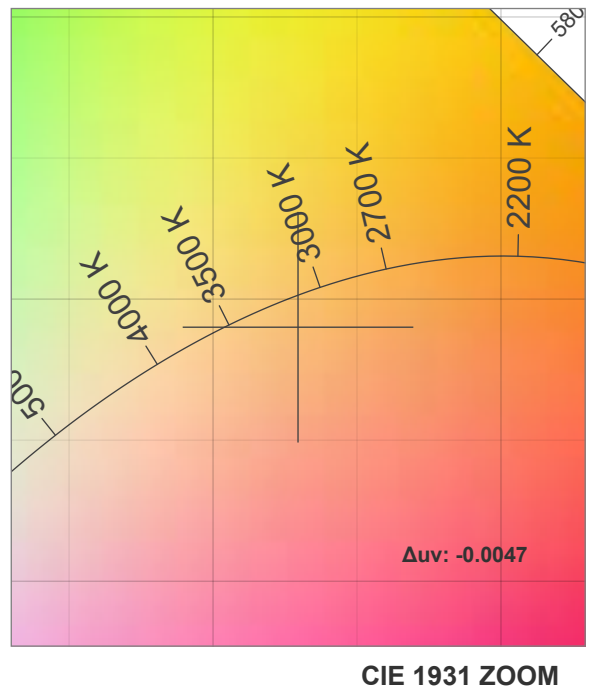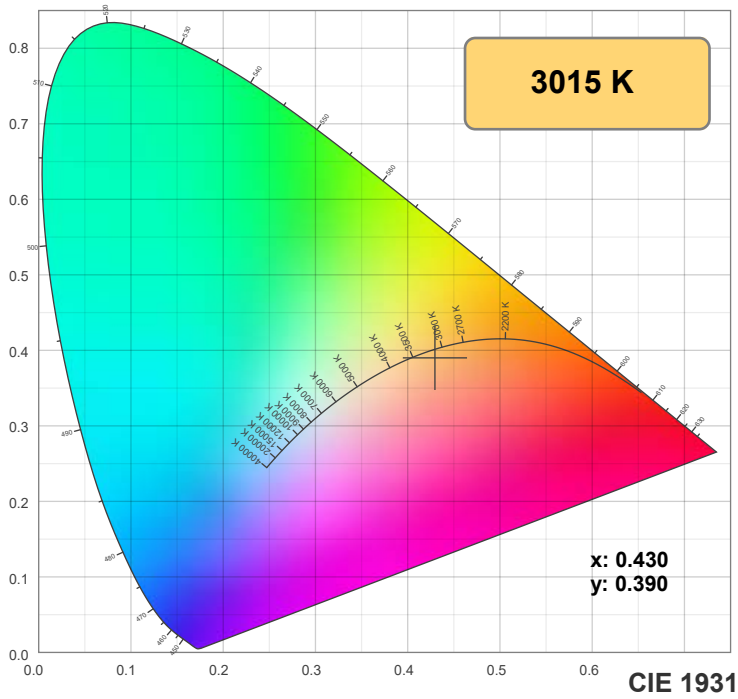

TM-30: 92.8

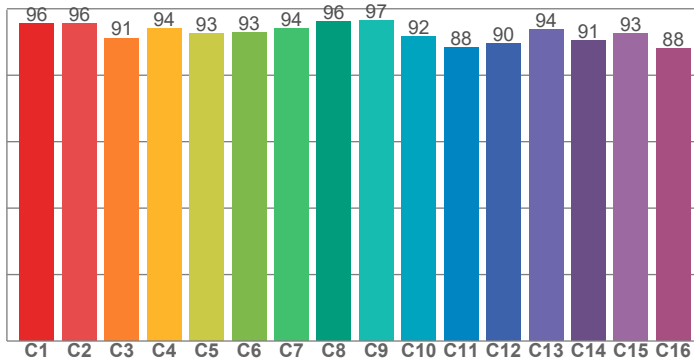

CRI: 96.8 (R1-R8)

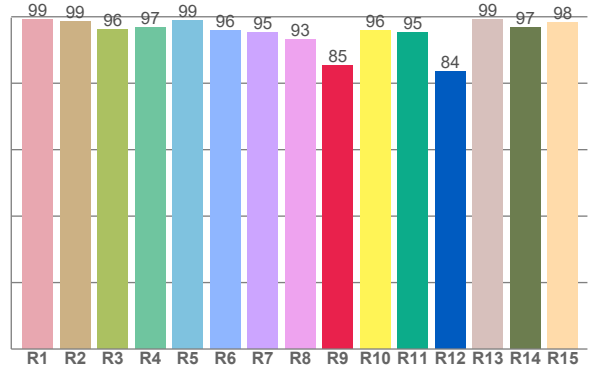

CRI R Values:

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
99.1	98.6	96.1	96.7	99.0	96.0	95.3	93.3	85.3	96.0	95.2	83.5	99.1	96.7	98.4


TM30 C Values:

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
95.5	95.6	91.2	94.1	92.5	92.9	94.1	96.1	96.5	91.6	88.4	89.6	93.6	90.5	92.6	88.1

CQS Q values:

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93.9	97.6	86.7	88.7	94.3	92.8	88.5	92.5	96.8	92.9	92.9	93.3	94.1	93.6	93.8

CQS: 92.2

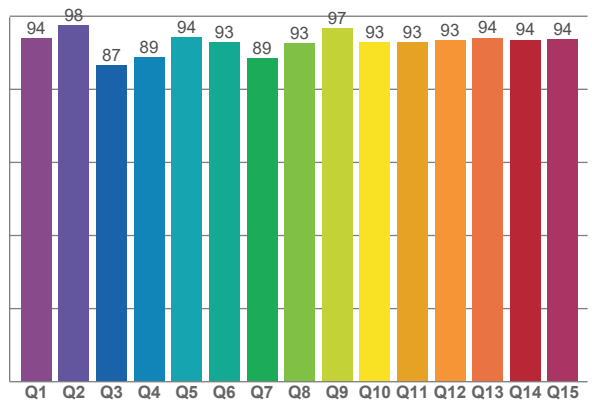

Color Parameters:

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3015 K	96.8	85.3	92.8	103.2	92.2	0.430	0.390	0.252	0.343	-0.0047

TM-30 Details







Rf 92.8

Fidelity index Rf

Rg 103.2

Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	96	-2%	0%
2	96	-1%	2%
3	91	1%	4%
4	94	1%	3%
5	93	1%	3%
6	93	5%	0%
7	94	1%	-1%
8	96	1%	-2%
9	97	0%	1%
10	92	-1%	5%
11	88	2%	8%
12	90	5%	3%
13	94	4%	-2%
14	91	6%	-5%
15	93	2%	-4%
16	88	2%	-10%

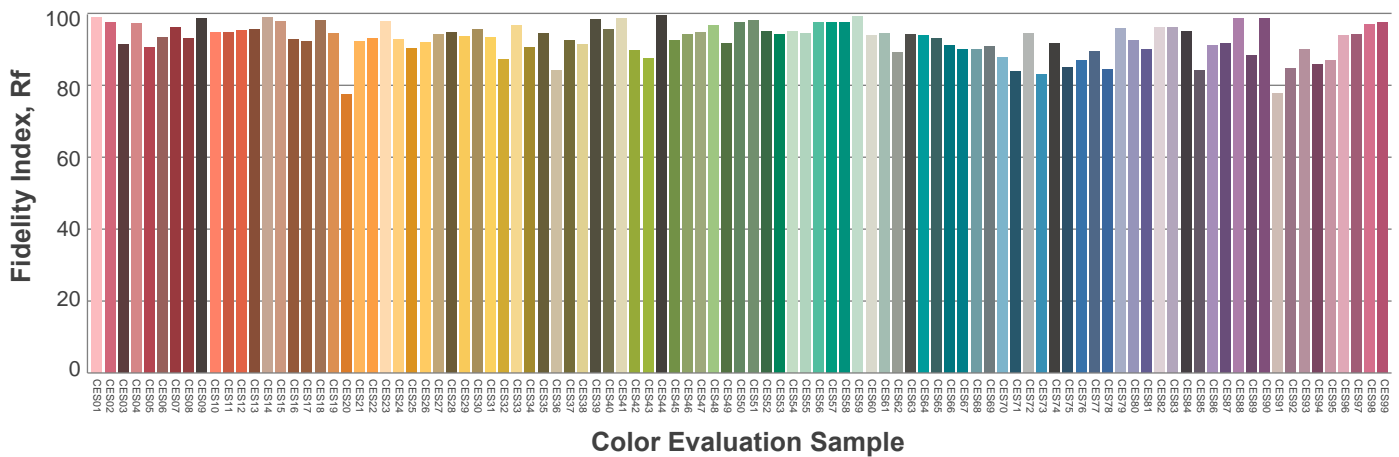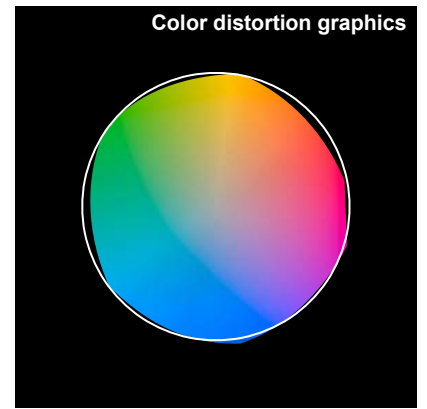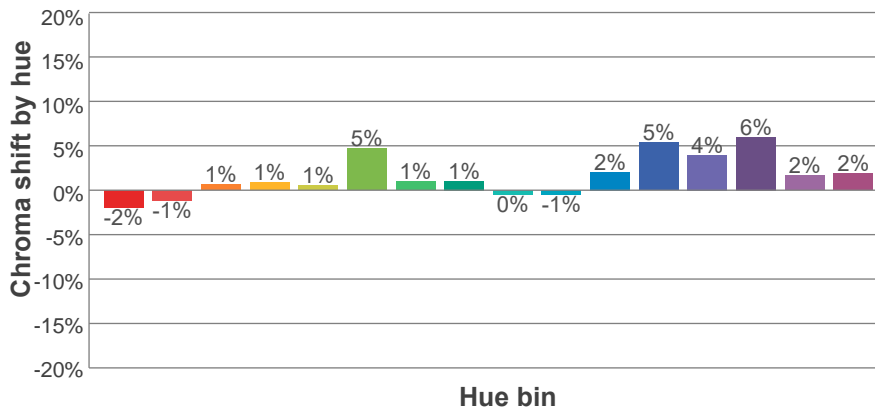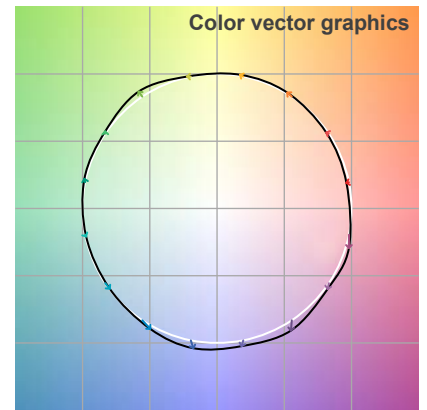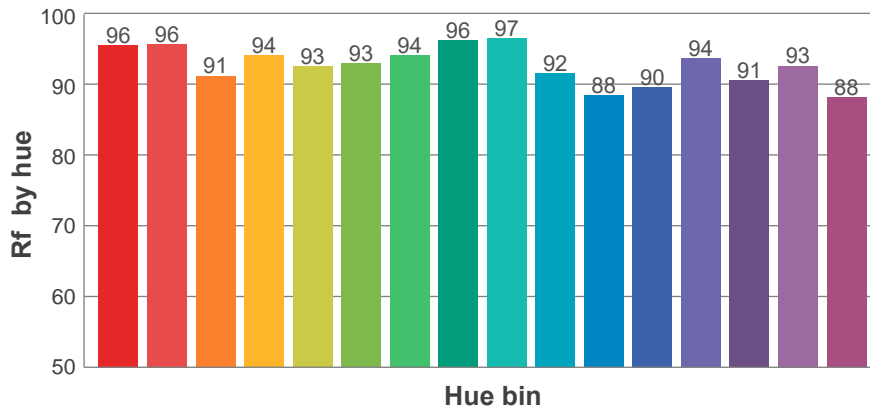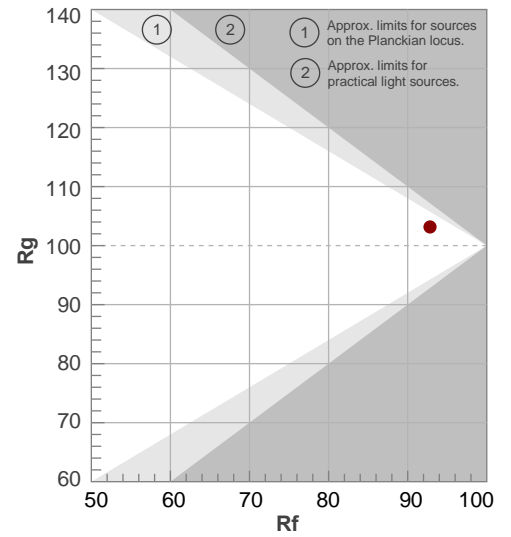

Aiming Angle

